

MEASUREMENT AND ALIGNMENT SYSTEMS
PRODUCT CATALOGUE

23

INTRODUCTION / DOCUMENTATION	3
SHAFT ALIGNMENT SYSTEMS	8
SHEAVE/PULLEY ALIGNMENT SYSTEMS	14
DIGITAL PRECISION LEVEL	16
VIBRATION MEASUREMENT TOOL	17
SPECIAL WIND SYSTEMS	18
GEOMETRIC MEASUREMENT SYSTEMS	20
MEASUREMENT PROGRAMS E and XT SERIES	34
DISPLAY UNITS	38
LASER TRANSMITTERS	39
DETECTORS AND OTHER RECEIVERS	41
MEASURING UNITS	43
BRACKETS AND MISCELLANEOUS PRODUCTS	45
SPARE PARTS	67
APPAREL / GIVE AWAYS	71
DISCONTINUED PRODUCTS	72
TECHNICAL SPECIFICATIONS AND DRAWINGS	80
SPECIFICATIONS FOR BATTERIES AND CHARGERS	81
PART NUMBER PAGE LIST	110

SYSTEM	PAGE
XT770 Shaft + GEO	8
XT770 Shaft	9
XT660 Shaft	10
XT550 Shaft Ex/ATEX	11
XT440 Shaft	12
E710 Shaft	13
XT190 BTA	14
D92 BTA	15
XT290 Digital Level	16
XT280 VIB	17
Wind Shaft Systems	18
XT980 Sawmill	20
E980 Sawmill	21
E970 Parallelism	22
E960-A Turbine alignment	23
E960-B Turbine alignment	24
E950-A Bore alignment	25
E950-B Bore alignment	26
E950-C Bore alignment	27
E950-D Bore alignment	28
E930 Extruder	29
E920 Geometric	30
E915 Flange Spin	31
E910 Flange	32




IMPORTANT INFORMATION

Please read the information on page 80 about specific technical limitations and product compatibilities, as well as explanation of specifications in this catalogue.

We reserve the right to make modifications of the product design and technical specifications without prior notification.

WHAT THE PICTURES SHOW

System picture. Does only show the main parts of the system, not all items that are included. Always read the Part list for complete system specification.

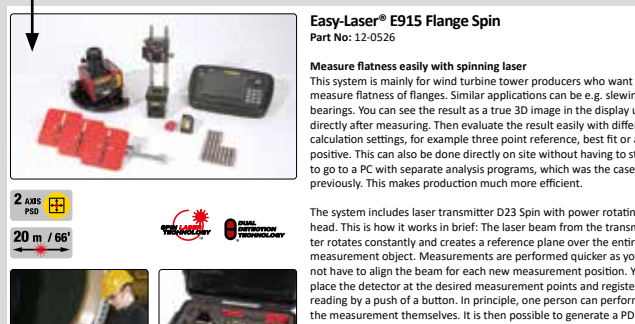

NOTE!

¹ Be aware that these pictures may show items that are not included for the specific part number.

[D] | [E] | [XT]: Indicates which product range the part is compatible with. If no letter is present, the part fits all ranges.

[XT*] | [D*] | [E*]: An asterisk * means bracket will need an adaptor to fit. Or XT App is needed also for D/E users.

Note: If there are other compatibility limitations these are mentioned for each product.



Main product picture ¹

Additional pictures ¹

Can show the system/product in an application, a product function or another view.

LEARN MORE ABOUT A SPECIFIC MEASUREMENT SYSTEM OR APPLICATION

In our measurement system brochures you can find more extensive technical specifications and more information on the systems and products in this Product overview. Available for download in many different languages from: www.easylaser.com



Easy-Laser® XT770



Easy-Laser® XT660



Easy-Laser® XT550 Ex



Easy-Laser® XT440



Easy-Laser® XT980



Easy-Laser® XT20/XT22



Easy-Laser® XT290



Easy-Laser® XT280



Easy-Laser® XT190



Easy-Laser® E980



Easy-Laser® E970



Easy-Laser® E960



Easy-Laser® E950



Easy-Laser® E930



Easy-Laser® E920



Easy-Laser® E910/E915



Easy-Laser® E710



Easy-Laser® E290



Easy-Laser® D92



STRAIGHTFORWARD BY ALL MEASURES

A reliable business partner

Easy-Laser® is one of the world's leading manufacturers and suppliers of laser measurement systems for all types of industry. We provide extreme accuracy and precision. But that's not what sets us apart. Today, when virtually anyone with a decent laser can do "straight", to get ahead, you need to be a bit more forward-thinking.

Because, in the long run, what really counts is neither the absolute straightness of an individual component nor the precise alignment of shafts. It's what these measures add up to: Increased productivity and the saving of resources. Those are the things we ultimately deliver. And from that perspective our most important task is to help you make the road leading there as free from bumps and bends as possible.

That means developing user-friendly measurement and alignment systems that are as easy to get your head around, as they are versatile and scalable. It also means shortening delivery times, extending warranties and optimizing training and support.

Moreover, you can always expect us, or any of our partners, to give you an honest opinion on which of our products are crucial to your operations and which you can do without. What really needs to be aligned and what not. So that what we offer you is a solution perfectly aligned with your needs – and your budget.

Regardless of whether you're a service technician, a purchaser or the CFO of a multinational industrial group, you'll find Easy-Laser® truly easy to deal with. Or as we like to put it – straightforward by all measures.

Worldwide distribution network

Easy-Laser® has representatives in over 70 countries. You find your local Easy-Laser retailer at our web page www.easylaser.com > contact

Long warranty

The systems come with a 3 year limited warranty. Learn more at easylaser.com/en-us/support/warranty. The quality system of the company is ISO9001 approved.



Our service concept


Our service department usually takes care of servicing or calibration within seven working days. All this makes Easy-Laser® a safer working partner for your operation. As an extra service, we provide a 48 hour express service for shaft alignment systems when accidents occur and time is of the essence. Contact us for further information about terms and conditions.



SUSTAINABILITY

– A RESPONSIBILITY FOR ALL OF US

Easy-Laser works actively with sustainability issues and supports the UN Global Compact's core principles* on the environment, anti-corruption, human rights and labour conditions. This permeates our entire business, every day.



Our working environment

It is important for us to be an inclusive and open workplace, where people enjoy working and want to stay for a long time. The relationship between us as an employer and our employees should be characterised by openness, respect and empowerment.

We embrace diversity.

We offer flexibility in terms of working hours and choice of workplace.

We work systematically with work environment issues.

We prevent health problems through annual health checks and wellness activities.

We measure satisfaction through a weekly staff survey.

Our products

By using Easy-Laser products, our customers can run a more sustainable business; a properly set-up machine will not break down prematurely and will not use more energy than necessary. But what about the environmental impact of our own products?

We strive to use sustainable materials in our products and for them to have a long service life.

We offer repair, calibration and maintenance of our products as close to the customer as possible.

Our operations

We strive to continually reduce the environmental impact of our own operations, large and small.

We recycle as much as possible, both from our production and our other activities.

We use carbon footprint compensated transports.

We use only fossil-free electricity.

Our social responsibility

We take responsibility in our local community but also globally through our cooperation with suppliers and distributors.

Both distributors and suppliers must meet the requirements set out in our Code of Conduct.

We will be good neighbours and seize opportunities to strengthen the communities in which we operate.

Short-term profitability shall not take precedence over long-term sustainability.

* <https://www.unglobalcompact.org/what-is-gc/mission/principles>

GENERATION XT

A declaration of independence



All XT programs in one free app

All XT measurement programs in one straightforward application available for free. Functionality for iOS, Android and Easy-Laser® XT display units.



No lock-ins

Buy with or without the user-friendly, shockproof and waterproof industrial grade Easy-Laser® XT12 display unit. Available with or without IR camera.



Maximum flexibility and trainability!

Purchase multiple systems with various capabilities, train once! The training costs are minimized significantly since the app interface and basic functionality is identical for all systems.



Long operating times

The long operating times of up to 16 hours for the Display unit and 24 hours for the Measuring units mean even the toughest jobs will be finished on time with no interruptions.

XT980

XT770

XT660

XT550

XT440

XT290


XT280

XT190

XT22

XT20

XT12

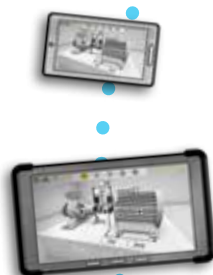

GET YOUR EASY-LASER® XT12
WITH THERMAL CAMERA!



EASY-LASER®

COMPLETE SYSTEMS

Note!

New display unit

We are replacing our previous display unit XT11 (discontinued) with the XT12. The XT Alignment App is compatible with both, as well as with 3rd party iOS/Android tablets like before.

One major change in this Product Catalogue revision 23 compared to the previous versions is that the display unit is never included with a complete XT system, but instead always added as a separate item.



2 AXIS
PSD

20 m / 66'


40 m / 132'
XT22

Note: Display unit XT12 not included, but added separately to the system. Laser transmitter XT20 pictured above.

Please also see the Programs and functions overview on page 35!



Standard items

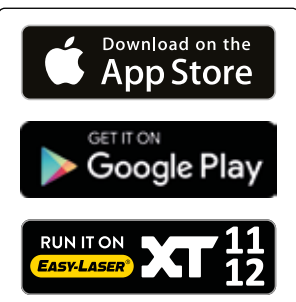

Large case GEO

With wheels and extendable handle



Large case GEO interior

Easy-Laser® XT770 Shaft+GEO

Part No: See below.

Multi-platform alignment system

Easy-Laser® XT770 is a multi-platform system. It runs on your iOS and Android unit¹. You can also choose a complete system by adding our ergonomic and rugged, IP66/67 approved shock proof Easy-Laser® XT12 display unit. Choose it with or without IR camera. The measuring units are also rugged and IP66/67 approved, featuring wireless technology, an integrated rechargeable battery and large 20x20 mm [0.79"x 0.79"] 2 axis TruePSD detectors and dot type laser technology. A built-in OLED display shows battery status and the angular value of the unit for easy positioning. Thanks to high capacity rechargeable batteries the operating times are very long: Display unit: 16 h, Measuring units: 24 h.

All functions are available in one app

Programs for alignment of horizontal, vertical/flange mounted machines, machine trains and cardan/offset mounted machines* plus EasyTrend for dynamic measurements* are included. Functions for soft foot check, thermal growth compensation and tolerance check. The XT70-M/S units allow for multipoint, continuous sweep and uncoupled sweep measurements. They also support the 360°LIVE move feature. With the Twist measurement program you easily check the base flatness. The very versatile Values program, together with the dot-type laser technology adds functionality for e.g. checking bearing clearance. The built-in Users Manual opens the relevant chapter depending on where in the process you are. (*requires accessories)

Geometric measurements

With the GEO kit added to your XT770 you will, using the Values, Straightness or Basic Flatness program, be able to do flatness and straightness measurements with the highest reliability and precision.

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download

Note: Magnet brackets on the case interior picture are accessories.

System without display unit, with XT20 GEO Kit (Part No. 12-1128)

Weight: 16.0 kg [35.3 lbs]



Learn more about the differences in the Technical specifications section at the back of this catalogue.

System without display unit, with XT22 GEO Kit (Part No. 12-1334)

Weight: 16.2 kg [35.7 lbs]

The XT770 GEO system contains:

- 12-1045 1 Measuring unit XT70-M
- 12-1046 1 Measuring unit XT70-S
- 12-0963 2 Shaft bracket with chain and rods
- 12-1008 2 Offset bracket for XT-series
- 12-0013 2 # Magnet bases
- 12-1161 1 Set of Rods 4x75 mm
- 12-0987 1 Rods (4x120 mm)
- 12-1060 1 Extension chain (2x900 mm)
- 03-0824 1 Measuring tape 3 m
- 03-0967 1 Hexagon wrench set
- 03-1256 1 Battery charger (100–240 V AC)
- 12-0989 1 DC split cable for charging
- 12-0751 1 DC to USB adapter, for charging
- 05-0913 1 Quick manual (Note: Refers to English manual)
- 03-0878 1 Cleaning cloth for optics
- 03-0914 1 USB memory stick with documentation
- 04-0307 1 Set of QR code stickers
- 12-0991 1 Documentation folder
- 12-1132 1 Carrying case Large GEO, with wheels
WxHxD: 580x460x295 mm [22.8x18.1x11.6"]

Add display unit XT12:

- 12-1292 1 XT12 with IR Camera
- 12-1291 1 XT12



Both are delivered with shoulder strap for display unit, Part No 12-0997.

Weight: 1490 g [52.5 oz]

GEO Kit for XT includes:

- 12-1272 (1) Laser transmitter XT20
- 12-1273 (1) Laser transmitter XT22
- 12-1275 1 Multi-bracket for XT laser transmitter
- 12-1133 1 Magnet base with turnable head (*replaces one of the regular magnet bases)
- 12-0987 1 Rods (4x120 mm)


XT Laser transmitter Upgrade Kits for older XT770 systems:

These kits are for upgrading of older versions of XT770. The interior of the included case fits XT12. Ask your local distributor for more information.

- 12-1320 1 Upgrade kit XT20
- 12-1321 1 Upgrade kit XT22

Note: Always check number of items included for each Part No. before ordering. Accessories not included in the specified system weight above.

(1) = Included depending on system Part No.




Note: Display unit XT12 not included, but added separately to the system.

Please also see the Programs and functions overview on page 35!



Standard items

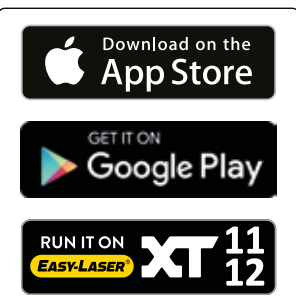

Large case

With wheels and extendable handle



Large case interior

Easy-Laser® XT770 Shaft

Part No: See below.

Multi-platform alignment system

Easy-Laser® XT770 is a multi-platform system. It runs on your iOS and Android unit¹. You can also choose a complete system by adding our ergonomic and rugged, IP66/67 approved shock proof Easy-Laser® XT12 display unit. Choose it with or without IR camera. The measuring units are also rugged and IP66/67 approved, featuring wireless technology, an integrated rechargeable battery and large 20x20 mm [0.79"x 0.79"] 2 axis TruePSD detectors and dot type laser technology. A built-in OLED display shows battery status and the angular value of the unit for easy positioning. Thanks to high capacity rechargeable batteries the operating times are very long: Display unit: 16 h, Measuring units: 24 h.

All functions are available in one app

Programs for alignment of horizontal, vertical/flange mounted machines, machine trains and cardan/offset mounted machines* plus EasyTrend for dynamic measurements* are included. Functions for soft foot check, thermal growth compensation and tolerance check. The XT70-M/S units allow for multipoint, continuous sweep and uncoupled sweep measurements. They also support the 360°LIVE move feature. With the Twist measurement program you easily check the base flatness. The very versatile Values program, together with the dot-type laser technology adds functionality for e.g. checking bearing clearance. The built-in Users Manual opens the relevant chapter depending on where in the process you are. (*requires accessories)

Geometric measurements

Please see systems XT770 GEO, Part No.12-1128 and 12-1334.

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download

Note: On the case interior picture accessories are also shown.

System without display unit, Large case (Part No. 12-1096)

Weight: 13.0 kg [28.7 lbs]

The XT770 system contains:

12-1045	1	Measuring unit XT70-M
12-1046	1	Measuring unit XT70-S
12-0963	2	Shaft bracket with chain and rods
12-1008	2	Offset bracket for XT-series
12-0013	2	Magnet bases
12-1161	1	Set of Rods 4x75 mm
12-0987	1	Rods (4x120 mm)
12-1060	1	Extension chain (2x900 mm)
03-0824	1	Measuring tape 3 m
03-0967	1	Hexagon wrench set
03-1256	1	Battery charger (100–240 V AC)
12-0989	1	DC split cable for charging
12-0751	1	DC to USB adapter, for charging
05-0913	1	Quick manual (Note: Refers to English manual)
03-0878	1	Cleaning cloth for optics
03-0914	1	USB memory stick with documentation
04-0307	1	Set of QR code stickers
12-0991	1	Documentation folder
12-1049	(1)	Carrying case Large, with wheels WxHxD: 580x460x295 mm [22.8x18.1x11.6"]

Add display unit XT12:

12-1292	1	XT12 with IR Camera
12-1291	1	XT12



Both are delivered with shoulder strap for display unit, Part No 12-0997.

Weight: 1490 g [52.5 oz]

Examples of accessories for XT770:

12-1151	1	Cardan bracket kit
12-1130	1	Dynamic measurement brackets (complete kit)
12-1147	1	Magnetic bracket for XT-series
12-1012	1	Thin shaft bracket for XT-series
12-1010	1	Sliding bracket for XT-series
12-1053	1	XT190 BTA Digital belt alignment tool
12-1090	1	XT280 Vibrometer

XT Laser transmitter Upgrade Kits for older XT770 systems:

These kits are for upgrading of older versions of XT770. The interior of the included case fits XT12. Ask your local distributor for more information.

12-1320	1	Upgrade kit XT20
12-1321	1	Upgrade kit XT22

Note: Always check number of items included for each Part No. before ordering.

Accessories not included in the specified system weight above.

(1) = Included depending on system Part No.



Easy-Laser® XT660 Shaft

Part No: See below.


Multi-platform alignment system

Easy-Laser® XT660 is a multi-platform system. It runs on your iOS and Android unit¹. You can also choose a complete system by adding our ergonomic and rugged, IP66/67 approved shock proof Easy-Laser® XT12 display unit. Choose it with or without IR camera.

The measuring units are also rugged and IP66/67 approved, featuring wireless technology, an integrated rechargeable battery and large 20x20 mm [0.79"x 0.79"] 1 axis TruePSD detectors and dot type laser technology. A built-in OLED display shows battery status and the angular value of the unit for easy positioning. Thanks to high capacity rechargeable batteries the operating times are very long: Display unit: 16 h, Measuring units: 24 h.



*Display unit XT12 not included, but added separately to the system.



Please also see the Programs and functions overview on page 35!



Standard items



All functions are available in one app

Programs for alignment of horizontal, vertical/flange mounted machines, machine trains (3 machines) and cardan/offset mounted machines* are included. Added to that are functions for soft foot check, thermal growth compensation and tolerance check. The XT60-M/S units allow for multipoint, continuous sweep and uncoupled sweep measurements. With the Twist measurement program you easily check the base flatness. As always, Easy-Laser® comes with the very versatile Values program, which together with the dot-type laser technology adds functionality for e.g. checking bearing clearance. The app has a built-in Users Manual, which opens the relevant chapter depending on where in the process you are. (*requires accessories)

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download

Note: the system can be delivered in two different carrying cases, model Large with space also for accessories. See pictures to the left.



Medium case



Medium case interior

System without display unit, Large case (Part No. 12-1059)

Weight: 10.9 kg [24.0 lbs] (without accessories)

System without display unit, Medium case (Part No. 12-1058)

Weight: 5.8 kg [11.0 lbs]

Please see example of Large case with wheels on XT770 system page.

The XT660 system contains:

12-1028	1	Measuring unit XT60-M
12-1029	1	Measuring unit XT60-S
12-0963	2	Shaft bracket with chain and rods
12-1161	1	Set of Rods 4x75 mm
12-1060	1	Extension chain (2x900 mm)
03-0824	1	Measuring tape 3 m
03-0967	1	Hexagon wrench set
03-1256	1	Battery charger (100–240 V AC)
12-0989	1	DC split cable for charging
12-0751	1	DC to USB adapter, for charging
05-0863	1	Quick manual (Note: Refers to English manual)
03-0878	1	Cleaning cloth for optics
03-0914	1	USB memory stick with documentation
04-0307	1	Set of QR code stickers
12-0991	1	Documentation folder
12-0973	(1)	Carrying case Medium WxHxD: 460x350x175 mm [18.1x13.8x6.9"]
12-1049	(1)	Carrying case Large, with wheels WxHxD: 580x460x295 mm [22.8x18.1x11.6"]

(1) = Included depending on system Part No.

Add display unit XT12:

12-1292	1	XT12 with IR Camera
12-1291	1	XT12

Both are delivered with shoulder strap for display unit, Part No 12-0997.
Weight: 1490 g [52.5 oz]



Examples of accessories for XT660:

12-0013	1	Magnet base (Note: offset bracket also needed.)
12-1008	1	Offset bracket for XT-series
12-1147	1	Magnetic bracket for XT-series
12-1012	1	Thin shaft bracket for XT-series
12-1010	1	Sliding bracket for XT-series
12-1161	1	Rods (4x75 mm)
12-0324	1	Rods (8x120 mm)
12-0060	1	Rods (4x240 mm)
12-1053	1	XT190 BTA Digital belt alignment tool
12-1090	1	XT280 Vibrometer
12-1244	1	XT290 Digital precision level

Note: always check number of items included for each Part No. before ordering.

Easy-Laser® XT550 Ex/ATEX Shaft

Part No: See below.

Shaft alignment system for hazardous areas

Easy-Laser® XT550 is designed for use in potentially explosive environments. For a complete system, add the zone 1/21 approved ECOM display unit. Built-in 13+8 MP cameras (rear+front) for documentation. The XT Alignment app also runs on other iOS and Android units. ^{1 2} The measuring units are rugged and IP66/67 approved, featuring wireless technology, an integrated rechargeable battery and large 20x20 mm [0.79"x 0.79"] 1 axis TruePSD detectors and dot type laser technology. A built-in OLED display shows battery status and the angular value of the unit for easy positioning. Using high capacity rechargeable batteries the operating times are very long; 20 hours.

All functions are available in one app

Programs for alignment of horizontal, vertical/flange mounted machines, machine trains and cardan/offset mounted machines* are included. Added to that are functions for soft foot check, thermal growth compensation and tolerance check. The XT50-M/S units allow for multipoint, continuous sweep and uncoupled sweep measurements. With the Twist measurement program you easily check the base flatness. As always, Easy-Laser® comes with the very versatile Values program, which together with the dot-type laser technology adds functionality for eg. checking bearing clearance. The app has a built-in Users Manual, which opens the relevant chapter depending on where in the process you are. (*requires accessories)

Note: the system can be delivered with or without the ECOM tablet.

For local purchase, find your ECOM reseller here:


<https://www.ecom-ex.com/company/locations/>

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download

²For use in potentially explosive environments, the display device you use has to be at least approved for the same level of Ex/ATEX requirements as your work zone. Note that the XT12 isn't ATEX approved.



*Display unit is not included, but added separately to the system.



Please also see the Programs and functions overview on page 35!



Standard items



Note! XT12/XT11 are not ATEX approved.



System without display unit, EX approved case (Part No. 12-1031)

Weight: 6.9 kg [15.2 lbs]

The XT550 system contains:

12-1026	1	Measuring unit XT50-M Ex/ATEX
12-1027	1	Measuring unit XT50-S Ex/ATEX
12-1040	2	Shaft bracket Ex/ATEX, with chain and rods
12-1161	1	Set of Rods 4x75 mm
01-0873	2	Rods 120 mm
12-1038	2	Extension chain (900 mm)
03-0824	1	Measuring tape 3 m
03-0967	1	Rod tool
12-1281	1	Battery charger (100–240 V AC)
12-0989	1	DC split cable for charging
05-0889	1	Quick manual (Note: Refers to English manual)
03-0878	1	Cleaning cloth for optics
03-0914	1	USB memory stick with documentation
04-0307	1	Set of QR code stickers
12-1063	1	Carrying case
WxHxD: 450x300x180 mm [17.7x11.8x7.1"]		

Add display unit ecom:

12-1327	1	ecom TabEx03
Weight: 1100 g [38.8 oz]		



Examples of accessories for XT550:

12-0013	1	Magnet base (Note: offset bracket also needed.)
12-1008	1	Offset bracket for XT-series
12-1147	1	Magnetic bracket for XT-series
12-1012	1	Thin shaft bracket for XT-series
12-1010	1	Sliding bracket for XT-series
12-1161	1	Rods (4x75 mm)
12-0324	1	Rods (8x120 mm)
12-0060	1	Rods (4x240 mm)

Note: always check number of items included for each Part No. before ordering.

CERTIFICATIONS:

XT50 measuring units:

EX certificate number: Presafe 17 ATEX 10552X, IECEx PRE 17.0049X

EX classification: Ⓢ II 2 G Ex ib op is IIC T4 Gb, -10°C ≤ Ta ≤ +50°C

ecom display unit TabEx03:

EX certificate number: EPS 22 ATEX 1055 X, IECEx EPS 22.0014X

ATEX/UKCA Ex classification: Ⓢ II 2G Ex db ia IIC T6 Gb IP64, -20°C ≤ Ta ≤ +55°C,

Ⓢ II 2D Ex ia tb IIIC T80°C Db, -20°C ≤ Ta ≤ +55°C

IECEx classification: Ex db ia IIC T6 Gb IP64, -20°C ≤ Ta ≤ +55°C,

Ex ia tb IIIC T80°C Db, -20°C ≤ Ta ≤ +55°C



Easy-Laser® XT440 Shaft

Part No: See below.

Multi-platform alignment system

Easy-Laser® XT440 is a multi-platform system. It runs on your iOS and Android unit¹. You can also choose a complete system by adding our ergonomic and rugged, IP66/67 approved shock proof Easy-Laser® XT12 display unit. Choose it with or without IR camera. Shoot a thermal image before and after alignment and include with the documentation!

The measuring units are also rugged and IP66/67 approved, featuring wireless technology, an integrated rechargeable battery and large 30 mm [1.2"] TruePSD detectors. A built-in OLED display shows battery status and the angular value of the unit for easy positioning. Thanks to high capacity rechargeable batteries the operating times are very long: Display unit: 16 h, Measuring units: 24 h.



*Display unit XT12 not included, but added separately to the system.

Please also see the Programs and functions overview on page 35!



Standard items



All functions are available in one app

Programs for alignment of both horizontal and vertical machines are included. Added to that are functions for soft foot check, thermal growth compensation and tolerance check. As always, Easy-Laser® comes with the very versatile Values program. The app has a built-in Users Manual, which opens the relevant chapter depending on where in the process you are.

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download



System XT440 without display unit (Part No. 12-0966):

12-0943	1	Measuring unit XT40-M
12-0944	1	Measuring unit XT40-S
12-0963	2	Shaft bracket with chain and rods
12-1161	1	Set of Rods 4x75 mm
03-0824	1	Measuring tape 3 m
03-0967	1	Hexagon wrench set
03-1256	1	Battery charger (100–240 V AC)
12-0989	1	DC split cable for charging
12-0751	1	DC to USB adapter, for charging
05-0833	1	Quick manual (Note: Refers to English manual)
03-0878	1	Cleaning cloth for optics
03-0914	1	USB memory stick with documentation
04-0307	1	Set of QR code stickers
12-0991	1	Documentation folder
12-0973	1	Carrying case Medium
		Weight: 5.3 kg [11.8 lbs]
		WxHxD: 460x350x175 mm [18.1x13.8x6.9"]

Note: always check number of items included for each Part No. before ordering.

Add display unit XT12:


12-1292	1	XT12 with IR Camera
12-1291	1	XT12



Both are delivered with shoulder strap for display unit, Part No 12-0997.
Weight: 1490 g [52.5 oz]

Examples of accessories for XT440:

12-0013	1	Magnet base (Note: offset bracket also needed.)
12-1008	1	Offset bracket for XT-series
12-1147	1	Magnetic bracket for XT-series
12-1012	1	Thin shaft bracket for XT-series
12-1010	1	Sliding bracket for XT-series
12-1161	1	Rods (4x75 mm)
12-0324	1	Rods (8x120 mm)
12-0060	1	Rods (4x240 mm)
12-1060	1	Extension chain (2x900 mm). For diameters up to 450 mm [12.7"].
12-1053	1	XT190 BTA Digital belt alignment tool
12-1090	1	XT280 Vibrometer
12-1244	1	XT290 Digital precision level



Easy-Laser® E710 Shaft

Part No: 12-0440

The measurement system for all stages of machine set-up

Easy-Laser® E710 gives you all the functions for shaft alignment plus the opportunity to check the machine base and any bearing play using the standard equipment! Programs for Horizontal machines, soft foot checks, Machine trains, vertical/flange mounted and cardan/offset mounted* machines are included. Furthermore programs for Straightness, Flatness/Twist and Parallelism measurement are included. Using accessories you can also align sheaves/pulleys with digital precision. The keys to the system flexibility and wide range of use are the measuring units with 2-axis TruePSD detectors, and the dual laser beams.

Large, clear colour screen, wireless measuring units, long operating life and robust design give a measurement system that is both reliable and easy to use.

The measurement values can be registered with only 40° rotation of the shafts. You then align the machine "live" using the measuring units in any position around the shaft. The display unit program is available in several different languages which facilitates use; English, German, French, Spanish, Portuguese, Swedish, Finnish, Russian, Polish, Dutch, Italian, Japanese, Korean and Chinese.

**Cardan bracket is optional equipment.*

A complete system contains:

12-0418	1	Display unit E51
12-0433	1	Measuring unit ES
12-0434	1	Measuring unit EM
12-1336	2	Wireless units
12-0074	2	Cables 2 m
12-0016	2	Shaft bracket with chain
12-0128	2	Extension chain
12-0013	2	Magnet base
01-1165	2	Offset bracket
01-0873	4	Rods 120 mm
12-0059	1	Set of Rods 4x60 mm
05-0461	1	Manual (Note: Refers to English manual)
05-0486	1	Quick manual (Note: Refers to English manual)
03-0824	1	Measuring tape 3 m
03-0914	1	USB memory stick with documentation
03-0822	1	USB cable
03-1243	1	Battery charger (100–240 V AC)
03-0792	2	Toolbox
12-0495	1	Shoulder strap for Display unit
03-0878	1	Cleaning cloth for optics
12-0442	1	Carrying case

Complete system:

Weight: 10.0 kg [22.0 lbs]

WxHxD: 500x400x200 mm [19.7x15.7x7.9"]

Examples of accessories:

12-1053	1	XT190 BTA
12-1147	1	Magnetic bracket
12-1012	1	Thin shaft bracket
12-1010	1	Sliding bracket
12-1151	1	Cardan bracket
12-0597	1	Splitter box
12-0059	1	Rods (4x60 mm)
12-0324	1	Rods (8x120 mm)
12-0060	1	Rods (4x240 mm)
12-1060	1	Extension chain (2x900 mm). For diameters up to 450 mm [12.7"].
12-0022	1	Laser transmitter D22

Note: always check number of items included for each Part No. before ordering.



Easy-Laser® XT190 BTA digital Wireless

Part No: 12-1053

“Live” digital read outs on clear OLED display


The detector reads off the position in relation to the laser plane and digitally displays the parallel and angular misalignment “live” on the clear built-in OLED display. The accuracy of the reading means that you can be within the prescribed alignment tolerances and rely upon the result. Suitable for most types of drive, such as V-belt, timing belt, flat belt and chain drives.

The laser transmitter has two power modes (high/low) which now makes it possible to measure on very long distances. The low power mode saves battery life.


If you connect the detector wirelessly to a separate display unit, e.g. one of our shaft alignment systems, you can read and follow the alignment from where you are standing and making adjustments, instead of only where the detector is mounted. Then you can also set a tolerance and document the result of the alignment.

(Note 1: The XT190 detector unit connects to both the E- and XT-series display units. You can also use it with your iOS and Android phone/tablet. Please see our web site for compatible models.)


(Note2: There is no separate display unit included. The detector connects wireless to the E51/E52 and XT12/XT11 display units with Belt alignment program.)



Built-in display on detector unit. Angle and offset.

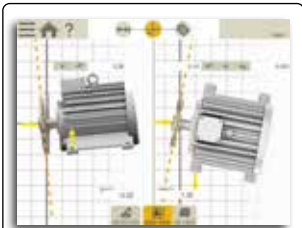

XT app for XT12/XT11 and iOS/Android display units.

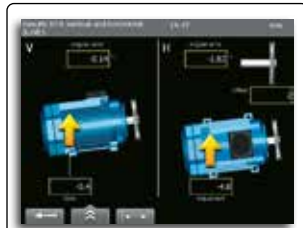

Belt alignment program for E51 and E52.

A complete system contains:

12-1325	1	Laser transmitter
12-1054	1	Detector unit with built-in display, wireless
12-0394	2	Targets
03-1256	1	Charger (100–240 V AC) and cable
03-0247	1	Battery R6 (AA) 1.5 V
03-0914	1	USB memory stick with documentation
05-0865	1	Quick manual (Note: Refers to English manual)
12-0804	1	Carrying case



10 m / 33'

Easy-Laser® D92 BTA

Part No: 12-1332



For quick and easy alignment of sheaves/pulleys

Easy-Laser® D92 is installed in a few seconds, and the laser line that is projected on the targets clearly shows how to adjust the machines. The tool has targets that can be read out “visually” and which give excellent degrees of accuracy that are sufficient for most users.


The laser transmitter has two power modes (high/low) which now makes it possible to measure on very long distances. The low power mode instead saves battery life.

If, in the future, you wish to have the option of digital readouts with the corresponding advantages, you can add a digital detector (see system XT190).

D92 BTA is compact and light. Suitable for most types of drive, such as V-belt, timing belt, flat belt and chain drives.

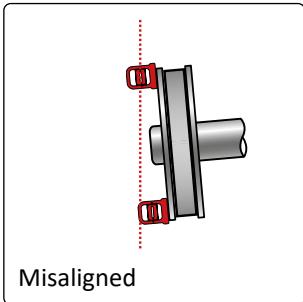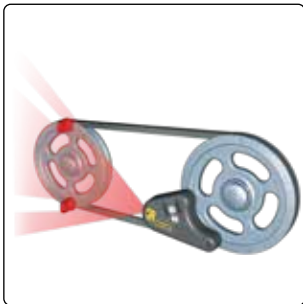

Misaligned

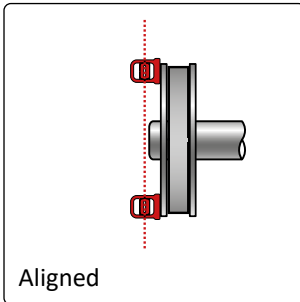

Aligned

A complete system contains:

12-1325	1	Laser transmitter
12-0394	2	Target
05-0352	1	Manual
03-0247	1	Battery R6 (AA) 1.5 V
03-0591	1	Padded cover



Easy-Laser® XT290 Digital precision level

Part No: 12-1244

For reliable machinery installation

Digital levels are extremely useful tools for setting-up and aligning most types of machines, for example, levelling machine bases, rolls, tables, etc. 0.1 mm/m [mils/inch] is a normal requirement for level at machine installations to ensure correct functionality. Other applications include checking straightness, flatness and parallelism. Easy-Laser® XT290 is simply the must-have addition to your laser-based alignment system.

Accuracy is guaranteed by the precision-ground, hardened steel base. Wide measurement range, very fast inclinometer/value stabilisation, and an easy-to-read TFT colour display with graphics makes the measurement procedure quick and easy. Two mounting holes allow for your own adaptations and brackets.

Connect to a separate display unit

The XT290 connects to the free XT Alignment app (iOS/Android) and our XT12/XT11 display unit. Using a separate display unit, for example your smartphone, makes it all even easier as you can read off and follow the adjustment at the point on the machine where the adjustment is made. It is also safer for some applications, where you can leave the unit inside the safety fence, then follow the measurement outside it.

You can make a measurement report with pictures and share it (PDF and Excel). Using the app you can also record values during a set time and frequency, i.e. dynamic measurements. Another possibility with the app is to connect up to four digital levels (or e.g. two levels and two measuring units) at the same time, displayed in the same screen view.

Precision level accuracy: $\pm 0.02 \text{ mm/m} \pm 1\%$ [$\pm 0.02 \text{ mils/inch} \pm 1\%$]

Inclinometers accuracy: $\pm 0.2^\circ$ (within range $\pm 5^\circ$), $\pm 1^\circ$ (within range $\pm 180^\circ$)

Please see chapter *Technical specifications and drawings* for more data.

(Note: The XT290 does not work with the E-series display units. You can of course still use it as a separate tool.)

INCLINOMETERS
2-AXIS

Download on the
App Store

RUN IT ON
EASY-LASER XT 11/12

PRECISION LEVEL
1-AXIS

GET IT ON
Google Play

EASY-LASER BUILT-IN
DISPLAY



Built-in display on unit.



System case.



XT app for XT12/XT11 and iOS/Android display units.



Legs for measurement on large cylindrical surfaces.

A complete system contains:

12-1241	1	Digital Precision Level
01-1402	1	Screw for mounting safety strap*
03-1256	1	Charger (100–240 V AC) and cable
03-0914	1	USB memory stick with documentation
05-0990	1	Quick manual (Note: Refers to English manual)
12-1243	1	Carrying case

Complete system:

Weight: 2.2 kg [4.85 lbs]

WxHxD: 270x240x120 mm [10.6x9.4x4.7"]

Examples of accessories:

12-0901	1	Legs for measurement on cylindrical surfaces 55–800 mm
03-1406	1	Safety strap Bahco 3875-LY2*

*Please note that safety regulations differ from country to country.



XT280 Vibrometer

Part No: 12-1090

FOR QUICK VIBRATION ANALYSIS

Easy-Laser® XT280 is an easy-to-use vibration monitoring and analysis tool that allows easy display of vibration signals. The XT280 automatically performs vibration analysis functions based on machine running speed to help diagnose faults such as unbalance, misalignment and looseness. The system is designed to enable you to take vibration measurements from assets like pumps, motors, fans and bearings. The unit displays vibration frequency plots and allows vibration severity and bearing condition to be monitored.

For documentation purpose, you can connect the XT280 to the XT Alignment App. Run the app on your phone or tablet*, or the XT12/XT11 display unit.

* Please see our web site for compatible models.



7.5

ISO

mm/s

23

BDU

0.4

g

Built-in display.

Padded case

XT app for XT12/XT11 and iOS/Android display units.

Stinger

Accelerometer magnet

- A complete system contains:**
- 12-1050 1 Vibrometer (with short tip)
 - 05-0934 1 Quick manual
 - 03-0914 1 USB memory stick with documentation
 - 03-1429 1 Screw driver Torx T8
 - 03-1336 1 Padded case

- Examples of accessories:**
- 03-1327 1 Accelerometer magnet
 - 03-1326 1 Stinger (100 mm)

12-1143



12-1142

1 AXIS
PSD

10 m / 33'



Shaft alignment system for Vestas wind turbines

Part No: 12-1143 (Vestas 5/VT20025637)

Part No: 12-1284 (Vestas 5.5 - Mechanical bracket kit)

Part No: 12-1142 (Vestas 6/VT20025635)

Part No: 12-1183 (Installation Kit Upgrade)

For shaft alignment with the rotor locked.

Large forces are in action in a wind turbine. The safety of the maintenance technicians is therefore of the utmost importance. With the Easy-Laser® shaft alignment system the generator and gearbox can be aligned with the coupling dismantled and the brake locked.

The Easy-Laser® Vestas shaft alignment systems consist of one general installation kit, one supplement kit for use on more turbines, plus one upgrade kit (or just the bushings, see below).

Installation kit, Wireless, Vestas 5.

Mechanical bracket kit, Vestas 5.5.

Same as Vestas 5, but without display unit, measuring units, printer and associated items like cables, see items marked with * in the list.

Supplement Service kit, Vestas 6.

Installation Kit Upgrade

If you have an older system Vestas 4 you can upgrade this for use at MK3E.

Please note that the brackets in all kits fit both E-series and XT-series measuring units. New design of bracket shown below.



A Vestas 5 system contains:

- 12-0700* 1 Display unit E52
- 01-1379* 1 Protective case for display unit E52
- 12-0777* 1 Measuring unit ELS40, PSD 30 mm, inclinometer
- 12-0776* 1 Measuring unit ELM40, PSD 30 mm, inclinometer
- 12-0712 5 Nut to adapters with magnet M6 V112
- 12-0714 4 Screw to Adapters V112, L=75mm
- 12-0713 2 Fixture Kit for V112
- 01-1520 4 Adaptor for fixture V112
- 03-0613 1 Distance gauge incl. adaptor, incl. fastening screw L=35mm
- 03-1034 1 Distance gauge incl. adaptor, incl. fastening screw L=55mm
- 01-2163 1 Bushings for MK3E / V150
- 01-2142 1 Bushings for MK3E / V150
- 01-2143 2 Washer for MK3E / V150
- 12-1140 2 Screw to bushings V150 L=45mm
- 12-0495* 1 Strap to display unit
- 03-0914* 1 USB memory stick 4GB
- 03-0822* 1 USB cable A to B 1.8 m
- 03-1243* 1 Battery charger (100-240 V AC) Lev. 6
- 12-0989* 1 DC split cable for charging
- 12-0751* 1 DC to USB adapter, for charging
- 03-1004* 1 Printer Seiko DPU-S445, including charger, cable and USB
- 03-0824 1 Measurement tape 3m
- 05-0954* 1 Manual E540 Vestas
- 12-1164 1 Carrying Case Vestas 5

Weight: 28 kg [61.7 lbs]

WxHxD: 670x600x220 mm [26.4x23.6x8.7]

* These items are not included with Vestas 5.5.

System weight: 25 kg [55.1 lbs]

A Vestas 6 system contains:



- 12-0703 1 Detector-fixture Generator flange
- 12-0297 2 Screw knob to Generator fixture M12
- 12-0298 2 Screw knob to Generator fixture M16
- 12-0718 1 Detector-fixture Gearbox flange
- 01-0815 3 Adapter for Gearbox fixture 25 mm
- 01-0816 3 Adapter for Gearbox fixture 24 mm
- 01-0817 3 Adapter for Gearbox fixture 22 mm
- 01-0818 3 Adapter for Gearbox fixture 17 mm
- 12-0296 3 Screw to adapters
- 12-0299 4 Nut to adapters with magnet M6
- 12-1165 1 Carrying case Vestas 6

Weight: 12.3 kg [27.1 lbs]

WxHxD: 570x470x220 mm [22.4x18.5x8.7]

A Vestas Laser Installation Upgrade Kit contains:

- 12-1154 1 Bushings for MK3E, set of 2 (VT20025636)
- 12-1164 1 Carrying case Vestas 5
- 12-1165 1 Carrying case Vestas 6

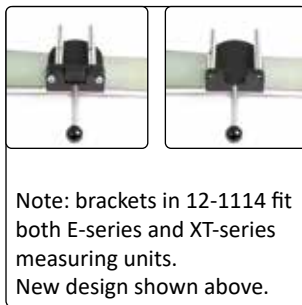

Shaft alignment system GA1 for wind turbines

Part No: 12-1118 (Includes 12-1113+12-1114)

For shaft alignment with the rotor locked.

Large forces are in action in a wind turbine. The safety of the maintenance technicians is therefore of the utmost importance. With the Easy-Laser® shaft alignment system the generator and gearbox can be aligned with the coupling dismantled or in place. This system is designed especially for Gamesa turbines, and fits all their turbine sizes. The measurement programs are easy to learn and to use, and there are numerous options for documenting and saving the result of the work.

NOTE:

Complete system GA1, Part No. 12-1118 consist of Part No. 12-1113+12-1114, but still come in two separate carrying cases. 12-1113 and 12-1114 also sold separately.

12-1118



System 12-1113 contains:

- 12-0700 1 Display unit E52
- 01-1379 1 Protective case for display unit
- 12-0777 1 Measuring unit ELS40
- 12-0776 1 Measuring unit ELM40
- 12-0016 1 Shaft bracket with chain
- 12-0626 1 Chain 900 mm complete
- 12-0059 1 Rods $\varnothing 10 \times 60$ mm, set of 4 pcs
- 01-0873 4 Rods $\varnothing 10 \times 120$ mm
- 12-0987 1 Rods $\varnothing 10 \times 120$ mm, set of 4 pcs
- 12-1147 1 Magnetic bracket
- 01-1165 1 Offset bracket
- 03-0045 1 Screw MC6S M6x16 mm
- 05-0689 1 Quick manual
- 05-0809 1 Manual GA1
- 03-0824 1 Measuring tape 3.0 m
- 03-0914 1 USB memory stick 4GB
- 03-0822 1 USB cable A to B 1.8 m
- 03-1243 1 Battery charger (100-240 V AC)
- 12-0989 1 DC Split cable, for charging
- 12-0751 1 DC to USB adapter, for charging
- 03-0792 1 Toolbox
- 03-0967 1 Hexagon wrench set
- 01-0048 1 Rod tightening tool, 4 mm
- 12-0495 1 Strap to display unit
- 12-1020 1 Plastic carrying case for 12-1113

Weight: 8.0 kg [17.6 lbs]
WxHxD: 500x400x200 mm [19.7x15.7x7.9"]

System 12-1114 contains:

- 12-0975 1 Detector-fixture Generator flange GA1
- 01-1889 2 Adapters to Generator flange GA1 M24
- 01-1892 2 Adapters to Generator flange GA1 $\varnothing 40$
- 01-1891 2 Adapters to Generator flange GA1 $\varnothing 31$
- 01-1890 2 Adapters to Generator flange GA1 $\varnothing 25$
- 12-0974 2 Screw to Adapters L=120mm
- 12-0712 2 Nut to adapters with magnet M6
- 12-0976 1 Detector-fixture Gearbox flange GA1
- 12-0977 3 Screw M24 for Gearbox fixture
- 12-0978 3 Screw M30 for Gearbox fixture
- 01-1884 3 Adapters for M24 Screw to Gearbox fixture
- 01-1885 3 Adapters for M30 Screw to Gearbox fixture
- 03-0613 1 Distance Gauge (coupling flanges), incl. adapter
- 03-1034 2 Ext. adapter distances gauge
- 12-1116 1 Plastic carrying case for 12-1114

Weight: 17.0 kg [37.5 lbs]
WxHxD: 565x455x210 mm [22.2x17.9x8.2"]

Easy-Laser® XT980 Sawmill

Part No: 12-1335

Measurement and alignment of sawmill machinery

Easy-Laser® XT980 is a laser based measurement and alignment system that helps sawmills to make optimal use of their machines. By setting the machines up correctly it is possible to maintain a high rate of production with the highest quality end products hour after hour. Laser transmitter XT22 has a manually rotated laser head with an angular prism, making it very versatile and suitable for most geometrical measurements.

With Easy-Laser® XT980 measuring and adjustment of reducers, counterholds, saw blades and discs become a simple and quick task. The laser line works as an absolutely straight ruler for 40 metres, and is very practical for the demanding and dusty environment of a sawmill. It replaces the long wire used traditionally, and gives many more possibilities for aligning the saw equipment. It can be used equally well for circular saws and band saws.

Benefits of using Easy-Laser® XT980 are:

- Higher production speed
- Less unplanned downtime
- Better product quality
- Longer lifetime for blades
- Longer lifetime for bearings
- Less vibration
- Less waste material


There is a standard system configuration plus some useful accessories. Together with our Easy-Laser representative, the system is adapted to best fit your actual machinery.

The measurement app runs on your iOS and Android unit¹. You can also choose a complete system with our ergonomic and rugged, IP66/67 approved shock proof Easy-Laser® XT display unit. Choose it with or without IR camera.

¹Please see our web site for a complete list of which tablets we recommend: easylaser.com > support > software download



*Display unit XT12 not included, but added separately to the system.



Please also see the Programs and functions overview on page 35!



Standard items
(except QR code stickers)



The XT980 system contains:

12-1273	1	Laser transmitter XT22
12-1045	1	Measuring unit XT70-M
03-0833	2	Electronic target
12-1275	1	Multi bracket for XT laser
12-1133	1	Magnet base with turnable head
12-0013	1	Magnet base
12-0963	1	Shaft bracket with chain
12-1008	2	Offset bracket
12-0624	2	Bracket for electronic target
12-1209	1	Rotating detector bracket for rods
12-1210	1	Magnet bracket long, with turnable head
12-1211	1	Magnet bracket short, with turnable head
12-1087	1	Set square bracket for index table
12-1083	1	Index table 90°
12-0987	2	Set of Rods (4x120 mm)
12-1161	1	Set of Rods (4x75 mm)
12-1232	2	Large target with magnets
05-0993	1	Quick Guide (English)
03-0842	1	Measuring tape 5 m
12-1299	1	Documentation folder GEO
03-0822	1	USB cable
03-1256	1	Battery charger (100–240 V AC)
12-0989	1	DC split cable for charging
12-0751	1	DC to USB adapter
03-1419	2	Screw clamps
03-0967	1	Hexagon wrench set
12-1300	1	Toolbox XT GEO
12-1298	1	Transportation case, with wheels

Add display unit XT12:

12-1292	1	XT12 with IR Camera
12-1291	1	XT12



Both are delivered with shoulder strap for display unit, Part No 12-0997.

Weight: 1490 g [52.5 oz]

Examples of accessories:


12-1010	1	Sliding bracket for XT-series
12-0060	1	Rods (4x240 mm)
12-1262	1	Detector bracket for centering on wire position
12-0503	1	Bracket (Set square) for transmitter
12-1123	1	Extension for set square 12-1087, 295 mm
12-1124	1	Extension for set square 12-1087, 430 mm
12-1060	1	Extension chain (2x900 mm). For diameters up to 450 mm [12.7"].
12-1053	1	XT190 BTA Digital belt alignment tool
12-1090	1	XT280 Vibrometer
12-1244	1	XT290 Digital precision level

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 28.0 kg [61.7 lbs]

WxHxD: 622x492x310 mm [24.5x19.4x12.2"]



Easy-Laser® E980 Sawmill

Part No: 12-0727

Measurement and alignment of sawmill machinery

Easy-Laser® E980 is a laser based measurement and alignment system that helps sawmills to make optimal use of their machines. By setting the machines up correctly it is possible to maintain a high rate of production with the highest quality end products hour after hour.

With Easy-Laser® E980 measuring and adjustment of reducers, counterholds, saw blades and discs become a simple and quick task. The system has the D23 Spin laser transmitter (motor driven laser head), which makes it easier for just one person to measure, if required. It replaces the long wire used traditionally, and gives many more possibilities for aligning the saw equipment. Thanks to the user friendliness of a laser measurement system the alignment work is properly done when necessary. The investment is quickly returned through fewer production stoppages and more even quality in the sawn timber. It can be used equally well for circular saws and band saws.

Benefits of using Easy-Laser® E980 are:

- Higher production speed
- Less unplanned downtime
- Better product quality
- Longer lifetime for blades
- Longer lifetime for bearings
- Less vibration
- Less waste material

There is a standard system configuration plus some useful accessories. Together with our Easy-Laser representative, the system is adapted to best fit your actual machinery.

Please note that the application picture show older design of index table.

A complete system contains:

12-0418	1	Display unit E51
12-0168	1	Laser transmitter D23
12-0509	1	Detector E5
12-1336	1	Wireless unit
03-0833	2	Electronic target
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-1133	1	Magnet base with turnable head
12-0013	1	Magnet base
12-0016	1	Shaft bracket with chain
12-1008	2	Offset bracket
12-0624	2	Bracket for electronic target
12-1209	1	Rotating detector bracket for rods
12-1210	1	Magnet bracket long, with turnable head
12-1211	1	Magnet bracket short, with turnable head
12-1087	1	Set square bracket for index table
12-1083	1	Index table 90°
12-1161	1	Set of Rods (4x75 mm)
12-0987	2	Set of Rods (4x120 mm)
12-1232	2	Large targets
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB memory stick with documentation
03-0822	1	USB cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set (incl. with 12-0168)
03-1419	2	Screw clamps
12-0495	1	Shoulder strap for Display unit
03-0878	1	Cleaning cloth for optics
12-1007	1	Transportation case, with wheels

Examples of accessories:

12-1010	1	Sliding bracket (for vertical support rolls)
12-0022	1	Laser transmitter D22 (add or exchange the D23)
12-0752	1	Detector E7 (add an extra unit for more measurement possibilities)
12-0060	1	Rods (4x240 mm)
12-1262	1	Detector bracket for centering on wire position
12-0503	1	Bracket (Set square) for transmitter
12-1123	1	Extension for set square 12-1087, 295 mm
12-1124	1	Extension for set square 12-1087, 430 mm
12-1060	1	Extension chain (2x900 mm). For diameters up to 450 mm [12.7"].
12-1053	1	XT190 BTA Digital belt alignment tool
12-1090	1	XT280 Vibrometer
12-1244	1	XT290 Digital precision level

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 29.0 kg [63.9 lbs]
WxHxD: 622x492x310 mm [24.5x19.4x12.2"]



Easy-Laser® E970 Parallelism

Part No: 12-0853

For parallelism measurement

For parallelism measurement of rolls and other objects in numerous applications. This system use the traditional method where the laser beam (reference) is pointed alongside the machine, and then deflected 90° towards the detector on the measurement object by a penta prism. Measurement values for the horizontal position are registered in both ends of the object. The included precision level is used for the vertical position. Any chosen object or the baseline can be used as a reference. For rolls with diameter 40 mm [1.6"] and larger. Maximum measurement distance with a standard system is 80 metres [260 feet] (40 metres in each direction from the transmitter).

Easy-Laser® E970 is a very versatile system. You can also use it to measure level, straightness and flatness on wire sections (suction boxes), flatness on bases and straightness on rolls. With a few accessories you can also perform shaft alignment. This makes Easy-Laser® a very cost effective solution for your maintenance department.

A complete system contains:

12-0418	1	Display unit E-series E51
12-0022	1	Laser transmitter D22 incl. tilt table
12-0752	1	Detector E7
12-1336	1	Wireless unit for E7
12-0846	1	E290 Digital Precision Level
12-0901	1	Extension Kit for E290
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-1136	1	Angular prism (incl. laser alignment target)
01-2232	1	Tripod adaptor for Angular prism
12-0269	2	Tripod
12-0203	1	Parallelity kit
12-0060	1	Set of Rods 4x240 mm
12-0987	1	Set of Rods 4x120 mm
12-0059	1	Set of Rods 4x60 mm
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB memory stick with documentation
03-0822	1	USB cable
03-1243	1	Battery charger (100–240 V AC)
12-0989	1	DC charging cable
12-0751	1	DC to USB adapter
03-0967	1	Hexagon wrench set
12-0495	1	Shoulder strap for Display unit
03-0878	1	Cleaning cloth for optics
12-0869	1	Carrying case

Examples of accessories:

12-1053	1	XT190 BTA
12-0856	1	Roll alignment Kit
12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
12-0269	1	Tripod
03-1406	1	Safety strap Bahco 3875-LY2

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 19.5 kg [43.0 lbs]
WxHxD: 620x490x220 mm [24.4x19.3x8.7"]

Tripod:

Weight: 7.9 kg [17.4 lbs]
Transport length: 1110 mm [44"]



Easy-Laser® E960-A Turbine alignment

Part No: 12-0710

Reliability and precision


Easy-Laser® E960-A has a measuring probe with a stroke of 10 mm (Short stroke). The slidable tube makes it possible to measure several positions in a row without moving the bracket. Suitable for gas turbines and smaller steam turbines. Makes the measurement and adjustment work of diaphragms and bearings easier thanks to the wireless detector unit and measurement programs that guides you through the measurement process. All of the parts included in the systems are designed and built for even the most demanding workplace and for easy setup on any machinery. The versatile design solves the straightness measurement problems quickly and with precision for any kind of application. Objects up to 40 m [132 feet] can be measured. The detector reads measurement values with a resolution of 0.001 mm [0.05 mils]. Measures diameters 150–1700 mm [5.9–67"].

Versatile programs

The straightness programs of system E960 are very versatile, and let you work in the way that suits every job best. You can add, remove and re-measure measurement points at any time during the measurement. Up to 999 points can be handled by the program. You can include both full bores and half bores in any possible combination in one measurement, the program will calculate the correct centre line in all cases. The measurement program includes many different methods for straightness measurement: 1-point measurement, 4-point measurement, Multipoint measurement (also ovality measurement), 3-point measurement, 3-point measurement with arbitrary angles. Optionally a reference detector can be used to monitor the laser transmitter position at long distances.

The measurement result

Thanks to the large colour display with clear graphs and measurement data you can evaluate the result directly on site. Any point can be set as reference and you can set an offset to which the centre line will be recalculated. You can also calculate waviness (short and long) and best-fit for the points. If you want, the result can also be checked against a tolerance value. The measurement system takes care of all these complicated calculations for you.

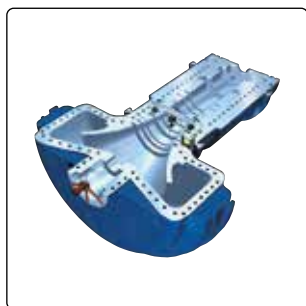

A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0385	1	Laser transmitter bracket
12-0661	1	Offset hub for Laser transmitter
12-0438	1	Detector bracket Short stroke
12-0443	2	Centering target
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0878	1	Cleaning cloth for optics
12-0724	1	Carrying case with wheels



Examples of accessories:

12-0805	1	Measuring probe ruby, diameter 5 mm
12-0801	1	Measuring probe ruby, diameter 2.5 mm
12-1047	1	Measuring probe cylindrical
12-1048	1	Measuring probe cylindrical, with magnet
12-0707	1	Offset hub arm kit for diameters 100–500 mm
12-0752	1	E7 (as reference detector)
12-0434	1	Measuring unit M
12-0433	1	Measuring unit S
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22
12-0706	1	Laser transmitter D25

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 30.3 kg [66.8 lbs]
WxHxD: 1260x550x220 mm [4.6x21.6x8.7"]

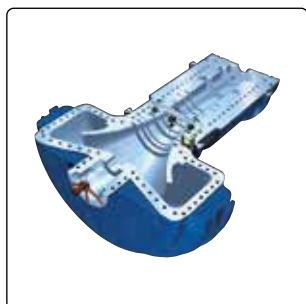

Easy-Laser® E960-B Turbine alignment

Part No: 12-0711

Reliability and precision

Easy-Laser® E960-B has a measuring probe with a stroke of 60 mm (Long stroke). Suitable for larger turbines. The system makes the measurement and adjustment work of diaphragms and bearings easier thanks to the wireless detector unit and measurement programs that guides you through the measurement process. All of the parts included in the systems are designed and built for even the most demanding workplace and for easy setup on any machinery. The versatile design solves the straightness measurement problems quickly and with precision for any kind of application. Objects up to 40 m [132 feet] can be measured. The detector reads measurement values with a resolution of 0.001 mm [0.05 mils]. Measures diameters 200–1700 mm [7.8–67"] as standard, and up to 4000 mm [157"] with accessory brackets.

Versatile programs

The straightness programs of system E960 are very versatile, and let you work in the way that suits every job best. You can add, remove and re-measure measurement points at any time during the measurement. Up to 999 points can be handled by the program. You can include both full bores and half bores in any possible combination in one measurement, the program will calculate the correct centre line in all cases. The measurement program includes many different methods for straightness measurement: 1-point measurement, 4-point measurement, Multipoint measurement (also ovality measurement), 3-point measurement, 3-point measurement with arbitrary angles. Optionally a reference detector can be used to monitor the laser transmitter position at long distances.

The measurement result

Thanks to the large colour display with clear graphs and measurement data you can evaluate the result directly on site. Any point can be set as reference and you can set an offset to which the centre line will be recalculated. You can also calculate waviness (short and long) and best-fit for the points. If you want, the result can also be checked against a tolerance value. The measurement system takes care of all these complicated calculations for you.

A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0385	1	Laser transmitter bracket
12-0661	1	Offset hub for Laser transmitter
12-0715	1	Detector bracket Long stroke
12-0443	2	Centering target
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0878	1	Cleaning cloth for optics
12-0724	1	Carrying case with wheels

Examples of accessories:

12-0805	1	Measuring probe ruby, diameter 5 mm
12-0801	1	Measuring probe ruby, diameter 2.5 mm
12-1047	1	Measuring probe cylindrical
12-1048	1	Measuring probe cylindrical, with magnet
12-0707	1	Offset hub arm kit for diameters 100–500 mm
12-0752	1	E7 (as reference detector)
12-0434	1	Measuring unit M
12-0433	1	Measuring unit S
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22
12-0706	1	Laser transmitter D25

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 31.5 kg [69.4 lbs]
WxHxD: 1260x550x220 mm [4.6x21.6x8.7"]



Easy-Laser® E950-A Bore alignment

Part No: 12-0676

Bore alignment with the highest reliability and precision

Easy-Laser® E950-A is primarily designed for diesel engines (for example crank and camshaft bearings), gearboxes, compressors and similar applications. Positioning workpieces in machine tools is also an appropriate application.

Easy-Laser® E950 makes checking and aligning bearings and bearing journals easier thanks to wireless detectors and versatile brackets. A large colour display with clear graphics and software that guides the user through the entire measurement process contributes to simple operation. The system automatically calculates the bearing journals positions in relation to each other, both horizontally and vertically. You can then evaluate the results directly on-site with different calculation methods such as Best fit around zero and Waviness. It is also possible to analyse the different choices of reference points and set the offset and tolerance values.

A great feature is the check of ovality, for example, to analyse the wear rate. The measurement system takes care of all these complicated calculations for you. You measure and align both full and half bearing journals with equal simplicity. The wireless detector eliminates uncertain factors such as cable pull. All parts are designed for maximum accuracy and stability, and measure with a resolution of 0.001 mm [0.05 mils]. Measurement distance up to 40 m [130 feet]. Easy-Laser® E950 is suitable for use both in production and out in the field.

Also straightness of shafts and coupling alignment

With the systems, you can also measure the straightness of shafts, foundations, etc. without any additional accessories. With the measuring devices for shaft alignment (accessories), you have the most complete measurement system to align the entire drive train on the market. Programs for all types of measurements are included as standard, you then adapt the measurement system with brackets and detectors for your needs now and in the future.



A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0661	1	Offset hub for Laser transmitter
12-0384	1	Set of offset hub arms for diameters 100–500 mm
12-0154	1	Set of magnets for offset hub arms
12-0990	1	Adjustable magnet for offset hub arms
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
12-0588	1	Large target E-series
12-0013	1	Magnet base
12-0059	1	Set of rods (4x60 mm)
01-0938	2	Rods 30 mm
01-0873	4	Rods 120 mm
01-0044	2	Rods 240 mm
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0684	1	Carrying case Linebore A


Examples of accessories:

12-0434	1	Measuring unit M
12-0433	1	Measuring unit S
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0580	1	Axial extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 14.0 kg [30.8 lbs], WxHxD: 550x450x210 mm [21.6x17.7x8.3"]



Easy-Laser® E950-B Bore alignment

Part No: 12-0677

Bore alignment with the highest reliability and precision


Easy-Laser® E950-B is primarily designed for propeller shaft installations on ships with stern tubes, support bearings, gearboxes and engines.

Easy-Laser® E950 makes checking and aligning bearings and bearing journals easier thanks to wireless detectors and versatile brackets. A large colour display with clear graphics and software that guides the user through the entire measurement process contributes to simple operation. The system automatically calculates the bearing journals positions in relation to each other, both horizontally and vertically. You can then evaluate the results directly on-site with different calculation methods such as Best fit around zero and Waviness. It is also possible to analyse the different choices of reference points and set the offset and tolerance values.

A great feature is the check of ovality, for example, to analyse the wear rate. The measurement system takes care of all these complicated calculations for you. You measure and align both full and half bearing journals with equal simplicity. The wireless detector eliminates uncertain factors such as cable pull. All parts are designed for maximum accuracy and stability, and measure with a resolution of 0.001 mm [0.05 mils]. Measurement distance up to 40 m [130 feet]. The included aluminium beams for the laser transmitter bracket are 1100 mm [43.31"] (main beam) and 500 mm [19.86"] (vertical support beam). Easy-Laser® E950 is suitable for use both in production and out in the field.

Also straightness of shafts and coupling alignment

With the systems, you can also measure the straightness of shafts, foundations, etc. without any additional accessories. With the measuring devices for shaft alignment (accessories), you have the most complete measurement system to align the entire drive train on the market. Programs for all types of measurements are included as standard, you then adapt the measurement system with brackets and detectors for your needs now and in the future.

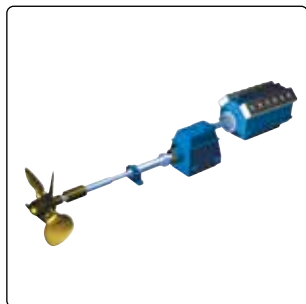

A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0661	1	Offset hub for Laser transmitter
12-0385	1	Laser transmitter bracket for sterntube
12-0341	1	Self centering detector bracket for Ø300–1200 mm
12-0588	1	Large target E-series
12-0013	1	Magnet base
12-0059	1	Set of rods (4x60 mm)
01-0938	2	Rods 30 mm
01-0873	4	Rods 120 mm
01-0044	2	Rods 240 mm
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0685	1	Carrying case Linebore B

Examples of accessories:

12-0434	1	Measuring unit M
12-0433	1	Measuring unit S
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
03-0769	1	Aluminium extension beam L=500 mm
03-0770	1	Aluminium extension beam L=600 mm
03-0771	1	Aluminium extension beam L=1100 mm

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 32.0 kg [70.5 lbs]

WxHxD: 1260x550x220 mm [4.6x21.6x8.7"]



Easy-Laser® E950-C Bore alignment

Part No: 12-0772

Bore alignment with the highest reliability and precision

Easy-Laser® E950-C is primarily designed for diesel engines, compressors, gearboxes and similar applications. This system is much like the E950-A, but has for example instead the round detector E9. One of the brackets has a width of 25 mm [0.99"] to fit in narrow bearing journals. Measures bores diameter 80–500 mm [3.15–19.68"] as standard, and down to 50 mm [2.00"] with customized brackets.

Easy-Laser® E950 makes checking and aligning bearings and bearing journals easier thanks to wireless detectors and versatile brackets. A large colour display with clear graphics and software that guides the user through the entire measurement process contributes to simple operation. The system automatically calculates the bearing journals positions in relation to each other, both horizontally and vertically. You can then evaluate the results directly on-site with different calculation methods such as Best fit around zero and Waviness. It is also possible to analyse the different choices of reference points and set the offset and tolerance values.

A great feature is the check of ovality, for example, to analyse the wear rate. The measurement system takes care of all these complicated calculations for you. You measure and align both full and half bearing journals with equal simplicity. The wireless detector eliminates uncertain factors such as cable pull. All parts are designed for maximum accuracy and stability, and measure with a resolution of 0.001 mm [0.05 mils]. Measurement distance up to 40 m [130 feet]. Easy-Laser® E950 is suitable for use both in production and out in the field.

Also straightness of shafts and coupling alignment

With the systems, you can also measure the straightness of shafts, foundations, etc. without any additional accessories. With the measuring devices for shaft alignment (accessories), you have the most complete measurement system to align the entire drive train on the market. With additional accessories extruder machines can also be measured. Programs for all types of measurements are included as standard, you then adapt the measurement system with brackets and detectors for your needs now and in the future.



A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0759	1	Detector E9, 2-axis
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0661	1	Offset hub for Laser transmitter
12-0384	1	Set of offset hub arms for diameters 100–500 mm
12-0154	1	Set of magnets for offset hub arms
12-0990	1	Adjustable magnet for offset hub arms
12-0768	1	Slide bracket, Width 25 mm, Min. Ø80 mm
12-0767	1	Rod adapter with built in target
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
12-0013	1	Magnet base
12-0059	1	Set of rods (4x60 mm)
01-0938	2	Rods 30 mm
01-0873	4	Rods 120 mm
01-0044	2	Rods 240 mm
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0782	1	Carrying case


Examples of accessories:

12-0553	1	Bore bracket adapter plate
12-0314	1	Detector arms Linebore
12-0752	1	Detector E7 reference detector
12-1336	1	Wireless unit
01-0777	1	Tube adapters (manufactured on request to specified diameter)
12-0792	1	Set of extension rods for Tube measurements
12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0580	1	Axial extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 14.3 kg [31.5 lbs]
WxHxD: 550x450x210 mm [21.6x17.7x8.3"]



Easy-Laser® E950-D Bore alignment

Part No: 12-0954

Bore alignment with the highest reliability and precision

Easy-Laser® E950-D is primarily designed for propeller shaft installations on ships with stern tubes, support bearings, gearboxes and engines.

Easy-Laser® E950 makes checking and aligning bearings and bearing journals easier thanks to wireless detectors and versatile brackets. A large colour display with clear graphics and software that guides the user through the entire measurement process contributes to simple operation. The system automatically calculates the bearing journals positions in relation to each other, both horizontally and vertically. You can then evaluate the results directly on-site with different calculation methods such as Best fit around zero and Waviness. It is also possible to analyse the different choices of reference points and set the offset and tolerance values.

A great feature is the check of ovality, for example, to analyse the wear rate. The measurement system takes care of all these complicated calculations for you. You measure and align both full and half bearing journals with equal simplicity. The wireless detector eliminates uncertain factors such as cable pull. All parts are designed for maximum accuracy and stability, and measure with a resolution of 0.001 mm [0.05 mils]. Measurement distance up to 40 m [130 feet]. Easy-Laser® E950 is suitable for use both in production and out in the field.

Also straightness of shafts and coupling alignment

With the systems, you can also measure the straightness of shafts, foundations, etc. without any additional accessories. With the measuring devices for shaft alignment (accessories), you have the most complete measurement system to align the entire drive train on the market. Programs for all types of measurements are included as standard, you then adapt the measurement system with brackets and detectors for your needs now and in the future.

A complete system contains:

12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0661	1	Offset hub for Laser transmitter
12-0707	1	Arm kit with magnets
12-0990	1	Adjustable magnet for offset hub arms
12-0282	1	Extension arms Linebore
12-0341	1	Self centering detector bracket for Ø300–1200 mm
12-0588	1	Large target E-series
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0792	1	Toolbox
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0986	1	Carrying case Linebore D

Examples of accessories:

12-0823	1	E30 Long Range laser
12-0434	1	Measuring unit M
12-0433	1	Measuring unit S
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0187	1	Magnetic bracket for D75
12-0282	1	Set of extension arms
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0022	1	Laser transmitter D22
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 18.3 kg [40.3 lbs]

WxHxD: 550x450x210 mm [21.6x17.7x8.3"]



Easy-Laser® E930 Extruder alignment

Part No: 12-0788

For aligning extrusion machines

Easy-Laser® E930 is designed to measure straightness and pointing direction, primarily on extruder barrels. Another application can be hydraulic pipes for example. With the system, barrels with diameters from 50 mm to 250 mm can be measured. The actual measurable length depends on the diameter and type of barrel, therefore always consult your Easy-Laser representative for further discussions. The transmitter's laser beam can be compared to an absolutely straight and weightless ruler, that is to say a perfect starting point for precision measurement.

During the alignment procedure both detector and spindle are rotated, thus self calibrating the system. This way you can determine how the centre line of the spindle is, relative to the tube's centre at the inlet end.




Document your measurement results

The detector's measurement value is transferred to the display unit wirelessly, which means that you can measure more freely. The measurement system has programs that guide you step-by-step, using clear graphics on a large 5.7" colour screen. You can also produce full documentation for your measurement job, with direct generation of PDF reports, and database programs for PC for example.

Complete system with all the measuring programs

Easy-Laser® E930 is a complete system in itself, with laser transmitter, detector and display unit. You can also add other parts from our extensive range to build a system that suits your specific needs and requirements, because all the measurement programs are included as standard. For example add shaft alignment equipment for other rotating machines, and lasers for flatness measurement.

- A. Detector with tube brackets mounted
- B. The brackets are manufactured on order to specified diameter
- C. Special brackets with metal points available on request.
- D. Tube adapters for fluted barrels is an option, not included.

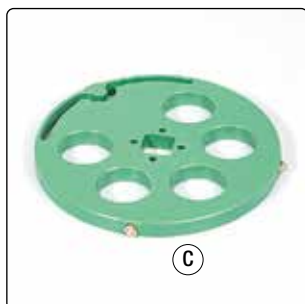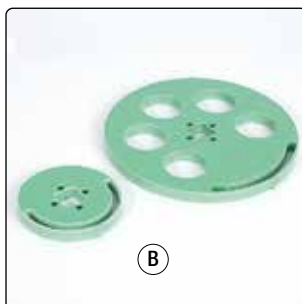

A complete system contains:


12-0418	1	Display unit E-series E51
12-0075	1	Laser transmitter D75
12-0759	1	Detector E9
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0187	1	Bracket for D75 with magnets
01-0777	(1)	Set of brackets for detector (Single barrel)
01-2222	(1)	Set of brackets for detector (Dual barrel)
12-0792	1	Set of extension rods for detector (6.3 m)
12-0810	1	Target for extruder
12-0495	1	Shoulder strap for Display unit
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0811	1	Carrying case

Examples of accessories:

12-1270	1	Tube adapters for fluted barrels
12-0767	1	Rod adapter with built in target
12-0022	1	Laser transmitter D22
12-0436	1	Wireless unit
12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
12-0013	1	Magnet base
12-1147	1	Magnetic bracket
12-1012	1	Thin shaft bracket
12-1010	1	Sliding bracket
01-1165	1	Offset bracket
12-1151	1	Cardan bracket
12-0553	1	Bore bracket adapter plate
12-0314	1	Detector arms Linebore
12-0597	1	Splitter box
03-1004	1	Thermal printer

Note: always check number of items included for each Part No. before ordering.

(1)=Included depending on customer choice.



Easy-Laser® E920 Geometric

Part No: 12-0771



Measurement system for all types of geometric measurement

This system can be used to carry out all the most common geometric measurements; straightness, flatness, squareness, plumb and level. Measurement is quick and precise. Displayed resolution is 0.001 mm [0.05 mils]. The laser transmitter is our well known big seller, the D22 with levelling table, strong magnetic feet, and a range of up to 40 m. The transmitter's laser beam can be compared to an absolutely straight and weightless ruler, that is to say a perfect starting point for precision measurement. The swivelling laser head gives a laser plane parallel to the measured object and can also angle the laser beam 90° to the sweep for squareness measurement.

The display unit has a large and clear 5.7" colour screen. The programs guide you step-by-step through the measuring process, which makes it easy even for inexperienced users. The system can provide full documentation, with direct generation of PDF reports, and database programs for PC for example. The detector transfers the measurement data to the display unit wirelessly, or by cable if required. The advantages of wireless are especially clear on mechanical constructions and objects where cables can snag or get in the way.

The most common method is to fix the laser transmitter to the measurement object using the mounting magnets, or mounting it on a tripod (accessory) to one side. A pin is also provided to secure the laser transmitter to a machine spindle or equivalent, to check straightness and spindle alignment for example.

Easy-Laser® E920 is a complete system in itself, with laser transmitter, detector and display unit. But it is also an excellent starting point for creating a measurement system that suits your specific needs and requirements, because all the measurement programs are included as standard! Add extra laser transmitters, measuring units and brackets as well as other accessories from the wide Easy-Laser® range. Now or in the future.

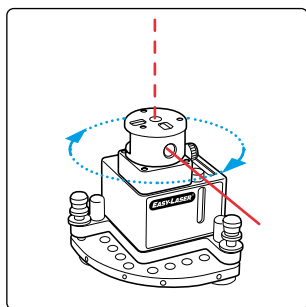

A complete system contains:

12-0418	1	Display unit E51
12-0022	1	Laser transmitter D22 incl. tilt table
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
01-1333	1	Machine/magnet base pin for D22
12-0045	1	Magnet base with turnable head
12-0544	2	Targets for rough alignment
01-1165	1	Offset bracket
01-0043	6	Rods 60 mm
01-0873	6	Rods 120 mm
05-0685	1	Manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB memory stick with documentation
03-0822	1	USB cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
12-0495	1	Shoulder strap for Display unit
03-0878	1	Cleaning cloth for optics
12-0781	1	Carrying case

Examples of accessories:

12-0759	1	Detector E9, 2-axis
12-1053	1	XT190 BTA
12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
12-0269	1	Tripod
12-1136	1	Angular prism
01-2232	1	Tripod adaptor for Angular prism
03-1406	1	Safety strap Bahco 3875-LY2

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 12.3 kg [27.1 lbs]

WxHxD: 550x450x210 mm [21.6x17.7x8.3"]



Easy-Laser® E915 Flange Spin

Part No: 12-0526




Measure flatness easily with spinning laser

This system is mainly for wind turbine tower producers who want to measure flatness of flanges. Similar applications can be e.g. slewing bearings. You can see the result as a true 3D image in the display unit directly after measuring. Then evaluate the result easily with different calculation settings, for example three point reference, best fit or all positive. This can also be done directly on site without having to stop to go to a PC with separate analysis programs, which was the case previously. This makes production much more efficient.

The system includes laser transmitter D23 Spin with power rotating head. This is how it works in brief: The laser beam from the transmitter rotates constantly and creates a reference plane over the entire measurement object. Measurements are performed quicker as you do not have to align the beam for each new measurement position. You place the detector at the desired measurement points and register the reading by a push of a button. In principle, one person can perform the measurement themselves. It is then possible to generate a PDF report containing graphs and measurement data directly from the measurement system's display unit. All information about the measurement object is documented.

Includes the sectional measurement flatness program*. A tower section with diameter over 4 meters represents a significant weight. This weight causes the flanges to deform when the sections are manufactured. With sectional measurement program the flatness is measured in four sections which are mathematically merged into a full circle, which solves this measurement problem. The program also makes it possible to perform the complete measurement on ground. No climbing on ladders or skylift is therefore required. With traditional methods the operator has to work on hazardous high levels, and often more men are needed.

**The sectional measurement flatness program is patented in Sweden, Germany, China and USA.*

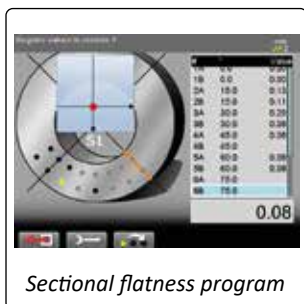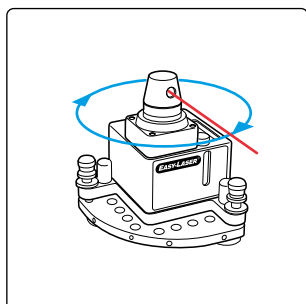

Sectional flatness program

A complete system contains:

12-0418	1	Display unit E-series E51
12-0168	1	Laser transmitter D23 incl. tilt table
12-0509	1	Detector E5
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0321	1	Cable support
12-0544	3	Targets for rough alignment
12-0045	1	Magnet base with turnable head
01-0043	6	Rods 60 mm
01-0873	6	Rods 120 mm
12-0495	1	Shoulder strap for Display unit
05-0400	1	Manual (Note: Refers to English manual)
05-0545	1	Quick manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0781	1	Carrying case




Examples of accessories:

12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
03-1406	1	Safety strap Bahco 3875-LY2

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 12.1 kg [26.7 lbs]
WxHxD: 550x450x210 mm [21.6x17.7x8.3"]

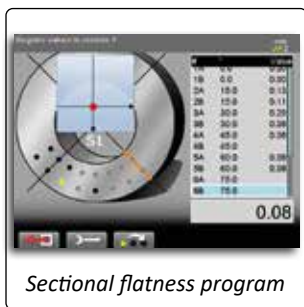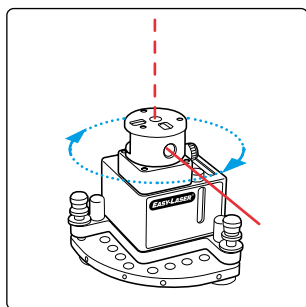

Sectional flatness program

Easy-Laser® E910 Flange

Part No: 12-0525

Measurement system for flange measurements

This system is mainly for wind turbine tower producers who want to measure flatness and parallelism of flanges. Similar applications can be e.g. slewing bearings. You can see the result as a true 3D image in the display unit directly after measuring. Then evaluate the result easily with different calculation settings, for example three point reference, best fit or all positive. This can also be done directly on site without having to stop to go to a PC with separate analysis programs, which was the case previously. This makes production much more efficient.

The system includes laser transmitter D22 with manual rotatable head, and with the option of deflecting the laser beam 90°. With a few more accessories the system can also be used to check the parallelism of the two tower flanges. In the measurement system's display unit it is possible to generate a PDF report containing graphs and measurement data. All information about the measurement object is documented.

Includes the sectional measurement flatness program*. A tower section with diameter over 4 meters represents a significant weight. This weight causes the flanges to deform when the sections are manufactured. With sectional measurement program the flatness is measured in four sections which are mathematically merged into a full circle, which solves this measurement problem. The program also makes it possible to perform the complete measurement on ground. No climbing on ladders or skylift is therefore required. With traditional methods the operator has to work on hazardous high levels, and often more men are needed.

**The sectional measurement flatness program is patented in Sweden, Germany, China and USA.*

A complete system contains:

12-0418	1	Display unit E-series E51
12-0022	1	Laser transmitter D22 incl. tilt table
12-0752	1	Detector E7
12-1336	1	Wireless unit
12-0074	1	Cable 2 m
12-0108	1	Cable 5 m, extension
12-0321	1	Cable support
12-0544	3	Targets for rough alignment
12-0045	1	Magnet base with turnable head
01-0043	6	Rods 60 mm
01-0873	6	Rods 120 mm
12-0495	1	Shoulder strap for Display unit
05-0400	1	Manual (Note: Refers to English manual)
05-0545	1	Quick manual (Note: Refers to English manual)
03-0842	1	Measuring tape 5 m
03-0914	1	USB Memory stick with documentation
03-0822	1	USB Cable
03-1243	1	Battery charger (100–240 V AC)
03-0967	1	Hexagon wrench set
03-0878	1	Cleaning cloth for optics
12-0781	1	Carrying case

Examples of accessories:


12-0434	1	Measuring unit EM
12-0433	1	Measuring unit ES
12-0016	1	V-bracket with chain
01-1165	1	Offset bracket
12-0597	1	Splitter box
03-1004	1	Thermal printer
12-0455	1	Slide bracket Small
12-0543	1	Slide bracket Medium
12-0510	1	Slide bracket Large
12-0269	1	Tripod
12-1136	1	Angular prism
01-2232	1	Tripod adaptor for Angular prism
03-1406	1	Safety strap Bahco 3875-LY2

Note: always check number of items included for each Part No. before ordering.

Complete system:

Weight: 12.1 kg [26.7 lbs]
WxHxD: 550x450x210 mm [21.6x17.7x8.3"]

The most user-friendly precision laser transmitters ever designed!

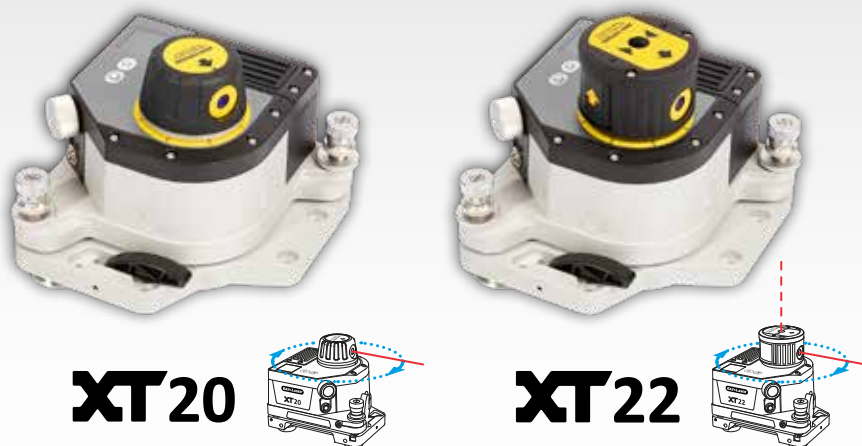


Two models are available

Both transmitters can be used for flatness and straightness measurement. In addition, the XT22 can direct the laser beam at 90 degrees to the laser plane, which means you can solve virtually all types of geometric measurement jobs. The XT22 also has a higher technical specification for straightness thanks to fiber laser technology, and can take measurements at distances up to 40 m. The XT20 can take measurements at distances up to 20 m, but is also IP55 rated water and dust proof. Find out more in the technical specifications section at the end of this catalogue.

New technology improves reliability

We have installed electronic precision vials in the XT transmitters. This gives the advantage of faster feedback when levelling and less risk of errors during calibration, because all users see the same angular value (compared with reading spirit levels). The laser transmitters are wirelessly connected to the XT Alignment app. In this way, the user can be guided during calibration and the measurement procedure. In the event of temperature changes, vibrations or impacts that can affect the measurement result negatively, the app gives a warning during measurement. Data about the transmitter and measurement environment can be downloaded together with the report. This all provides greater reliability and traceability for your measurement jobs.




Functions for easier use

The rotating head is completely stable and retains its position during measurement. At the same time, it is easy to set the pointing direction of the laser beam to hit the detector, even at distances up to 40 m. We guarantee that this will be very much appreciated by users out in the field. All operation is also managed without the need to lock/unlock rotation, which facilitates use considerably.

Just like Easy-Laser's previous laser transmitter, the new XT20/XT22 can be mounted and positioned in many different ways: with integrated super magnets, on rods to be height adjustable, on stands and magnetic feet etc. We know that this is an important factor in practice to combat all those situations the user faces in reality.

Developed for use with the XT Alignment app

The XT20 and XT22 are used with the Value, Basic Flatness and Straightness programs in the XT Alignment app. The laser transmitters can be purchased separately (as a kit with charger and bracket) but are also included in complete systems, such as the XT770 GEO. The XT70-M device can be used as a detector. They can also be used with E series detectors. Note, however, that the XT Alignment app is required to calibrate the electronic precision vials, and other things in the design of the XT transmitters differ from previous products. They can therefore not be exchanged straight off. Ask your local distributor before purchase.

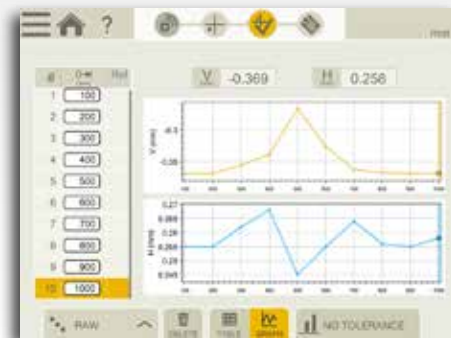

The Straightness program.



The program for basic flatness.


























Calibrating the electronic precision levels is super easy with the step-by-step guidance provided by the software.



The built-in sensors warns on the display on events which can affect the measurement reliability.


E











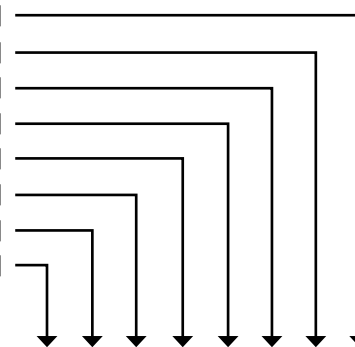










| E980 | E970 | E960 | E950 | E930 | E920 |
 | E710 |
 | E915 | E910 |

	HORIZONTAL 9-12-3		●
	SOFT FOOT		●
	EASYTURN™		●
	MULTIPOINT HORIZONTAL SHAFT		●
	VERTICAL/FLANGE MOUNTED		●
	CARDAN		●
	MACHINE TRAIN		●
	OFFSET AND ANGLE		●
	VALUES (Digital Dial Indicator)	●	●
	BELT TRANSMISSION ALIGNMENT		●
	STRAIGHTNESS 1-point		●
	STRAIGHTNESS 2-point (Centre of Circle)		●
	STRAIGHTNESS 4-point		●
	STRAIGHTNESS Multipoint		●
	STRAIGHTNESS 3-point (Half circle)		●
	ROUNDNESS/OVALITY MEASUREMENT		●
	SPINDLE DIRECTION		●
	SQUARENESS		●
	FLATNESS		●
	TWIST		●
	FLANGE FLATNESS	●	●
	FLANGE PARALLELISM	●	●
	PARALLELISM		●










XT980	XT70-M	XT22	
XT770	XT70-M/S	XT20	XT22
XT660	XT60-M/S		
XT550	XT50-M/S		
XT440	XT40-M/S		
XT290			
XT280			
XT190			



	HORIZONTAL 9-12-3								
	MACHINE TRAIN (UNLIMITED)								
	MACHINE TRAIN (3 MACHINES/2 COUPLINGS)								
	SOFT FOOT								
	EASYTURN™								
	MULTIPOINT HORIZONTAL SHAFT								
	CONTINUOUS SWEEP HORIZONTAL SHAFT								
	UNCOUPLED SWEEP								
	WIDE LIVE Allows for live adjustment at larger angles, vertically and horizontally separately.								
	360 LIVE Allows for live adjustment at any position, in both directions simultaneously.								
	ADJUSTMENT GUIDE Simulate effects of shimming to decide optimum adjustment. For programs Horizontal and Machine train.								
	VERTICAL/FLANGE MOUNTED								
	CARDAN/OFFSET MOUNTED (NOTE: Requires the Cardan bracket kit.)								
	VALUES (Digital Dial Indicator)								
	LEVEL Part of Values program. (NOTE: The level function requires XT290 Level.)								
	TWIST Check base twist and flatness with the M and S measuring units.								
	BASIC FLATNESS Measure two rows of points, 2 to 8 at each. To be used with separate laser transmitter like the XT20, XT22 or D22.								
	STRAIGHTNESS For use with separate laser transmitter (e.g. XT20/XT22/D22).								
	EASYTREND™ Monitor and record machine movement over time. (NOTE: The EasyTrend™ program requires DM-brackets.)								
	BELT TRANSMISSION ALIGNMENT (NOTE: The Belt alignment program requires XT190 BTA.)								
	VIBRATION MEASUREMENT (NOTE: The Vibration measurement program requires XT280 VIB.)								

35


	XT190	XT280	XT290	XT440	XT550	XT660	XT770	XT980
 ONE FREE APP All measurement programs in one app. Available functionality based on which measuring unit is connected.	●	●	●	●	●	●	●	●
 SHARE FILES Share via email directly from your display unit.	●	●	●	●	●	●	●	●
 BUILT-IN HELP Searchable Users Manual which opens the relevant chapter depending where in the process you are.	●	●	●	●	●	●	●	●
 MULTI-LINGUAL The XT Alignment App is available in multiple languages: en / de / sv / es / pt / ru / ja / ko / zh / it / fr / pl / fi	●	●	●	●	●	●	●	●
 DOT LASER TECHNOLOGY – 2 AXIS							●	●
 DOT LASER TECHNOLOGY – 1 AXIS					●	●		
 LINE LASER TECHNOLOGY	●			●				

Apple, the Apple logo, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.
Android, Google Play, and the Google Play logo are trademarks of Google Inc.

Easy-Laser® Precision Level App for E290



| E290 |

 PRECISION LEVEL Use your iPhone, iPod or iPad as display! With our free app Precision Level for the E290 you can follow the alignment from the place where you adjust the machine, and document your measurement. <i>Note! Does not work with XT290.</i>	●
---	---

EasyLink™ 3.0 PC database program

EASYLINK™ PROGRAM

With EasyLink™ 3.0 you can save and organise all your measurements in one place, produce reports with both data and images and export to your maintenance systems. You can customise what your Excel reports should look like and what data should be visible and where it should be positioned. The program has a clear folder structure, where you drag and drop files from the display unit to the database, or vice versa if you wish to prepare a measurement before going out into the field to take measurements. Create your own structure with folders for manufacturer, department or machine type for example. The database can also be located on a common server and shared with other users. For extra safety you can use EasyLink™ to make backups of what you have saved in the E-series' display unit. You can also simulate adjustments and test corrective actions in the program without any risk of losing the original data. The program is supplied with all our measurement systems, but can also be downloaded by anyone for free.



System requirements: Windows® XP, Vista, 7, 8, 10. For the export function, Excel 2003 or newer must also be installed on the computer. EasyLink™ 3.0 functions with both the D and E series in Easy-Laser®. Not with the XT series.

Export formats: Excel, XML.

Download the program free of charge from www.easylaser.com.



PARTS

| XT |



XT12 Display unit

Part No: 12-1291

Description: Wireless display unit for Generation XT. Rugged design, shock proof, IP66 and IP67. Glove enabled touch screen. Water and dust proof connectors: USB A, USB C, HDMI, Charger.

Note: When ordering this item, Shoulder strap Part No. 12-0997 will automatically be added.

The XT12 is not approved for Ex/ATEX areas. Charger is not included.

| XT |



XT12 Display unit with IR Camera

Part No: 12-1292

Description: Wireless display unit for Generation XT. Rugged design, shock proof, IP66 and IP67. Glove enabled touch screen. Water and dust proof connectors: USB A, USB C, HDMI, Charger.

With built-in thermal camera (IR).

Note: When ordering this item, Shoulder strap Part No. 12-0997 will automatically be added.

The XT12 is not approved for Ex/ATEX areas. Charger is not included.

| XT |



ECOM Tab-Ex® 03 DZ1 – Display unit for Generation XT, Intrinsically safe, EX/ATEX approved

Part No: 12-1327

Description: Wireless display unit for Generation XT, especially the XT50-M/S Ex/ATEX approved shaft alignment measuring units. Rugged design, with glove enabled touch screen.

Note: For Zone 1/21 & DIV1, not mining. Charger is included.

For more detailed information, please see the ecom web site: <https://www.ecom-ex.com>

| E |




Display unit E-series: E51

Part No: 12-0418

Description: Available in different measurement program configurations. Which programs are available depends on in which system the display unit is included. Connectors: USB A, USB B, Easy-Laser® equipment, Charger.

Note: Dust and splash guard for connectors open on picture to the right. The look of the display unit keyboard can vary depending on market. Charger is not included.

| XT | D* | E* |

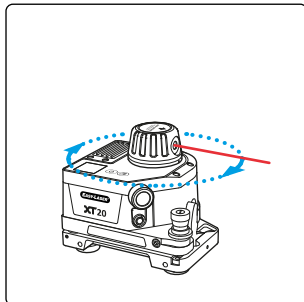

Laser transmitter XT20

Part No: 12-1272 (only transmitter)


Part No: 12-1293 (Kit in case, incl. Multibracket and charger/cables)

Description: Laser transmitter XT20 can be used to measure flatness and straightness. The laser beam can sweep 360° with a measurement distance of up to 20 metres [66'] in radius.

Can also be used with D- and E-series systems, but with limitations. Please also see *Technical specifications* at the end of this catalogue.

Note: The laser beam is used only for a 360° sweep.

| XT | D* | E* |

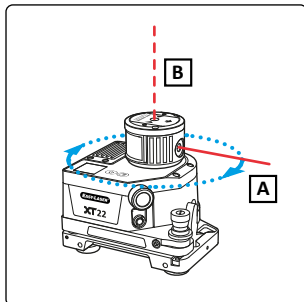

Laser transmitter XT22

Part No: 12-1273 (only transmitter)


Part No: 12-1294 (Kit in case, incl. Multibracket and charger/cables)

Description: Laser transmitter XT22 can be used to measure flatness, straightness, squareness and parallelism. The laser beam can sweep 360° with a measurement distance of up to 40 metres [132'] in radius.

Can also be used with D- and E-series systems, but with limitations. Please also see *Technical specifications* at the end of this catalogue.

Note: Option A. The laser beam is used for a 360° sweep.

Option B. The laser beam is pointed 90° to the sweep.

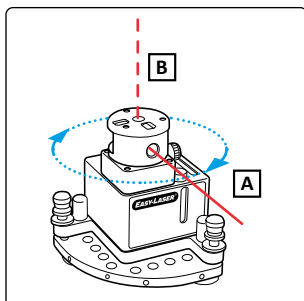


Laser transmitter D22 Swivel

Part No: 12-0022

Description: Laser transmitter D22 can be used to measure flatness, straightness, squareness and parallelism. The laser beam can sweep 360° with a measurement distance of up to 40 metres [130'] in radius. For specifications, please see *Technical specifications* at the end of this catalogue. Tilt table and tool kit included.

Note: Option A. The laser beam is used for a 360° sweep.

Option B. The laser beam is angled at 90° to the sweep.

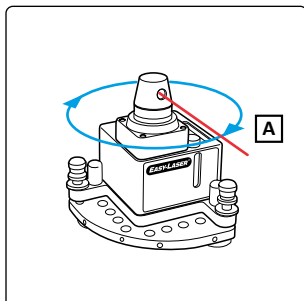

Laser transmitter D23 Spin

Part No: 12-0168

Description: Laser transmitter D23 has a motor driven, rotating head that gives a 360° laser plane. Because the laser beam sweeps across the surface you do not need to align the beam for every detector position. Tilt table and tool kit included.

Measurement distance up to 20 metres [65'] in radius.

Note: A. The laser beam is used for a 360° sweep.



Laser transmitter D75

Part No: 12-0075

Description: For measuring straightness and spindle direction. M6 threads on ends and sides offer alternative mounting options. Measurement distance 40 m [130'].

Note: With tilting screws for laser beam adjustment.



Laser transmitter D25


Part No: 12-0594

Description: For measuring straightness primarily in turbine applications. Measurement distance 40 m [130']. The laser beam can sweep 360°, and can be angled 90° to the sweep.

Note: Battery adaptor included. Brackets, arms and/or offset hub may also be needed, but are not included. See also 12-0706.

Option A. The laser beam is used for a 360° sweep.

Option B. The laser beam is angled at 90° to the sweep.

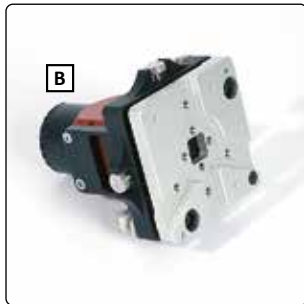

Laser transmitter D25 with offset hub

Part No: 12-0706

Description: For measuring straightness primarily in turbine applications. Measurement distance 40 m [130']. The laser beam can be angled 90° to the sweep, within 0.01 mm/m [0.5 mils/INCH].

Note: Battery adaptor (not pictured) and offset hub included. Brackets/arms may also be needed, but are not included. See also 12-0594.
A. Transmitter mounted to point laser through hub.
B. Transmitter mounted to point laser in opposite direction.



Laser transmitter E30 Long Range

Part No: 12-0823

Description: For measuring straightness on long distances. Measurement distance 100 m [328'] with a 20 mm PSD, >200 m [656'] with 30 mm PSD. M6 threads on front and bottom offer alternative mounting options. Built-in rechargeable battery and Oled display.

Note: Coordinate table or tilt table needed for accurate functionality. No charger or bracketing included (compare with Part No. 12-0858).



Laser transmitter E30 Long Range, with tilt table

Part No: 12-0858

Description: For measuring straightness on long distances. Measurement distance 100 m [328'] with a 20 mm PSD, >200 m [656'] with 30 mm PSD. M6 threads on front and bottom offer alternative mounting options. Built-in rechargeable battery and Oled display.

Note: With tilt table (12-0864), which can be used with magnets or mounted on tripod, Battery charger 100–240 V AC (03-1243), USB memory stick with documentation, and Carrying case (12-0872).



Laser transmitter for sheave alignment systems

Part No: 12-1325

Description: Laser transmitter producing a laser line parallel to the object it is mounted to.

Note: Only transmitter as pictured, no targets included. (Complete system, see Part No. 12-1053 and 12-1332.)

| E |

**Detector E9, 2-axis PSD****Part No:** 12-0759

Description: Detector diameter 45 mm [1.77"]. 2 axis PSD, 20x20 mm [0.79"x0.79"]. Built-in 360° electronic inclinometer. Built-in wireless communication and rechargeable battery. There is also a connector on the back side for standard "red cable" (charging and data transfer). Mounting threads on both ends, for tube adapters (01-0777) or other suitable brackets (e.g. 12-0767 and 12-0553).

Note: Make sure you have a suitable bracket!

| E |

**Detector E7****Part No:** 12-0752

Description: Detector for the E-series. 2 axis PSD, 20x20 mm [0.79"x0.79"]. Built-in 360° electronic inclinometer. Two connectors for making it possible to connect two detectors or more in series. Normally mounted on rods, but has many additional mounting possibilities thanks to threads on two sides.

Note: Optimised for fixed point laser/does not detect a spinning laser.

| E |

**Detector E5****Part No:** 12-0509

Description: Detector for the E-series. 2 axis PSD, 20x20 mm [0.79"x0.79"]. Built-in 360° electronic inclinometer. Two connectors for making it possible to connect two detectors or more in series. Normally mounted on rods, but has many additional mounting possibilities thanks to threads on two sides.

Note: With Dual Detection Technology, making it possible to read both fixed point laser and spinning laser, but is optimised for spinning laser.

| E |

**Detector E3****Part No:** 12-0799

Description: Detector for the E-series. 2 axis PSD, 30x30 mm [1.18"x1.18"]. Built-in wireless communication. Battery status indicator. Built-in 360° electronic inclinometer. One connector on top side. Normally mounted on rods, but also has additional mounting threads on back side.

Note: Target/Dust cover for PSD included. Does not detect a spinning laser.

| E | XT |

**XT & E-series wireless Detector for belt alignment****Part No:** 12-1054

Description: Detector that reads off the sheaves position in two directions (horizontal+vertical) at the same time. With built-in display showing offset and angular values. Note: Laser transmitter also needed.

Note: Also for wireless connection to separate display units E51 and E52 which have the BTA digital program. Or connect it to the XT Alignment App on your iOS/Android display, or Easy-Laser XT12/XT11.

A. Super magnets x 4, for attachment to sheave side.

| E |

**Digital Precision Level E290****Part No:** 12-0846

Description: Digital precision level. Built-in OLED display and rechargeable battery.

Note: For complete kit, see Part No. 12-0857 below.

| E |

**Digital Precision Level E290, complete kit****Part No:** 12-0857**Description:** Digital precision level (12-0846), complete kit with Battery charger 100–240 V AC (03-1243), safety strap (12-0915) and USB memory stick with documentation (03-0914).**Note:** Delivered in plastic case (12-0873).

[E]



Measuring unit EM, dot laser, PSD 20x20 mm

Part No: 12-0434

Description: Laser diode and PSD detector in one housing. Built-in electronic 360° inclinometer. Mainly for shaft alignment. PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with S unit 12-0433. E-series measuring unit.

[E]



Measuring unit ES, dot laser, PSD 20x20 mm

Part No: 12-0433

Description: Laser diode and PSD detector in one housing. Built-in electronic 360° inclinometer. Mainly for shaft alignment. PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with M unit 12-0434. E-series measuring unit.

[XT]



Measuring unit XT40-M, line laser, PSD 30 mm

Part No: 12-0943

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 30 mm [1.18"].

Note: To be used in pair with S unit 12-0944. XT-series measuring unit.

[XT]



Measuring unit XT40-S, line laser, PSD 30 mm

Part No: 12-0944

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 30 mm [1.18"].

Note: To be used in pair with M unit 12-0943. XT-series measuring unit.

[XT]



Measuring unit XT60-M, dot laser, PSD 20x20 mm

Part No: 12-1028

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with S unit 12-1029. XT-series measuring unit.

[XT]



Measuring unit XT60-S, dot laser, PSD 20x20 mm

Part No: 12-1029

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with M unit 12-1028. XT-series measuring unit.

[XT]



Measuring unit XT50-M, EX/ATEX, dot laser, PSD 20x20 mm

Part No: 12-1026

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 20x20 mm [0.79x0.79"].

Note: Intrinsically safe design. To be used in pair with S unit 12-1027. XT-series measuring unit.

[XT]



Measuring unit XT50-S, Ex/ATEX, dot laser, PSD 20x20 mm

Part No: 12-1027

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 1 axis PSD 20x20 mm [0.79x0.79"].

Note: Intrinsically safe design. To be used in pair with M unit 12-1026. XT-series measuring unit.

[XT]



Measuring unit XT70-M, dot laser, PSD 20x20 mm, 2-axis

Part No: 12-1045

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 2 axis PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with S unit 12-1046, or as a separate detector for GEO-programs. XT-series measuring unit.

[XT]



Measuring unit XT70-S, dot laser, PSD 20x20 mm, 2-axis

Part No: 12-1046

Description: Laser diode and PSD detector in one housing. Built-in wireless communication. OLED display shows battery status and angle of the unit on shaft. Built-in electronic 360° inclinometer. For shaft alignment. 2 axis PSD 20x20 mm [0.79x0.79"].

Note: To be used in pair with M unit 12-1045. XT-series measuring unit.

| D | E | XT* |

**Magnet base****Part No:** 12-0013**Description:** Versatile magnet base with On/Off function and many optional rod mounting possibilities. Holding power 800N.**Note:** Three sides are magnetic. *For use with XT-series offset bracket 12-1008 is also needed.

| D | E | XT* |

**Magnet base with turnable head****Part No:** 12-0045**Description:** Versatile magnet base with On/Off function and 360° turnable head with two rod mounting possibilities.**Note:** *For use with XT-series offset bracket 12-1008 is also needed.

| D | E | XT |

**Magnet base with turnable head****Part No:** 12-1133**Description:** Versatile magnet base with On/Off function and 360° turnable head with two rod mounting possibilities, for both C-C40 mm and C-C56 mm. It has a screw and washer with which you can lock the top rotation, and therefore still use it for jobs like shaft alignment.**Note:** -

| D | E |

**Rotating detector bracket for rods****Part No:** 12-0169**Description:** Allows for 360° swivel.**Note:** -

| D | E | XT |

**Rotating detector bracket for rods****Part No:** 12-1209**Description:** Allows for 360° swivel.**Note:** -

| D | E | XT |

**Magnet bracket long, with turnable head****Part No:** 12-1210**Description:** Allows for 360° swivel.**Note:** -

| D | E | XT |

**Magnet bracket short, with turnable head****Part No:** 12-1211**Description:** Allows for 360° swivel.**Note:** -

| D | E | XT |

**Detector bracket for centering on wire position****Part No:** 12-1262**Description:** Mainly for sawmill applications.**Note:** -

| D | E | XT |

**Radial support for magnet base****Part No:** 12-0508**Description:** Can be used for supporting the magnet base in many different ways. Makes it easier to position the detector correctly. Especially useful on flywheels.**Note:** -

| D | E |

**Pointing bracket on magnet base****Part No:** 12-0583**Description:** For wind tower flanges. Makes it possible to measure near the edge of a surface.**Note:** Probe does not touch surface. Rods and detector not included.**Extension for set square
12-1087, 295 mm****Part No:** 12-1123**Description:** Extension plate for set square Part. No. 12-1087.**Note:** -**Extension for set square
12-1087, 430 mm****Part No:** 12-1124**Description:** Extension plate for set square Part. No. 12-1087.**Note:** -**Bracket (Set square) for
transmitter****Part No:** 12-0503**Description:** -**Note:** Mainly for sawmill applications.

| D | E | XT |

**Magnetic brackets and
rods, kit****Part No:** 12-1017**Description:** 2 magnetic brackets and 4pcs rods 120 mm [4.72"] in small case.**Note:** -

| D | E | XT |



Magnetic bracket

Part No: 12-1147

Description: For axial mounting on flanges or shafts. With M6 screws working as radial supports, and four super magnets.

Note1: For rod C-C 40 and 56 mm.

Note2: Older design of bracket on rightmost picture.

| D | E |



V-bracket with chain

Part No: 12-0016

Description: For mounting on shaft or coupling. The V-bracket fits shafts with diameters 20–450 mm [0.8–17.7"]. The standard chain included can be used on shaft diameters up to 150 mm [6"].

Bracket width 18 mm [0.7"].

Note: Extension chains available for shafts larger than diameter 150 mm [6"]. Does not fit the XT series.

| XT |




V-bracket with chain and rods

Part No: 12-0963

Description: For mounting on shaft or coupling. The V-bracket fits shafts with diameters 20–450 mm [0.8–17.7"]. The standard chain included can be used on shaft diameters up to 150 mm [6"]. Chain is pre-mounted. Bracket width 18 mm [0.7"].

Note: Only for XT series. 2 pcs rods 120 mm [4.72"] included. Extension chains available [Part No. 12-1060] for shafts larger than diameter 150 mm [6"].

| XT |




V-bracket with stainless steel chain and rods

Part No: 12-1040

Description: For mounting on shaft or coupling. The V-bracket fits shafts with diameters 20–450 mm [0.8–17.7"]. The standard chain included can be used on shaft diameters up to 150 mm [6"]. Chain is pre-mounted. Bracket width 18 mm [0.7"].

Note: Only for XT series. 2 pcs rods 120 mm [4.72"] included. Extension chains available [Part No. 12-1038] for shafts larger than diameter 150 mm [6"].

| D | E | XT |



Standard chains

Part No: 12-0625

Description: Standard chains for shaft alignment brackets.

Note: 2 pcs. Includes plastic box.

| D | E |



Extension chain, set

Part No: 12-0128

Description: For standard chains. For shaft diameters 150–450 mm [5.9–17.7"].

Note: 2 pcs. included, with plastic box. This one fits best in the system cases for E420 and D-series.

| E | XT |

**Extension chain, set****Part No:** 12-1060**Description:** For standard chains. For shaft diameters 150–450 mm [5.9–17.7"].**Note:** 2 pcs. included, with plastic box. This one fits best in XT and E system cases, except E420.

| XT |

**Extension chain stainless steel, set****Part No:** 12-1038**Description:** For extension of stainless steel chains. For shaft diameters 150–450 mm [5.9–17.7"].**Note:** 2 pcs. included, with plastic box.

| D | E | XT |

**Thin chain bracket****Part No:** 12-1012**Description:** For use for example when the space between coupling and machine is limited. Width: 12 mm [0.5"]. For shaft diameters 20–450 mm [0.8–17.7"].**Note:** Includes thin chain and tightening tool. Photos show old threadings, but are otherwise correct.

| D550 |

**Shaft bracket with chain, stainless steel****Part No:** 12-0337**Description:** Bracket mainly for use with the D550 system which has a rod C–C of 70 mm. Pre-mounted chain and rods. For shaft diameters 20–150 mm [0.8–5.9"].**Note:** -

| D550 |

**Extension chain, stainless steel****Part No:** 12-0363**Description:** For use together with 12-0337. For shaft diameters 150–320 mm [5.9–12.6"]. Two extension chains: –500 mm [–19.6"]**Note:** 1 pc. included. Does not fit with standard chains.

| D | E |

**Offset bracket****Part No:** 01-1165**Description:** Allows axial displacement between measuring units to be able to rotate past projecting machine parts. For both E and D series.**Note:** 2 screws M6x16 also needed (Part No. 03-0045). V-bracket and rods not included.

| D | E | XT |

**Offset bracket****Part No:** 12-1008**Description:** Allows axial displacement between measuring units to be able to rotate past projecting machine parts. Also works as a converter between rod C–C 40 mm (D and E series) and C–C 56 mm (XT series) so older brackets can be used.**Note:** 2 screws M6x16 included.

| XT | E |



DM Bracket, complete set

Part No: 12-1130

Description: For measuring dynamic movements. Includes 2 pcs DM brackets, 4 pcs mounting plates, 2 pcs bolt mounting plates, glue Lock-tite 4070, 4 pcs screw M8x20, hexagon wrench 6 mm, Quick Manual. Delivered in plastic case.

Note: -

| XT | E |



DM Bracket

Part No: 12-1125

Description: For measuring dynamic movements. For complete set, please see Part No. 12-1130 instead.

Note: Measuring unit not included.

| XT | E |



DM Bracket extension

Part No: 12-1129

Description: Extension for bracket 12-1125. For complete set, please see Part No. 12-1130 instead.

Note: Parts included as pictured on leftmost picture.

| D | E | XT |



Sliding bracket

Part No: 12-1010

Description: For shaft alignment. The spherical feet can be placed in two different positions for adaption to small or large shaft diameters. Min./Max. diameters 90–600 mm [3.5–23.6"].

Used when the shafts cannot be rotated. Mounted with standard chains (not included).

Note: Photos show old threadings, but are otherwise correct.

| D | E |



Sliding bracket with magnets

Part No: 12-0303

Description: The spherical feet can be placed in two different positions for adaption to small or large shaft diameters. With attachment magnets. Can also be mounted with standard chains (not included).

Note: -

| D | E |



Sliding bracket with magnets and probe

Part No: 12-0138

Description: For plumb measurement of e.g. generator shafts. The spherical feet can be placed in two different positions for adaption to small or large shaft diameters. With attachment magnets. Can also be mounted with standard chains (not included).

Note: -

| D | E |



Sliding bracket with turnable head

Part No: 12-0137

Description: For roll parallelism measurement. The spherical feet can be placed in two different positions for adaption to small or large roll diameters. With attachment magnets. Can also be mounted with standard chains (not included).

Note: -

| E | XT |



Cardan bracket set

Part No: 12-1151

Description: For alignment of cardan/offset mounted machines. Offset range 0–900 mm.

Note: Delivered in plastic carrying case. For XT- and E-series. Please see rightmost picture for example of attachment for E or XT unit.
Weight: 8 kg [17.6 lbs], WxHxD: 500x380x140 [19.7x15.0x5.5"]

| D | E | XT |



Rod, 30 mm [1.18"]

Part No: 01-0938

Description: Stainless steel. Diameter 10 mm. Extendable.

Note: 1 pcs.

| D | E | XT |



Rods, 60 mm [2.36"]

Part No: 12-0059

Description: Stainless steel. Diameter 10 mm. Extendable. Plastic holder included.

Note: 4 pcs.

| D | E | XT |



Rods, 75 mm [2.95"]

Part No: 12-1161

Description: Stainless steel. Diameter 10 mm. Extendable. Plastic holder included.

Note: 4 pcs.

| D | E | XT |



Rods, 120 mm [4.72"]

Part No: 12-0987

Description: Stainless steel. Diameter 10 mm. Extendable. Plastic holder included.

Note: 4 pcs.

| D | E | XT |



Rods, 120 mm [4.72"]

Part No: 12-0324

Description: Stainless steel. Diameter 10 mm. Extendable. Plastic holder included.

Note: 8 pcs.

| D | E | XT |



Rods, 240 mm [9.44"]

Part No: 12-0060

Description: Stainless steel. Diameter 10 mm. Extendable. Plastic holder included.

Note: 4 pcs.

| D | E |



Tube adapters for detector E9

Part No: 01-0777

Description: Adapters mainly for mounting of detector when used for extruder measurements. For use in single barrels.

Note: Manufactured on request to your specified diameter up to 250 mm [9.84"]. 2 pcs included. Includes items as pictured leftmost. Can also fit on detector D157 (discontinued).

[D | E]




Tube adapters for detector E9, for dual barrels

Part No: 01-2222

Description: Adapters mainly for mounting of detector when used for extruder measurements. These adapters are designed specifically for use in dual barrels.

Note: Manufactured on request to your specified diameter up to 250 mm [9.84"]. 2 pcs included. Includes items as pictured leftmost. Can also fit on detector D157 (discontinued).

[D | E]



Tube adapters for fluted barrels

Part No: 12-1270

Description: Adapters mainly for mounting of detector E9 and used for extruder measurements.

Note: Manufactured on request to your specified diameter up to 250 mm [9.84"]. Included items: 2 pcs adapters, 4 pcs rods 99.9 mm, 8 pcs M5x16 MF6S, 4 pcs M5x16 MC6S, 4 pcs M5x20 MC6S.

[D | E]



Tube adapters with metal points

Part No: -

Description: Adapters mainly for mounting of detector E9 and used for extruder measurements. With metal points of your choice and adapted for your application.

Note: Manufactured on request to your specified diameter up to 250 mm [9.84"]. 2 pcs included. Can also fit on detector D157 (discontinued).

[E | XT]



Extension Kit for precision level for large diameters

Part No: 12-0901

Description: For using the E290 or XT290 Precision Level on diameters 55–800 mm [2.16–31.50"].

Note: Includes 2 legs, 4 magnets and mounting screws.

[E]



Slide bracket Width 25 mm [0.99"]

Part No: 12-0768

Description: Bracket for straightness measurement of bores with a width of down to 25 mm [0.99"]. For bores $\varnothing 80$ – mm [3.15"–]. Magnetic feet holds the bracket safely also upside down. With positioning guide (extended on picture to the right). Guide can be removed.

Note: Designed to fit with rod adapter 12-0767 and detectors E8/E9. If used with other detectors and adapters, it is those which determines the minimum measurable diameter.

[E]



Rod adapter with built in target

Part No: 12-0767

Description: For detector E8/E9. With slidable target. For mounting of the detector on regular rods with 40 mm centre-to-centre distance. Can be used on Slide bracket 12-0768 or any other suitable bracket.

Note: Detector not included.

| D | E | XT |

**Slide bracket Small****Part No:** 12-0455**Description:** For bore straightness measurement. With magnetic feet.**Note:** For information on measurable diameters, please see section *Technical specifications*.

| D | E | XT |

**Slide bracket Medium****Part No:** 12-0543**Description:** For bore straightness measurement. With magnetic feet.**Note:** For information on measurable diameters, please see section *Technical specifications*.

| D | E | XT |

**Slide bracket Large****Part No:** 12-0510**Description:** For bore straightness measurement. With magnetic feet.**Note:** For information on measurable diameters, please see section *Technical specifications*.

| D | E | XT |

**Small magnet base with turnable head****Part No:** 12-0696**Description:** With On/Off function and 360° turnable head. Removable rotation lock screw included.**Note:** Includes 2 rods 75 mm [2.95"].

| D | E |

**Foot set for linebore arms****Part No:** 12-0134**Description:** For use with linebore detector arms. Included in 12-0314.**Note:** -

| D | E |

**Foot set for Ø120–150 mm****Part No:** 12-0143**Description:** For use with linebore detector 12-0032 and bracket 12-0553. Included in 12-0314.**Note:** -

| D | E |

**Bore bracket adapter plate****Part No:** 12-0553**Description:** Bracket for use with detector D5, D157 or E9.**Note:** Detector and arm set not included. Suitable Arm set is Part No. 12-0314. Detector D5 and D157 is discontinued.

| D | E |

**Detector arms Linebore****Part No:** 12-0314**Description:** For bracket 12-0553. For bores Ø120–500 mm [4.72–19.68"], with the possibility to use the longest three arms as extension arms.**Note:** Also includes Foot set 12-0134 and 12-0143 (the rightmost picture).

| D | E |

**Offset hub with counterlock****Part No:** 12-0661**Description:** For laser transmitter 12-0075.**Note:** -

[D | E]

**Offset hub with counterlock and tilt function****Part No:** 12-0537**Description:** For laser transmitter 12-0594.**Note:** -


[E]

**Offset hub with counterlock and tilt function for transmitter E30****Part No:** 12-0828**Description:** For laser transmitter E30, Part No. 12-0823.**Note:** -

[D | E]

**Arm kit with magnets****Part No:** 12-0707**Description:** For offset hub 12-0661 and 12-0537. Arms for bores $\varnothing 100\text{--}500\text{ mm}$ [3.94–19.68"].**Note:** -

[D | E]

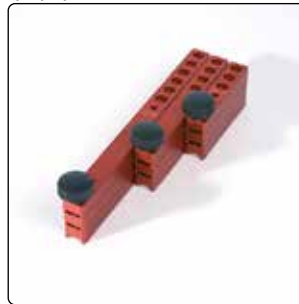**Offset hub arms****Part No:** 12-0384**Description:** For offset hub 12-0661 and 12-0537. For bores $\varnothing 100\text{--}500\text{ mm}$ [3.94–19.68"]. Also includes centering plug.**Note:** -

[D | E]

**Extension arms Linebore****Part No:** 12-0282**Description:** For extension of the Linebore offset hub arms. For bores $\varnothing 500\text{--}1000\text{ mm}$ [19.68–39.36"].**Note:** -

[D | E]

**Magnets for offset hub arms****Part No:** 12-0154**Description:** For arms 12-0384. With plastic holder.**Note:** -

[D | E]

**Adjustable magnet for offset hub arms****Part No:** 12-0990**Description:** To use when the mounting surfaces for the hub arms aren't in same level. Adjustable 0–14mm [0–0.55"] compared to standard magnet level.**Note:** -

[D | E]

**Axial extension arms, Linebore****Part No:** 12-0580**Description:** Used for making it possible to reach the Linebore detector from the same side of the bore as the transmitter.**Note:** 3 arms with magnets etc. as pictured on the left picture.

[D | E]



Laser transmitter bracket Turbine/Bore alignment

Part No: 12-0385

Description: For use with offset hub 12-0661 and laser transmitter D75. Included in system E950-B, E960-A, E960-B. 2 aluminium beams, length 1100 mm and 500 mm.

Note: Transmitter and hub not included.

[D | E]




Rod bracket for laser D75

Part No: 12-0149

Description: For mounting of laser transmitter D75 on standard rods. Laser beam can point from the bracket or through the bracket.

Note: -

[D | E]

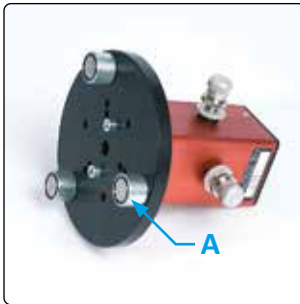


Bracket for laser D75

Part No: 12-0187

Description: To use on shaft ends, flywheels etc. Laser beam can point from the bracket or through the bracket.

Note: A. 3 super magnets.

[XT]




Multi bracket for XT laser transmitters

Part No: 12-1275

Description: For more mounting possibilities of the laser transmitters.

Note: For XT20 and XT22. The set of mounting screws for XT laser-transmitter (Part No. 12-1300) might also be needed if you do not already have it. Please see the *Technical specification* pages for example of use.

[D | E]

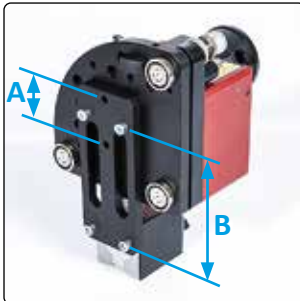

Adapter plate for tilt table to magnet base

Part No: 12-0874

Description: For mounting D22 laser transmitter on a magnet base, or a magnet base with turnable head. Possible to turn unit 90° on bracket (mount in holes A instead).

Note: 4 screws M6x16 also needed (not included).

A: C-C=40 mm

B: C-C=106 mm

[D | E]



Tilt table

Part No: 12-0110

Description: Tilt table mainly for transmitter D26, D22 and D23, but can also be used together with transmitter D75, for example.

Note: Tool kit 12-0622 is *not* included (as before) but instead has to be ordered separately.

| D | E |




Tilt table, turnable

Part No: 12-0864

Description: Tilt table mainly for transmitter E30 Long Range. For fine adjustment of horizontal and vertical angle. Can be used with magnets or mounted on tripod.

Note: -

| D | E |



Tool kit for tilt table

Part No: 12-0622

Description: Tool kit for Tilt table Part No. 12-0110. Safety strap screw (01-1402), Machine/magnet base pin (01-0139), set of Hexagon wrenches, Rod tightening tool (03-0048), Feet with flat points (3 pcs).

Note: Safety strap is separate part. Safety regulations differ from country to country.

| D | E |



Handheld detector bracket

Part No: 12-0603

Description: For use on non-magnetic surfaces.

Note: Use with rods (not included). Includes 2 screws M6x10 and rod tightening tool.

| D | E |



Magnet base pin for D22 and D26, short

Part No: 01-0139

Description: Clamping pin \varnothing 16 mm[0.63"], clamping length 30 mm [1.18"].

Note: This pin is included in the tilt table tool kit.

| D | E | XT |




Magnet base pin for D22/D26/XT20/XT22, Long

Part No: 01-1333

Description: Clamping pin \varnothing 20 mm[0.79"], clamping length 60 mm [2.36"].

Note: Also for laser transmitters XT20/XT22 when used with Multi bracket Part No. 12-1275.

| XT |

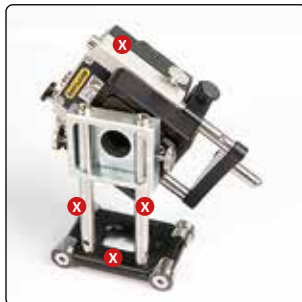


Bracket with rotatable bore probe, XT-series

Part No: 12-1277

Description: For bore measurements. Smallest diameter 220 mm [8.67"] when mounted as pictured. This is just one example of how the bracket can be assembled, and other magnetic or non-magnetic brackets with C-C 56 mm can also be used. The detector unit can be turned, allowing the laser beam to pass through the hole in the bracket and hit the PSD. Includes 2 rods 30 mm and 4 rods 60 mm (not pictured).

Note: Items marked with X is *not* included.

[E]

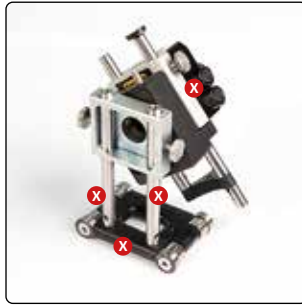

Bracket with rotatable bore probe, E-series

Part No: 12-1282

Description: For bore measurements. Smallest diameter 170 mm [6.70"] when mounted as pictured. This is just one example of how the bracket can be assembled, and other magnetic or non-magnetic brackets with C-C 40 mm can also be used. The detector unit can be turned, allowing the laser beam to pass through the hole in the bracket and hit the PSD. Includes 2 rods 30 mm and 4 rods 60 mm (not pictured).

Note: Items marked with X is *not* included.

[D | E]



Self centering bracket, Linebore

Part No: 12-0341

Description: For sterntube measurement. Smallest diameter 300 mm [11.81"]. Includes extension beams and rods for diameters up to 1200 mm [47.24"].

Note: Includes items as pictured leftmost. No detector included.

[D | E]




Detector bracket "short stroke", Turbine

Part No: 12-0438

Description: With slidable beam. Makes it possible to reach several measurement positions without moving the entire bracket. One aluminium beam 1100 and one 600 mm included. For \varnothing 150–1700mm [5.9"–66.9"].

Note: Detector not included.

[E]



Detector bracket "long stroke", Turbine

Part No: 12-0715

Description: Measures diameters 200–1700 mm [7.8"–67"] as standard. Stroke: 60 mm [2.36"].

Two aluminium beams 1100 mm [43.3"], one 600 mm [23.6"], rods 5x240 mm [9.44"], 4x120 mm [4.72"], 2x60 mm [2.36"], 1x30 mm [1.18"] included. For \varnothing 200–1700mm [7.8"–66.9"].

Note: Detector not included.

[D | E]




Tube bracket

Part No: 12-0814

Description: Included with Part No. 12-0438 and 12-0715.

Note: -

[D | E]



Titanium rods, set of 3

Part No: 12-1019

Description: Very light, titanium rods. Mainly for use with the probe in turbine applications and similar. Diameter 10 mm. Extendable.

Note: 3 lengths included: 1000 mm [39.37"] weight 150 g [5.29 oz], 700 mm [27.56"] weight 110 g [3.88 oz], 400 mm [15.75"] weight 64 g [2.26 oz]

[D | E]



Aluminium beam, 500 mm [19.68"]

Part No: 03-0769

Description: Cross section measures 44x44 mm [1.73x1.73"].

Note: -

[D | E]



Aluminium beam, 600 mm [23.62"]

Part No: 03-0770

Description: Cross section measures 44x44 mm [1.73x1.73"].

Note: -

[D | E]



Aluminium beam, 1100 mm [43.31"]

Part No: 03-0771

Description: Cross section measures 44x44 mm [1.73x1.73"].

Note: -



Connecting strip (with set screws)

Part No: 03-0633

Description: Used to extend the aluminium beams.

Note: 1 pc. It is recommended to use minimum three connecting strips (three sides).

[D | E]



Ball top probe

Part No: 12-0439

Description: Probe for turbine measurement.

Note: -

[D | E]



Short ball top probe

Part No: 12-0490

Description: Probe for turbine measurement.

Note: -

[D | E]



Measuring probe Ruby Ø5 mm

Part No: 12-0805

Description: Probe for turbine measurement. With ruby top.

Note: -

[D | E]



Measuring probe Ruby Ø2.5 mm

Part No: 12-0801

Description: Probe for turbine measurement. With ruby top.

Note: -

[D | E]



Gauge block

Part No: 03-1291

Description: For use mainly in turbine applications. Nominal measure 8 mm [size of block 30x8x9 mm].

Note: -

[D | E]



Measuring probe, cylindrical

Part No: 12-1047

Description: For use in turbine applications.

Note: -

[D | E]



Measuring probe, cylindrical, with magnet

Part No: 12-1048

Description: For use in turbine applications.

Note: With neodym magnet in the cylinder probe.

| D | E |



Centering target, Turbine

Part No: 12-0443

Description: For rough alignment of laser beam. 1 m + 0.5 m extension.

Note: -

| D | E | XT |



Tripod

Part No: 12-0269

Description: For use with Laser transmitter and Angular prism. Min./Max. height 500–2730 mm [19.7–107.5"]

Note: Includes tripod head Part No. 03-1338, with 5/8-11 UNC threads.

| E |



Parallelity kit

Part No: 12-0203

Description: For parallelism measurement of rolls. Includes Magnet base D45, Sliding bracket 12-0137, Sliding table 12-0202, 2 x Large target base line. Delivered in plastic case.

Note: Detector not included.

| D | E | XT |



Sliding table for tripod

Part No: 12-0202

Description: Sliding table to mount on a tripod. For laser transmitters and angular prism. Mounted using 5/8-11 UNC thread .

Allows for 150 mm [5.9"] slide of the unit, for example to point the laser beam to a detector on a rod or flange without moving the tripod.

Note: Also for laser transmitters XT20/XT22 when used with Multi bracket Part No. 12-1275.

| D | E |



Angular prism

Part No: 12-1136

Description: Angular prism with built-in penta prism which deflects the beam 90°. With the rotatable angular prism you can reach a detector at any height on a flange or a roll when measuring parallelity.

Note: Angular prism has a rod C-C of 40 mm. Items as pictured leftmost included (prism, bracket for detector unit, laser transmitter alignment targets). The rightmost picture shows setup with detector, on tripod with sliding table 12-0202, and tripod adaptor 01-2232.

| D | E |



Angular prism, kit

Part No: 12-1221

Description: Angular prism kit in rugged carrying case.

Note: Carrying case plus items as pictured leftmost included (prism, tripod adaptor, bracket for detector unit, laser transmitter alignment targets, magnet base, 4 pcs rods 120 mm [4.72"]). Interior precut to also fit 2 pcs 12-1200 (accessories). Case measures WxHxD: 335x280x140 [13.2x11.0x5.5"], kit weight 3.8 kg [8.4 lbs].

| D | E | XT |



Tripod adaptor for Angular prism

Part No: 01-2232

Description: To be used for mounting of Angular prism on tripod. Preferably on sliding table 12-0202 as pictured.

Note: Item as pictured leftmost included. Can be used for other applications if suitable. Rod C-C 40 and 56 mm.

| D | E |



Sliding table for magnet base

Part No: 12-1200

Description: For precision adjustment, mainly of angular prism. For rod C-C 40 mm. To be mounted on magnet base 12-0013.

Note: Includes 4 pcs screws. Magnet base not included.

| XT |



Sun visor for XT40

Part No: 12-1205

Description: To use in very sunny conditions when light causes unstable values. Fits measuring units XT40-M/S (12-0943/12-0944).

Note: -

| D | E |




Target 100x100 mm

Part No: 12-0544

Description: Rough alignment target for flatness measurement. Adjustable height (to align with either D22 or D23) and magnet base.

| D550 |

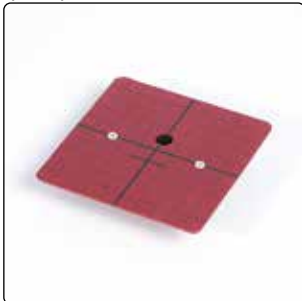


Target D550 cardan

Part No: 12-0402

Description: Large target for use when aligning cardan/offset mounted machines. The target clamps onto the front of the D550 measuring units.

Note: -

| E |

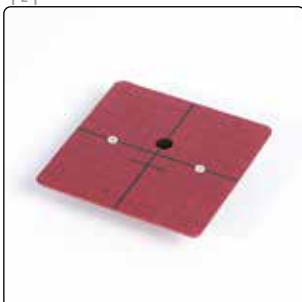

Large target E-series

Part No: 12-0588

Description: The target is mounted with magnet attachment onto the front of detectors 12-0509, 12-0752 and 12-0702, as well as measuring units 12-0433 and 12-0434.

Note: -

[E]




Target E-series 20 x 20

Part No: 12-0794

Description: Rough alignment target for measuring units ES/EM, detectors E4, E5 and E7. Can be mounted to cover laser opening, functioning as dust cover and protection. With reflective centre point.

Note: Only one target included per Part No., i.e. if you order targets for a pair of measuring units, you will need two 12-0794.

[D][E]

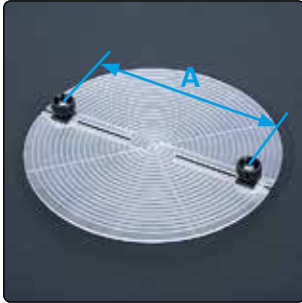

Large target extruder

Part No: 12-0810

Description: Transparent target with adjustable magnets for mounting on tube end. Splits in two, to fit in the transportation case.

Note: A=Min.–Max. Ø 45–200 mm [1.77–7.87"] approximately. Target Ø 200 mm [7.87"]

[D]



Target cardan

Part No: 12-0139

Description: Large target for use when aligning cardan/offset mounted machines. The target clamps onto the front of the D-series measuring units.

Note: -

[E]




Wireless unit (Version 2, ESP32-MINI-1)

Part No: 12-1336

Description: Unit for wireless communication. No internal battery. For E-series units: Part No. 12-0509, 12-0702, 12-0752, 12-0434, 12-0433, 12-0789, 12-0790 and 12-0824.

Note: This wireless unit Version 2 which has the UKCA mark on the label does only work with above mentioned units which *also* have the UKCA mark, except for 12-0509 (E5 detector) with which the Wireless unit Version 2 is fully compliant regardless of detector version. For older products spare part 12-0436 has to be used. Please read full information on page 80 about this limitation before ordering.

[D][E]



AC adaptor for D23

Part No: 12-1225

Description: For continuous power supply of the laser transmitter D23. 100–240V AC, 50–60 Hz, 600 mA / 5V DC, 4A.

Note: Also includes wall socket cable for the region where it is to be shipped (not pictured).

[E]



Splitter cable B, for charging

Part No: 12-0725

Description: To connect two Easy-Laser® units when charging.

Note: Only for charging, the cable cannot be used to transfer any measurement data. Not for use with 12-0738.

[E]

**Splitter cable A, for charging two 12-0738****Part No:** 12-0728**Description:** For charging two wireless units with battery, Part No. 12-0738.**Note:** Only for charging 12-0738, the cable cannot be used to transfer any measurement data.

[E | XT]

**DC to USB adapter****Part No:** 12-0751**Description:** Adaptor to be used with cable 12-0989 and 12-0750.**Note:** Cannot transfer any measurement data.

[E]

**Splitter box****Part No:** 12-0597**Description:** Used for connection of up to four Easy-Laser® units when charging them.**Note:** Standard "red" cables also needed.

[E | XT]

**DC split cable for charging****Part No:** 12-0989**Description:** Cable for charging the units of system E420, E540 and XT440, XT550, XT660, XT770, XT980.**Note:** This cable cannot transfer any measurement data.

[D | E]

**"Red cable", 1.0 m [39.3"]****Part No:** 12-0179**Description:** For connecting Easy-Laser® measurement equipment. With Push-Pull connectors.**Note:** -

[D | E]

**"Red cable", 2.0 m [78.7"]****Part No:** 12-0074**Description:** For connecting Easy-Laser® measurement equipment. With Push-Pull connectors.**Note:** -

[D | E]

**"Red cable", extension, 5.0 m [16.4']****Part No:** 12-0108**Description:** For connecting Easy-Laser® measurement equipment. With Push-Pull connectors.**Note:** Extension cable.

[D | E]

**"Red cable", extension, 10.0 m [32.8']****Part No:** 12-0180**Description:** For connecting Easy-Laser® measurement equipment. With Push-Pull connectors.**Note:** Extension cable.

[D | E]

**Cable support****Part No:** 12-0321**Description:** If the cable is accidentally pulled with great force, this support will prevent the connector from damage. It will also minimise the risk of moving the detector out of position.**Note:** -

| D |

**Printer cable****Part No:** 03-0241**Description:** For connection of the thermal printers 03-0341 and 03-0032 to display unit D279.**Note:** -

| D |

**PC cable ("null modem")****Part No:** 03-0333**Description:** Length 1.8 m [71"]**Note:** -

| D |

**USB/RS232 adaptor****Part No:** 03-0722**Description:** Adaptor and cable extension.**Note:** Requires internet connection and Windows update.

| E | XT |

**USB A - USB B cable****Part No:** 03-0822**Description:** Cable with USB A to USB B connectors.**Note:** -

| E |

**Charger for E-series display unit****Part No:** 03-1243**Description:** -**Note:** Wall socket connection cable (charger cable) also needed, choose part depending on country of use.

| XT |

**Charger for XT-series*****Part No:** 03-1256**Description:** -**Note:** *Not for system XT550 or XT50 units. Wall socket connection cable also needed, choose part depending on country of use.

| XT550 |

**Charger for XT550 and XT50 units****Part No:** 12-1281**Description:** -**Note:** Wall socket connection cable (charger cable) also needed, choose part depending on country of use.

| E | XT |

**Charger cable, EUR****Part No:** 03-0892**Description:** -**Note:** Charger unit also needed.

| E | XT |

**Charger cable, USA****Part No:** 03-0893**Description:** -**Note:** Charger unit also needed.

| E | XT |

**Charger cable, UK****Part No:** 03-0894**Description:** -**Note:** Charger unit also needed.

| E | XT |

**Charger cable, AUS****Part No:** 03-0895**Description:** -**Note:** Charger unit also needed.

| E | XT |

**HDMI to HDMI cable****Part No:** 03-0901**Description:** Length 3 m.**Note:** -

| E |

**VGA to VGA cable****Part No:** 03-0902**Description:** Length 3 m.**Note:** -

| E |

**Barcode reader****Part No:** 12-0619**Description:** For registration of machine data. Connected to the USB port.**Note:** Barcode stickers are no more available from Easy-Laser, but any other type can be used instead.


| E |

**Printer for E-series****Part No:** 03-1004**Description:** Battery operated thermal printer. With USB cable and 110–220V charger. For connection to all systems with E-series display units. Wall socket connection cable also needed, choose part depending on country of use.**Note:** 1 paper roll included. Spare rolls, Part No. 03-0041.


| E |

**VGA/HDMI kit, for serial number 94177 and newer****Part No:** 12-0840**Description:** Makes it possible to show the display unit screen on a TV or projector. Includes cable 03-0901 (HDMI), cable 03-0902 (VGA), converter and VGA circuit board.**Note:** Only for Display unit 12-0418 (E51) with serial number 94177 and higher. The VGA kit (the circuit board) must be ordered at system purchase for factory installation, it cannot be mounted afterwards.


| XT |

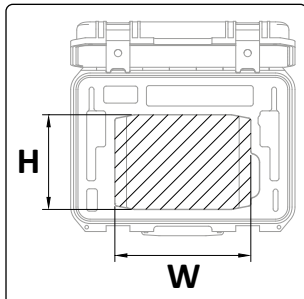**Carrying case Medium for system XT440/XT660****Part No:** 12-0973**Description:** Carrying case with pre-shaped interior for system XT440 and XT660.**Note:** The interior has space for display unit XT12. If other display unit is to be placed in the case, please note the shape and dimension of the cutout (picture to the left). W=266 mm [10.4"], H= 195 mm [7.6"].**Note 2:** No system name sticker is included if not asked for.


| XT |

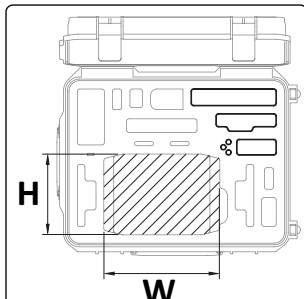**Carrying case Large for XT440/XT660/XT770****Part No:** 12-1049**Description:** With wheels. With pre-shaped interior for system XT440, XT660 and XT770. This case also carries some accessories, please see system XT660 and XT770 brochures for more information.**Note:** The interior has space for display unit XT12. If other display unit is to be placed in the case, please note the shape and dimension of the cutout (picture to the left). W=266 mm [10.4"], H= 195 mm [7.6"].**Note 2:** No system name sticker is included if not asked for.

| XT |

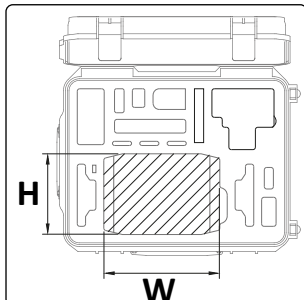**Carrying case Large for XT770 + laser transmitter****Part No:** 12-1132**Description:** With wheels. Pre-shaped interior for system XT770 with XT laser transmitter. Please note: No pre-cut space for BTA or VIB accessories, but the general space under the XT12 might be used.**Note:** The interior has space for display unit XT12. If other display unit is to be placed in the case, please note the shape and dimension of the cutout (picture to the left). W=266 mm [10.4"], H= 195 mm [7.6"].**Note 2:** No system name sticker is included if not asked for.

| XT |

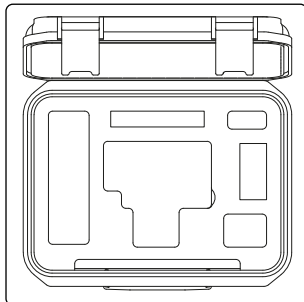

Carrying case for XT laser transmitters

Part No: 12-1290

Description: Carrying case with pre-shaped interior for laser transmitter XT20 or XT22, plus associated accessories.

Note: No system name sticker is included if not asked for.

| E |



Carrying case for system E710

Part No: 12-0442

Description: Carrying case with pre-shaped interior for system E710.

Note: -

| D | E |



Transportation case

Part No: 12-0237

Description: -

Note: Uncut foam.

| E |



Carrying case Large for system E540

Part No: 12-1020

Description: Carrying case with interior for system E540.

Note: Pre-cut also for accessories, just remove foam blocks (blocks removed on picture).

| E | XT |



Transportation case for system E180 and XT190

Part No: 12-0804

Description: Carrying case with interior for belt alignment units.

Note: No system name sticker is included if not asked for.

| E | XT |



Plastic case for small items

Part No: 03-0792

Description: Transportation case with foam interior.

Note: This is the standard case included with Easy-Laser systems.

Transportation case

Part No: 03-0909

Description: Rigid case for D22 or D23, or other accessories of your choice.

Note: The foam is cut to order. Specify what the case will be used for. Otherwise it will be delivered with foam uncut.

| E |



Protective case for display unit E51, E52 and E53

Part No: 01-1379

Description: With strap.

Note: -

| E |



Shoulder strap for display unit E-series

Part No: 12-0495

Description: -

Note: -

| D | E | XT |



Safety strap

Part No: 03-1406

Description: Bahco 3875-LY2, for 3 kg [6.6 lbs] weight. For use with laser transmitter D22/D23/XT20/XT22 and Digital Levels E290 and XT290.

Note: Screw 01-1402 for fastening the strap might also be needed.

| E | XT |



Measuring tape, 3 m [9.8']

Part No: 03-0824

Description: Fits the cases for the E- and XT-systems.

Note: -

| E |



Measuring tape, 5 m [16.4']

Part No: 03-0842

Description: Fits the cases for the E-series systems.

Note: -

| D | E | XT |



Demo unit Shaft

Part No: 12-0416

Description: For shaft alignment training. Can simulate both coupled and uncoupled shafts. With two shims 1.00 mm included. Dimensions: appr. 400x200x200 mm [15.7x7.8x7.8"].

Note: To simulate an actual alignment, shims (Type A) of different thicknesses can be used. Measuring units and brackets not included.

| D | E | XT |



Demo unit Shaft, steel

Part No: 03-1332

Description: For shaft alignment training. Can simulate both coupled and uncoupled shafts. Two units or more can be connected in series to simulate machine train. With two shims 1.00 mm included. Dimensions: WxHxD appr. 640x275x255 mm [25.2x10.8x10.0"].

Note: To simulate an actual alignment, shims (Type A) of different thicknesses can be used. Measuring units and brackets not included.



Demo unit Sheave

Part No: 12-0236

Description: Can be placed standing or lying down. WxHxD: 660x200x100 mm. Weight: 8 kg.



Note: BTA and targets not included.

| XT |

**Stinger for XT280****Part No:** 03-1326**Description:** Accessory probe for the XT280 Vibrometer.**Note:** Length 100 mm.

| XT |

**Accelerometer magnet for XT280****Part No:** 03-1327**Description:** Accessory probe for the XT280 Vibrometer.**Note:** -

**Top for D23****Part No:** 01-0618 + 03-0505**Description:** For protection of the rotating head.**Note:** Top and screw are separate articles.**Target for BTA, 18 mm****Part No:** 12-0394**Description:** Suitable for laser transmitter 12-0309, 12-0390, and 12-1325.**Note:** 1 pc.**Target for BTA, 15 mm****Part No:** 12-0213**Description:** Suitable for Easy-Laser® D80.**Note:** 1 pc.**Barrel nut****Part No:** 01-0045**Description:** For the standard chain.**Note:** -**Nut****Part No:** 01-0042**Description:** For the standard chain.**Note:** -**Chain, stainless steel****Part No:** 12-0386**Description:** For use with 12-0337.**Note:** Does not fit with standard chains.

[D | E]

**V-bracket****Part No:** 12-0130**Description:** For mounting on shaft or coupling.**Note:** Just bracket, no chain.**Screw M6x14****Part No:** 03-0061**Description:** -**Note:** -**Rod tightening tool, 4 mm****Part No:** 01-0048**Description:** -**Note:** -**Locking screw****Part No:** 01-0039**Description:** Fits measuring units; 12-0001, 12-0002, 12-0119, 12-0120, 12-0114, 12-0116, 12-0776, 12-0777, 12-0698, 12-0697, 12-0746, 12-0747. Detectors; 12-0005, 12-0201, 12-0255.**Note:** -**Locking screw****Part No:** 01-1953**Description:** Fits measuring units; 12-0434, 12-0433. Detectors; 12-0702, 12-0509, 12-0752.**Note:** -**Locking screw****Part No:** 01-1866**Description:** Fits measuring units; 12-0943, 12-0944, 12-1028, 12-1029, 12-1026, 12-1027, 12-1045, 12-1046.**Note:** -



Spare locks for carrying cases

Part No: -

Description: Spare locks for different models of Easy-Laser® carrying cases.

Note: Ask us for more details on pricing and availability. *Always measure width before ordering!*



Padded case for BTA

Part No: 03-0591

Description: Padded case with belt strap.

Note: -




Cleaning cloth

Part No: 03-0878

Description: For cleaning of optical surfaces such as laser aperture and PSD window.

Note: -

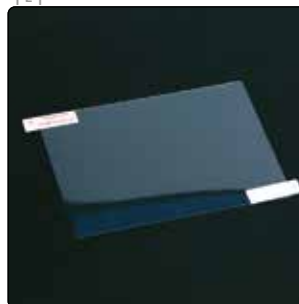


LCD display protection film for E51/E52/E53

Part No: 03-0972

Description: Thin film for scratch protection of the LCD display.

Note: -

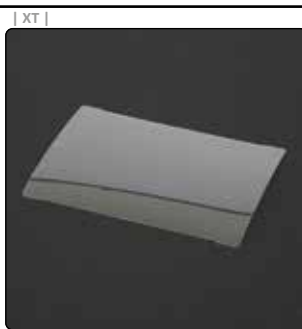

LCD display protection film for XT11

Part No: 01-1945

Description: Thin film for scratch protection of the LCD display.

Note: -



Thermo paper roll

Part No: 03-0041

Description: Paper roll for printer 03-0032 and 03-0341.

Note: -



Batteries

Description:

A. 3.6 V, Lithium (for BTA Ex), Part Nr 03-0730

B. 1.5 V, LR6 Alkaline, Part Nr 03-0247

C. 1.5 V, LR14 Alkaline, Part Nr 03-0242

D. 9V, 6LR61 Alkaline, Part Nr 03-0642



Vapor capsule

Zerust VC2-2

Part No: 03-1184

Description: Protects metals against rust and corrosion. Estimated life span 2 years.

Note: For use in system cases. With adhesive backing.



Sticker "This machine is aligned with"

Part No: 04-0053

Description: To stick on aligned machines. With writable surface for date and operator signature.

Note: 25 stickers.



QR code sticker

Part No: 04-0307

Description: To stick on machines. Read it from within the XT app for easy access to machine data etc.

Note: 10 stickers with unique numbers.



Laser target sticker

Part No: 04-0146

Description: To be used as reference point when doing geometrical measurements. Red reflective cross for higher visibility.

Note: Size 35x35 mm [1.38x1.38"]




Screwdriver Torx T8

Part No: 03-1429

Description: -

Note: -

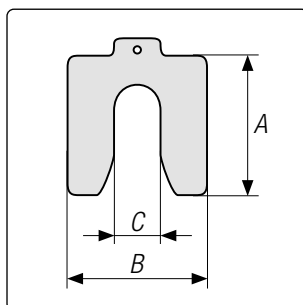

Shims case 1, 180 shims

Part No: 12-0258

Description: 180 shims, 10 pcs of each shim included. Weight 3.9 kg.

Shims type 1, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.


Shims type 2, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.

Shims type 3, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.

Note: Shims type 1, A: 55 mm, B: 50 mm, C: 15 mm

Shims type 2, A: 75 mm, B: 70 mm, C: 23 mm

Shims type 3, A: 90 mm, B: 80 mm, C: 32 mm

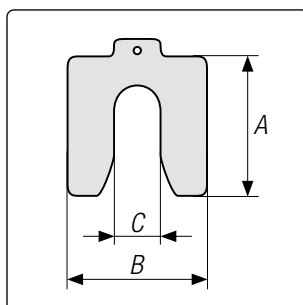

Shims case 2, 360 shims

Part No: 12-0259

Description: 360 shims, 20 pcs of each shim included. Weight 6.1 kg.

Shims type 1, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.


Shims type 2, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.

Shims type 3, thickness 0.05, 0.10, 0.20, 0.50, 0.70, 1.00 mm.

Note: Shims type 1, A: 55 mm, B: 50 mm, C: 15 mm

Shims type 2, A: 75 mm, B: 70 mm, C: 23 mm

Shims type 3, A: 90 mm, B: 80 mm, C: 32 mm

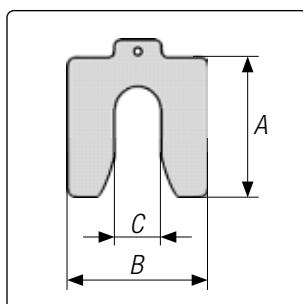

Shims case 3, shims of your choice

Part No: 12-0743


Description: For this case you choose number of shims yourself, from type 1, 2, 3, 4. We recommend minimum 10pcs/model. Please see price list for dimensions. Weight, case without shims 3.2 kg.

Note: Shims type 1, A: 55 mm, B: 50 mm, C: 15 mm

Shims type 2, A: 75 mm, B: 70 mm, C: 23 mm

Shims type 3, A: 90 mm, B: 80 mm, C: 32 mm

Shims type 4, A: 125 mm, B: 105 mm, C: 44 mm

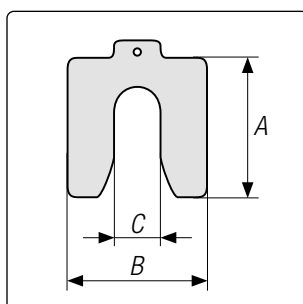

Shims case 4, shims of your choice

Part No: 12-0755


Description: For this case you choose number of shims yourself, from type 2, 3, 4, 5. We recommend minimum 10pcs/model. Please see price list for dimensions. Weight, case without shims 3.2 kg.

Note: Shims type 2, A: 75 mm, B: 70 mm, C: 23 mm

Shims type 3, A: 90 mm, B: 80 mm, C: 32 mm

Shims type 4, A: 125 mm, B: 105 mm, C: 44 mm

Shims type 5, A: 200 mm, B: 200 mm, C: 85 mm

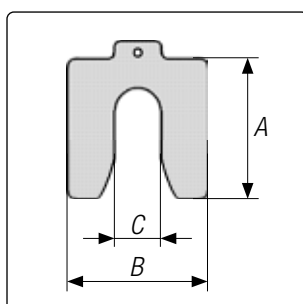

Shims

Part No: See price list.

Description: Blister packs of 10 pcs/size.

Type 1, thickness [mm] 0.05, 0.10, 0.20, 0.40, 0.50, 0.70, 1.00, 2.00, 3.00.

Type 2, thickness [mm] 0.05, 0.10, 0.20, 0.40, 0.50, 0.70, 1.00, 2.00, 3.00.

Type 3, thickness [mm] 0.05, 0.10, 0.20, 0.40, 0.50, 0.70, 1.00, 2.00, 3.00.

Type 4, thickness [mm] 0.05, 0.10, 0.20, 0.40, 0.50, 0.70, 1.00, 2.00, 3.00.

Type 5, thickness [mm] 0.05, 0.10, 0.20, 0.40, 0.50, 0.70, 0.80, 1.00, 2.00, 3.00.

Dimensions [mm]: Type 1, A: 55, B: 50, C: 15. Type 2, A: 75, B: 70, C: 23. Shims type 3, A: 90, B: 80, C: 32. Type 4, A: 125, B: 105, C: 44. Type 5, A: 200, B: 200, C: 85.



Display unit E-series: E52

Part No: 12-0700

Description: Available in different measurement program configurations. Which programs are available depends on in which system the display unit is included. Connectors: USB A, USB B, Easy-Laser® equipment, charger.

Note: Dust and splash guard for connectors removed on upper right picture.

| D | E |

**Tripod head****Part No:** 03-1338**Description:** For use on tripod 12-0269 with e.g. D22 and Angular prism.**Note:** -

| D | E |

**Extruder cardan joint****Part No:** 12-1279**Description:** For the extruder bracket.**Note:** -

| D | E |

**Extruder rod handle****Part No:** 12-1280**Description:** For the extruder bracket.**Note:** -

| D | E |

**Velcro clip with pin****Part No:** 01-1703**Description:** For the extruder bracket.**Note:** -

| E |

**Charger for E-series printer****Part No:** 03-1459**Description:** Replacement charger for printer Seiko DPU-S445.**Note:** Wall socket connection cable (charger cable) also needed, choose part depending on country of use.

| XT |



**Mounting screws for XT laser transmitters****Part No:** 12-1300**Description:** Screws for mounting the unit on different brackets.**Note:** Rod tightening tool, Screw for safety strap, 6 pcs M6x16 mm MC6S, 8 pcs M6x20 mm MC6S, 4 pcs Set screw 6x8 mm. In plastic box.










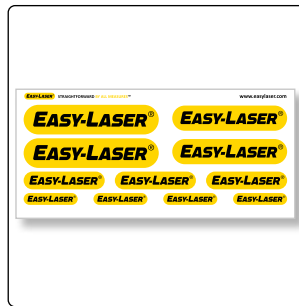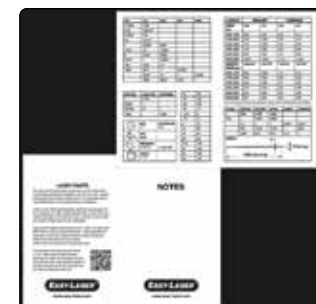














| E |



























Please read full information about this unit on page 80 before ordering!

























Wireless unit (Version 1)**Part No:** 12-0436**Description:** Unit for wireless communication. No internal battery. For E-series units: Part No. 12-0702, 12-0752, 12-0434, 12-0433, 12-0789, 12-0790 and 12-0824.**Note:** This wireless unit Version 1 is a spare part, intended for use with the above mentioned detectors and measuring units only. For 12-0509 (E5 detector) we recommend using wireless unit Version 2 with Part No. 12-1336 instead. Please read full information on page 80 about this limitation before ordering.

**Cap****Part No:** 13-0004**Description:** Cap made of 100% cotton. Easy-Laser® embroidery on front. With strap for size adjustment.**Note:** Not always in stock. Price upon request.**USB memory****Part No:** 03-0914**Description:** 4 GB memory stick USB. Easy-Laser® logo engraved on one side as on picture.**Note:** Price upon request.**Pen****Part No:** 13-0006**Description:** With blue ink. Easy-Laser® logo as pictured. Good quality pen.**Note:** Not always in stock. Price upon request.**Key holder****Part No:** 01-1095**Description:** With snap-hook and string for mobile phone.**Note:** Not always in stock. Price upon request.**Logo sticker****Part No:** 04-0125 (small), 04-0124 (large)**Description:** Durable sticker with strong adhesive. Same sticker as on the system cases. Available in two sizes: 200x44 mm [7.87x1.73"] and 305x67 mm [12.01x2.64"].**Note:** Price upon request.**Easy-Laser® logo stickers****Part No:** 04-0252**Description:** Sheet with laminated logo stickers with the following lengths: 100 mm (2 pcs), 85 mm (2 pcs), 60 mm (3 pcs) and 40 mm (4 pcs) / [3.94" (2 pcs), 3.35" (2 pcs), 2.36" (3 pcs), 1.57" (4 pcs)]**Note:** -**Keychain with spirit level****Part No:** 13-0013**Description:** Keychain with spirit level (plastic block 40x15x15 mm). Easy-Laser® logo as pictured. For give-away purpose/not calibrated.**Note:** Not always in stock. Price upon request.**A5 Notes****Part No:** 13-0012**Description:** 25 note papers, glued with cardboard back.**Note:** -**Playing cards****Part No:** 13-0007**Description:** Deck of cards. International symbols. Easy-Laser® logo and web address "www.easylaser.com" printed as on picture.**Note:** Not always in stock. Price upon request.**Notebook for the technician****Part No:** 05-0792**Description:** Notebook measuring 90x140 mm that fits easily into a pocket in your work clothes, with an insert comprising 38 pages of graph paper and conversion tables on the inside of the cover. Laser facts on back cover.**Note:** Not always in stock. Price upon request.

























 <p>System D670 Parallelism (Discontinued) Part No: 12-0224 Note: Please see system E970 instead.</p>	 <p>System D800 Machine Spin (Discontinued) Part No: 12-0220 Note: Please see system E915 instead.</p>
 <p>System D660 Turbine (Discontinued) Part No: 12-0185 Note: Please see system E960 instead.</p>	 <p>System D662 Turbine (Discontinued) Part No: 12-0662 Note: Please see system E960 instead.</p>
 <p>System D663 Turbine (Discontinued) Part No: 12-0663 Note: Please see system E960 instead.</p>	 <p>System D664 Turbine (Discontinued) Part No: 12-0664 Note: Please see system E960 instead.</p>
 <p>System D630 Extruder (Discontinued) Part No: 12-0193 Note: Please see system E930 instead.</p>	 <p>System D640 Machine tool (Discontinued) Part No: 12-0552 Note: -</p>
 <p>System D652 Linebore (Discontinued) Part No: 12-0652 Note: Please see system E950 instead.</p>	 <p>System D650 Linebore (Discontinued) Part No: 12-0034 Note: Please see system E950 instead.</p>
 <p>System D600 Machine (Discontinued) Part No: 12-0133 Note: Please see system E920 instead.</p>	 <p>System D525 Shaft (Discontinued) Part No: 12-0231 Note: Please see system E710 instead.</p>
 <p>System D525 B Shaft (Discontinued) Part No: 12-0235 Note: Please see system E710 instead.</p>	 <p>System D505 Shaft (Discontinued) Part No: 12-0207 Note: -</p>
 <p>System D480 Shaft (Discontinued) Part No: 12-0422 Note: -</p>	 <p>System D450 Shaft (Discontinued) Part No: 12-0300 Note: -</p>
 <p>System E530 Shaft (Discontinued) Part No: 12-0695 Note: -</p>	 <p>Easy-Laser® D550 Extreme™ Ex/ ATEX/IECEx (Discontinued) Part No: 12-0340</p>
 <p>System E940 Machine tool (Discontinued) Part No: 12-0761 Note: Replaced by different configurations.</p>	 <p>System E975 Roll Alignment (Discontinued) Part No: 12-0854</p>
 <p>System E540-A Shaft (Discontinued) Part No: 12-1043</p>	 <p>System E540-B Shaft (Discontinued) Part No: 12-0775</p>
 <p>System E720 Shaft/Geo (Discontinued) Part No: 12-0955</p>	 <p>System D160 BTA (Discontinued) Part No: 12-0411 Note: Please see system XT190 instead.</p>







<div data-bbox="79 107 215 257"></div> <div data-bbox="239 118 625 230"> Easy-Laser® D130 BTA Ex (Discontinued) Part No: 12-0400 </div>	<div data-bbox="798 107 933 257"></div> <div data-bbox="957 118 1393 264"> System D150 BTA digital (Discontinued) Part No: 12-0310 Note: Please see system XT190 instead. </div>
<div data-bbox="79 288 215 439"></div> <div data-bbox="239 297 671 443"> System E170 BTA (Discontinued) Part No: 12-0659 Note: Please see system XT190 instead. </div>	<div data-bbox="798 288 933 439"></div> <div data-bbox="957 297 1463 427"> System E180 BTA (Discontinued) Part No: 12-0796 + (12-0850: system without laser transmitter) Note: Please see system XT190 instead. </div>
<div data-bbox="79 468 215 618"></div> <div data-bbox="239 472 544 618"> Printer 220 V (Discontinued) Part No: 03-0032 Note: Replaced by 03-1323. </div>	<div data-bbox="798 468 933 618"></div> <div data-bbox="957 472 1267 618"> Printer 110 V (Discontinued) Part No: 03-0341 Note: Replaced by 03-1323. </div>
<div data-bbox="79 647 215 797"></div> <div data-bbox="239 649 609 795"> Back Pack System Large (Discontinued) Part No: 03-1044 Note: - </div>	<div data-bbox="798 647 933 797"></div> <div data-bbox="957 649 1329 795"> Back Pack System Large (Discontinued) Part No: 03-1045 Note: - </div>
<div data-bbox="79 826 215 976"></div> <div data-bbox="239 824 679 936"> AC adaptor for D22 and D75 (Discontinued) Part No: 12-0205 </div>	<div data-bbox="798 826 933 976"></div> <div data-bbox="957 824 1262 936"> AC adaptor for D23 (Discontinued) Part No: 12-0294 </div>
<div data-bbox="79 1005 215 1155"></div> <div data-bbox="239 1001 732 1146"> Carrying case for E540 and E530 (Discontinued) Part No: 03-1007 Note: Replaced by case 12-1020. </div>	<div data-bbox="798 1005 933 1155"></div> <div data-bbox="957 1001 1329 1113"> Transportation case Ex Large (Discontinued) Part No: 12-0456 </div>
<div data-bbox="79 1184 215 1335"></div> <div data-bbox="239 1176 663 1288"> Measuring tape, 2 m [6.5'] (Discontinued) Part No: 12-0012 </div>	<div data-bbox="798 1184 933 1335"></div> <div data-bbox="957 1176 1244 1243"> CD (Discontinued) Part No: 06-0001 </div>
<div data-bbox="79 1364 215 1514"></div> <div data-bbox="239 1350 683 1496"> Carrying case Small for E540 (Discontinued) Part No: 12-1025 Note: Please see 12-1020 instead. </div>	<div data-bbox="798 1364 933 1514"></div> <div data-bbox="957 1350 1490 1462"> Magnet base bracket for Linebore detector (Discontinued) Part No: 12-0329 </div>
<div data-bbox="79 1543 215 1693"></div> <div data-bbox="239 1527 547 1673"> Magnetic bracket (Discontinued) Part No: 12-0413 Note: Replaced by 12-1147. </div>	<div data-bbox="798 1543 933 1693"></div> <div data-bbox="957 1527 1267 1673"> Magnetic bracket (Discontinued) Part No: 12-1011 Note: Replaced by 12-1147. </div>
<div data-bbox="79 1722 215 1872"></div> <div data-bbox="239 1702 699 1803"> Offset bracket (Discontinued) Part No: 01-0076 Note: Please see 01-1165 instead. </div>	<div data-bbox="798 1722 933 1872"></div> <div data-bbox="957 1702 1334 1848"> Extension chain (Discontinued) Part No: 12-0319 Note: Please see 12-0128 instead. </div>
<div data-bbox="79 1901 215 2051"></div> <div data-bbox="239 1877 764 1991"> Height adjustment bracket for D6 (Discontinued) Part No: 12-0417 </div>	<div data-bbox="798 1901 933 2051"></div> <div data-bbox="957 1877 1212 1991"> Sun visor for D6 (Discontinued) Part No: 01-1352 </div>
<div data-bbox="79 2080 215 2231"></div> <div data-bbox="239 2054 612 2199"> Large target extruder (Discontinued) Part No: 12-0199 Note: Please see 12-0810 instead. </div>	<div data-bbox="798 2080 933 2231"></div> <div data-bbox="957 2054 1430 2154"> Sliding bracket (Discontinued) Part No: 12-0039 Note: Please see 12-1010 instead. </div>

<div data-bbox="81 107 124 129"> E </div>  <p>E-series Vibrometer probe E285 (Discontinued) Part No: 12-0656 Note: -</p>	<div data-bbox="804 107 847 129"> D </div>  <p>D-series Vibrometer probe D283 (Discontinued) Part No: 12-0283 Note: -</p>
<div data-bbox="81 288 124 311"> E </div>  <p>Wireless units kit for E530 (Discontinued) Part No: 12-0739 Note: -</p>	<div data-bbox="804 288 847 311"> E </div>  <p>Wireless unit for E530 (Discontinued) Part No: 12-0738 Note: -</p>
<div data-bbox="81 468 145 490"> D E </div>  <p>Adapter bracket for 40 mm rod distance (Discontinued) Part No: 12-0815 Note: -</p>	<div data-bbox="804 468 847 490"> D </div>  <p>Magnet base with turnable head, for D157 (Discontinued) Part No: 12-0608 Note: -</p>
<div data-bbox="81 647 124 669"> D </div>  <p>Cam shaft bracket (Discontinued) Part No: 12-0476 Note: -</p>	<div data-bbox="804 647 868 669"> D550 </div>  <p>Sun visor D550 (Discontinued) Part No: 12-0592 Note: -</p>
<div data-bbox="81 826 124 848"> E </div>  <p>Barcode sticker (Discontinued) Part No: 04-0147 Note: -</p>	<div data-bbox="804 826 847 848"> E </div>  <p>Charger 12–36V for car (Discontinued) Part No: 12-0585</p>
<div data-bbox="81 1005 124 1028"> E </div>  <p>Battery pack (Discontinued) Part No: 12-0617 Note: -</p>	<div data-bbox="804 1005 868 1028"> D E </div>  <p>Cable tester (Discontinued) Part No: 12-0362</p>
<div data-bbox="81 1184 129 1207"> XT </div>  <p>Small case for system XT440 (Discontinued) Part No: 12-0972 Note: Replaced by 12-0973</p>	<div data-bbox="804 1184 852 1207"> XT </div>  <p>ECOM Tab-Ex® 01 – (Discontinued) Part No: 12-1086</p>
<div data-bbox="81 1364 124 1386"> D </div>  <p>White Vaseline (Discontinued) Part No: 03-1193</p>	<div data-bbox="804 1364 847 1386"> D </div>  <p>Standard chain (Discontinued) Part No: 12-0033 Note: Please see 12-0625 instead.</p>
<div data-bbox="81 1543 145 1565"> D E </div>  <p>Side support for D75 (Discontinued) Part No: 12-0189</p>	<div data-bbox="804 1543 868 1565"> D E </div>  <p>Side support for E5, E7 and other detectors (Discontinued) Part No: 12-0188</p>
<div data-bbox="81 1722 124 1744"> D </div>  <p>AC adaptor for Display unit D279 (Discontinued) Part No: 12-0590</p>	<div data-bbox="804 1722 847 1744"> E </div>  <p>VGA/HDMI kit (Discontinued) Part No: 12-0573</p>
<div data-bbox="81 1901 145 1924"> D E </div>  <p>Safety strap (Discontinued) Part No: 12-0915 Note: Replaced by 03-1406 and 01-1402.</p>	<div data-bbox="804 1901 868 1924"> D E </div>  <p>Bracket for non-magnetic flanges, (Discontinued) Part No: 12-0628</p>
<div data-bbox="81 2080 124 2103"> D </div>  <p>Laser transmitter Ex for sheave/pulley alignment (Discontinued) Part No: 12-0390</p>	<div data-bbox="804 2080 847 2103"> D </div>  <p>Laser transmitter D246 (Discontinued) Part No: 12-0246 Note: Replaced by 12-0706.</p>

	Detector Extruder, diameter 20 mm [0.79"] (Discontinued) Part No: 12-0538		Detector Linebore (Discontinued) Part No: 12-0032
	Tool kit for system D550, complete (Discontinued) Part No: 12-0360		Detector D6 (Discontinued) Part No: 12-0201
	Offset hub for D75 (Discontinued) Part No: 12-0132 Note: Replaced by 12-0661.		Offset hub with arms (Discontinued) Part No: 12-0364 Note: Replaced by 12-0707 + 12-0661.
	Detector bracket "long stroke", Turbine (Discontinued) Part No: 12-0248 Note: Replaced by 12-0715.		Detector for sheave/pulley alignment (Discontinued) Part No: 12-0308 Note: Please see system XT190 instead.
	D-series Detector for belt alignment (Discontinued) Part No: 12-0403 Note: Please see system XT190 instead.		E-series Detector for belt alignment (Discontinued) Part No: 12-0657 Note: Please see system XT190 instead.
	E-series wireless Detector for belt alignment (Discontinued) Part No: 12-0791 Note: Please see system XT190 instead.		Measuring unit M, PSD 10x10 mm (Discontinued) Part No: 12-0001
	Measuring unit S, PSD 10x10 mm (Discontinued) Part No: 12-0002		Measuring unit M, 2 axis, PSD 18x18 mm, inclinometer (Discontinued) Part No: 12-0119
	Measuring unit S, PSD 18x18 mm, inclinometer (Discontinued) Part No: 12-0120		Measuring unit M, PSD 10x10 mm, inclinometer (Discontinued) Part No: 12-0423
	Measuring unit S, PSD 10x10 mm, inclinometer (Discontinued) Part No: 12-0424		Measuring unit S, PSD 30x30 mm, inclinometer (Discontinued) Part No: 12-0260
	Measuring unit M, PSD 30x30 mm, inclinometer (Discontinued) Part No: 12-0256		Measuring unit M, 2 axis, PSD 18x18 mm, inclinometer (Discontinued) Part No: 12-0116
	Detector 30 mm, D-series (Discontinued) Part No: 12-0255		Detector D5 (Discontinued) Part No: 12-0005
	Detector E4 (Discontinued) Part No: 12-0702 Note: Please see Detector E5 or E7 instead.		Measuring unit ELS30, PSD 30 mm (Discontinued) Part No: 12-0697

<div></div> <div> Measuring unit ELM30, PSD 30 mm (Discontinued) Part No: 12-0698 </div>	<div></div> <div> Detector D157 (Discontinued) Part No: 12-0157 </div>
<div></div> <div> Detector E8, 1-axis PSD (Discontinued) Part No: 12-0758 Note: Please see Detector E9 instead. </div>	<div></div> <div> Measuring unit M, Extreme™ (Discontinued) Part No: 12-0334 </div>
<div></div> <div> Measuring unit S, Extreme™ (Discontinued) Part No: 12-0335 </div>	<div></div> <div> Display unit Extreme™ EX: D336 (Discontinued) Part No: 12-0336 </div>
<div></div> <div> Display unit D-series: D279 (Discontinued) Part No: 12-0279 </div>	<div></div> <div> Display unit for sheave/pulley alignment (Discontinued) Part No: 12-0404 </div>
<div></div> <div> Angular prism D46 (Discontinued) Part No: 12-0046 Note: Replaced by 12-1136. </div>	<div></div> <div> Shaft alignment system for Vestas (Discontinued) Part No: 12-0797 (Vestas 4), 12-0825 (Vestas 3) Note: Replaced by 12-1143, 12-1142 and 12-1183. </div>
<div></div> <div> Roll alignment kit (Discontinued) Part No: 12-0856 </div>	<div></div> <div> Angle detector E2 (Discontinued) Part No: 12-0845 </div>
<div></div> <div> Angle bracket (Discontinued) Part No: 01-1768 </div>	<div></div> <div> Roll bracket (Discontinued) Part No: 12-0849 </div>
<div></div> <div> Large roll kit (Discontinued) Part No: 12-0885 </div>	<div></div> <div> Display unit E-series: E53 (Discontinued) Part No: 12-0748 </div>
<div></div> <div> Measuring unit ELS20 (Discontinued) Part No: 12-0747 </div>	<div></div> <div> Measuring unit ELM20 (Discontinued) Part No: 12-0746 </div>
<div></div> <div> Measuring unit ELS40 (Discontinued) Part No: 12-0777 </div>	<div></div> <div> Measuring unit ELM40 (Discontinued) Part No: 12-0776 </div>
<div></div> <div> Carrying case for system E420 (Discontinued) Part No: 03-1059 </div>	<div></div> <div> Carrying case Small for system XT440 (Discontinued) Part No: 12-1239 Note: Please see 12-0973 instead. </div>
<div></div> <div> System E420 Shaft (Discontinued) Part No: 12-0745 </div>	<div></div> <div> Battery pack with built-in wireless unit (Discontinued) Part No: 12-0618 </div>

<div> E </div>  <p>Batterypack with wireless technology, Kit (Discontinued) Part No: 12-0740</p>	<div> XT </div>  <p>ECOM Tab-Ex® 02 – Display unit (Discontinued) Part No: 12-1196</p>
<div> XT </div>  <p>XT11 – Display unit (Discontinued) Part No: 12-0961</p>	 <p>Laser transmitter for sheave alignment systems (Discontinued) Part No: 12-0309</p>
 <p>D90 BTA (Discontinued) Part No: 12-0415</p>	 <p>Tilt table with magnet base (Discontinued) Part No: 12-0742</p>
 <p>Height adjustment bracket for detector (Discontinued) Part No: 12-0937</p>	<div> E </div>  <p>Cardan bracket set (Discontinued) Part No: 12-0615</p>
<div> D </div>  <p>Cardan bracket set (Discontinued) Part No: 12-0125</p>	<div> D </div>  <p>Rod adapter for D157 (Discontinued) Part No: 12-0320</p>
<div> D E </div>  <p>Upgrade kit Long stroke (Discontinued) Part No: 12-0855</p>	<div> D E </div>  <p>Measuring unit holder for Angular prism D46 (Discontinued) Part No: 12-0709</p>
<div> E </div>  <p>Sun visor E-series (Discontinued) Part No: 12-0587</p>	<div> E XT </div>  <p>DC cable extension 1.5 m [59"] (Discontinued) Part No: 03-1203</p>
 <p>Luggage trolley (Discontinued) Part No: 03-1046</p>	<div> D E XT </div>  <p>Small magnet base (Discontinued) Part No: 12-1092</p>
<div> D E </div>  <p>Magnet base with linear digital scale (Discontinued) Part No: 12-0230</p>	<div> D550 </div>  <p>Magnet base with adapter for D550 (Discontinued) Part No: 12-0579</p>
<div> D E </div>  <p>Slide bracket XS (Discontinued) Part No: 12-0343</p>	<div> D E </div>  <p>Pin for hub (Discontinued) Part No: 12-1039</p>
 <p>Mounting pin for D146 (Discontinued) Part No: 12-0568</p>	 <p>Laser transmitter D146 (Discontinued) Part No: 12-0146</p>
<div> D E </div>  <p>Laser transmitter D26 Swivel (Discontinued) Part No: 12-1064</p>	<div> E </div>  <p>Measuring unit ESH (Discontinued) Part No: 12-0789</p>

<div> <div>E</div>  </div> <p>Measuring unit EMH (Discontinued) Part No: 12-0790</p>	<div> <div>E</div>  </div> <p>Detector E7H, HyperPSD™ (Discontinued) Part No: 12-0824</p>
<div> <div>E</div>  </div> <p>Bar bracket (Discontinued) Part No: 12-0988</p>	<div> <div>E</div>  </div> <p>Spindle bracket for measuring unit (Discontinued) Part No: 12-0787</p>
<div> <div>D E XT</div>  </div> <p>Angular adapter for detector, 90° (Discontinued) Part No: 12-1018</p>	<div> <div>D XT</div>  </div> <p>USB cable for Streaming values (Discontinued) Part No: 03-1043</p>
<div> <div>D E</div>  </div> <p>"Red cable", 2.0 m [78.7"] with angled connector (Discontinued) Part No: 12-0735</p>	<div> <div>D E</div>  </div> <p>"Red cable", extension, 0.5 m [1.6"] (Discontinued) Part No: 12-0762</p>
<div> <div>D E</div>  </div> <p>"Red cable", 0.4 m [15.7"] (Discontinued) Part No: 12-0289</p>	<div> <div>D E</div>  </div> <p>"Red cable", 0.16 m [6.3"] (Discontinued) Part No: 12-0494</p>
<div> <div>D</div>  </div> <p>Printer for D-series (Discontinued) Part No: 03-1323</p>	<div> <div>Ex</div>  </div> <p>Case for BTA Ex (Discontinued) Part No: 03-0736</p>
<div> <div>D</div>  </div> <p>Protective case for older display units (Discontinued) Part No: 03-0042</p>	<div> <div>D</div>  </div> <p>Protective case for display unit D279 (Discontinued) Part No: 03-0592</p>
<div> <div>D550</div>  </div> <p>Protective case for display unit D336 (Discontinued) Part No: 03-0799</p>	<div> <div>XT</div>  </div> <p>IR camera added to XT11 (Discontinued) Part No: 12-0968</p>
<div> <div>XT</div>  </div> <p>Camera removed from XT11 (Discontinued) Part No: 12-0985</p>	<div> <div>XT</div>  </div> <p>System XT440 with display unit (Discontinued) Part No: 12-0967 Note: Please see 12-0966 instead.</p>
<div> <div>XT</div>  </div> <p>System XT660 with display unit, case Medium (Discontinued) Part No: 12-1051 Note: Please see 12-1058 instead.</p>	<div> <div>XT</div>  </div> <p>System XT660 with display unit, case Large (Discontinued) Part No: 12-1052 Note: Please see 12-1059 instead.</p>
<div> <div>XT</div>  </div> <p>System XT770 with display unit, (Discontinued) Part No: 12-1095 Note: Please see 12-1096 instead.</p>	<div> <div>XT</div>  </div> <p>System XT770, with GEO Kit, with display unit, (Discontinued) Part No: 12-1027 Note: Please see 12-1128 and 12-1334 instead.</p>
<div> <div>XT</div>  </div> <p>System XT980 with display unit, (Discontinued) Part No: 12-1296 Note: Please see 12-1335 instead.</p>	


EASY-LASER®

TECHNICAL SPECIFICATIONS

READ THIS INFORMATION CAREFULLY:

CRUCIAL SOFTWARE AND ELECTRONICS UPDATES

- **The unit for wireless communication**, Part No. 12-0436, is replaced by a new product in November 2022 with new Part No. 12-1336. The new product has been updated with new electronics which affects backwards compatibility. The new unit has also got a new UKCA (UK Conformity Assessed) marking on the label.
The unit for wireless communication is used with detectors and measuring units in the E-series, namely 12-0509 (E5)/12-0702 (E4)/12-0752 (E7)/12-0434 (EM)/12-0433 (ES)/12-0790 (EMH)/ 12-0789 (ESH), 12-0824 (E7H).
- **Note!** The new wireless unit 12-1336 which has the UKCA mark on the label only works with above mentioned detectors and measuring units which also have the UKCA mark, except for the 12-0509 (E5) detector with which the new wireless unit 12-1336 is compatible. If replacing an old wireless unit to use with other products than E5 detector, you must make sure to order a 12-0436 unit (available as spare part). If, for some reason, you need to use the new wireless unit 12-1336 with an existing detector or measurement unit delivered before November 2022 (except for E5), you may also need to upgrade the measuring unit/detector. In such an event, please contact your local distributor for advice before ordering a new wireless unit.
- As of November 2022, the XT alignment app will no longer support the XT11 rev 1 Display unit (serial number 129231 or lower).
XT alignment app version 8.1 and higher will not be compatible with XT11 rev 1.
- XT measuring units produced in November 2022 or later will not be compatible with the XT11 rev 1 Display unit (serial number 129231 or lower). The new measuring units have the UKCA mark on the label from November 2022 onwards. If you want to purchase new measuring units and are currently using an XT11 rev 1 Display unit, please contact your local distributor for advice before placing an order.

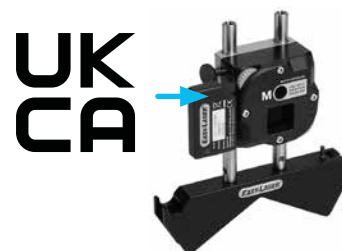

COMPATIBILITY BETWEEN D, E AND XT

Easy-Laser® measurement systems are extremely versatile in their standard form. By using clever accessories, you can adapt the systems for your own needs, now and in the future as your measurement requirements change. You can also combine parts from one system with another. This is cost-effective! However, there are some differences you need to know:

- The D-series, E-series and XT-series detectors and display units can only be used within its own product series. Note! One exception is the sheave alignment detector 12-1054, which can be connected to XT12, XT11, E51 and E52.
- The XT laser transmitters requires use of the XT Alignment app for calibration.
- Brackets for D- and E-series has a rod C–C of 40 mm, XT-series rod C–C is 56 mm. The XT offset bracket (12-1008) function as an adaptor for these two measures, but doesn't fit all older brackets.

Software communication




Brackets



EXPLANATION OF TECHNICAL DRAWINGS AND DATA

- On the following pages technical specifications for the most common units can be found. We will not list all products here.
- You should always also read the complete product description to find out about compatibility with other Easy-Laser® products.
- Please note that the measurement range for laser transmitters is the maximum range, and in reality depends on the detector used and the application.
- Operating times also depends on the actual application, therefore it is not specified for all products. See system specifications in each brochure for more detailed information. Li-Ion battery condition also affect the operating time.
- The drawings show the most important measures. Because of limited space we cannot always place the projections according to European drawing projection, but that is otherwise the method used.
- Specifications are quoted to 95% confidence level (coverage factor $k=2$).

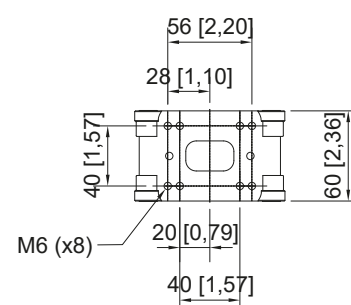

SPECIFICATIONS FOR BUILT-IN RECHARGEABLE BATTERIES (2022-11-11):



Easy-Laser Part No.	MSDS Document	Type	Nominal Voltage	Nominal Capacity	Energy	Included in
12-1100	A	Li-Ion	3.65 V	11400 mAh	41.61 Wh	12-0418 Display unit E51 12-0700 Display unit E52 12-0748 Display unit E53
03-0765	B	Li-Ion	3.7 V	660 mAh	2.5 Wh	12-0433 Measuring unit S 20x20 12-0434 Measuring unit M 20x20 12-0509 Detector E5 12-0752 Detector E7 12-0759 Detector E9 12-0789 Measuring unit ESH 20x20 12-0790 Measuring unit EMH 20x20 12-0799 Detector E3 12-0824 Detector E7H 12-0846 Precision level E290
03-1052	C	Li-Ion	3.7 V	330 mAh	1.22 Wh	12-0746 Measuring unit ELM 20 12-0747 Measuring unit ELS 20 12-0776 Measuring unit ELM 40 12-0777 Measuring unit ELS 40 12-1054 Detector BTA XT190
03-0971	D	Li-Ion	3.6 V	2600 mAh	9.36 Wh	12-0618 Battery pack wireless 12-0823 Laser transmitter E30 12-0845 Detector E2
12-0953	F	Li-Ion	3.7 V	2000 mAh	7.4 Wh	12-0943 Measuring unit XT40-M 12-0944 Measuring unit XT40-S 12-1028 Measuring unit XT60-M 12-1029 Measuring unit XT60-S 12-1045 Measuring unit XT70-M 12-1046 Measuring unit XT70-S 12-1241 Precision level XT290
12-1301 (2 x 12-0953)	F	Li-Ion	7.4 V	2000 mAh	2x7.4 Wh	12-1272 Laser transmitter XT20 12-1273 Laser transmitter XT22
12-1307	K	Li-Ion	3.7 V	1960 mAh	7.25 Wh	12-1026 Measuring unit XT50-M 12-1027 Measuring unit XT50-S
N/A	H	Li-Ion	3.8 V	4450 mAh	16.91 Wh	12-1196 Ecom Tablet for XT550 12-1086 Ecom Tablet for XT550
N/A	L	Li-Ion	3.85 V	4900 mAh	18.87 Wh	12-1327 Ecom Tablet for XT550
12-1099	I	Li-Ion	7.3 V	5700 mAh	41.64 Wh	12-0961 Display unit XT11 (2 pcs)
12-1328	J	Li-Ion	3.6 V	18900 mAh	68.04 Wh	12-1291/12-1292 Display unit XT12

INFORMATION ABOUT CHARGERS

Part No. 03-1243, Charger for E-series

Model: GPE024P-120200-D

AC Input: 100–240 V AC ~0,75 A, 50–60 Hz

DC Output: 12.0 V DC 2.0 A, 24.0 W

Efficiency: ≥86.2% (avg.) at 115Vac/60Hz or 230Vac/50Hz input voltage and 10%, 25%, 50%, 75% or 100% of max output current.
≤0.1 W at no load power consumption, at normal line input.**Part No. 12-1281, Charger for XT50/XT550**

Model: GPE024P-120200-D

AC Input: 100–240 V AC ~0,75 A, 50–60 Hz

DC Output: 12.0 V DC 2.0 A, 24.0 W

Efficiency: ≥86.2% (avg.) at 115Vac/60Hz or 230Vac/50Hz input voltage and 10%, 25%, 50%, 75% or 100% of max output current.
≤0.1 W at no load power consumption, at normal line input.**Part No. 03-1256, Charger for XT-series**

Model: EA10682N-150


AC Input: 100–240 V AC ~2.0 A, 50–60 Hz


DC Output: 15.0 V DC 4.0 A, 60.0 W

Efficiency: ≥89.0% (avg.) at 115Vac/60Hz or 230Vac/50Hz input voltage and 25%, 50%, 75% or 100% of max output current.
≥79.0% at 115Vac/60Hz or 230Vac/50Hz input voltage and 10% of max output current.
≤0.15W at no load power consumption, at normal line input.

Display unit XT12, Part No. 12-1291 / 12-1292

mm [inch]

<div><div></div><div><div>CE</div><div>UK</div><div>CA</div></div></div>	
Type of display/size	8" LCD capacitive multi-touch colour display
Battery type	Heavy duty Li Ion rechargeable
Operating time	Up to16 h continuously
Connections	USB A, USB C, Charger, AV (HDMI)
Communication	Wireless technology, WiFi
Camera, with LED diode	13 Mp autofocus
IR camera (Only in model 12-1292)	FLIR LEPTON® 0–400 °C [32–752 °F]
Help functions	Built-in manual
Environmental protection	IP66/67, designed for outdoor use (pollution degree 4)
Operating temperature	-10–50 °C [14–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95%
Loudspeakers	Built-in, rear-facing
Charger	15 V
Housing material	PC/TPE or PC/TPU
Dimensions	WxHxD: 269.0x190.0x49.4 mm [10.59x7.48x1.95"]
Weight	1400 g [49.4 oz]

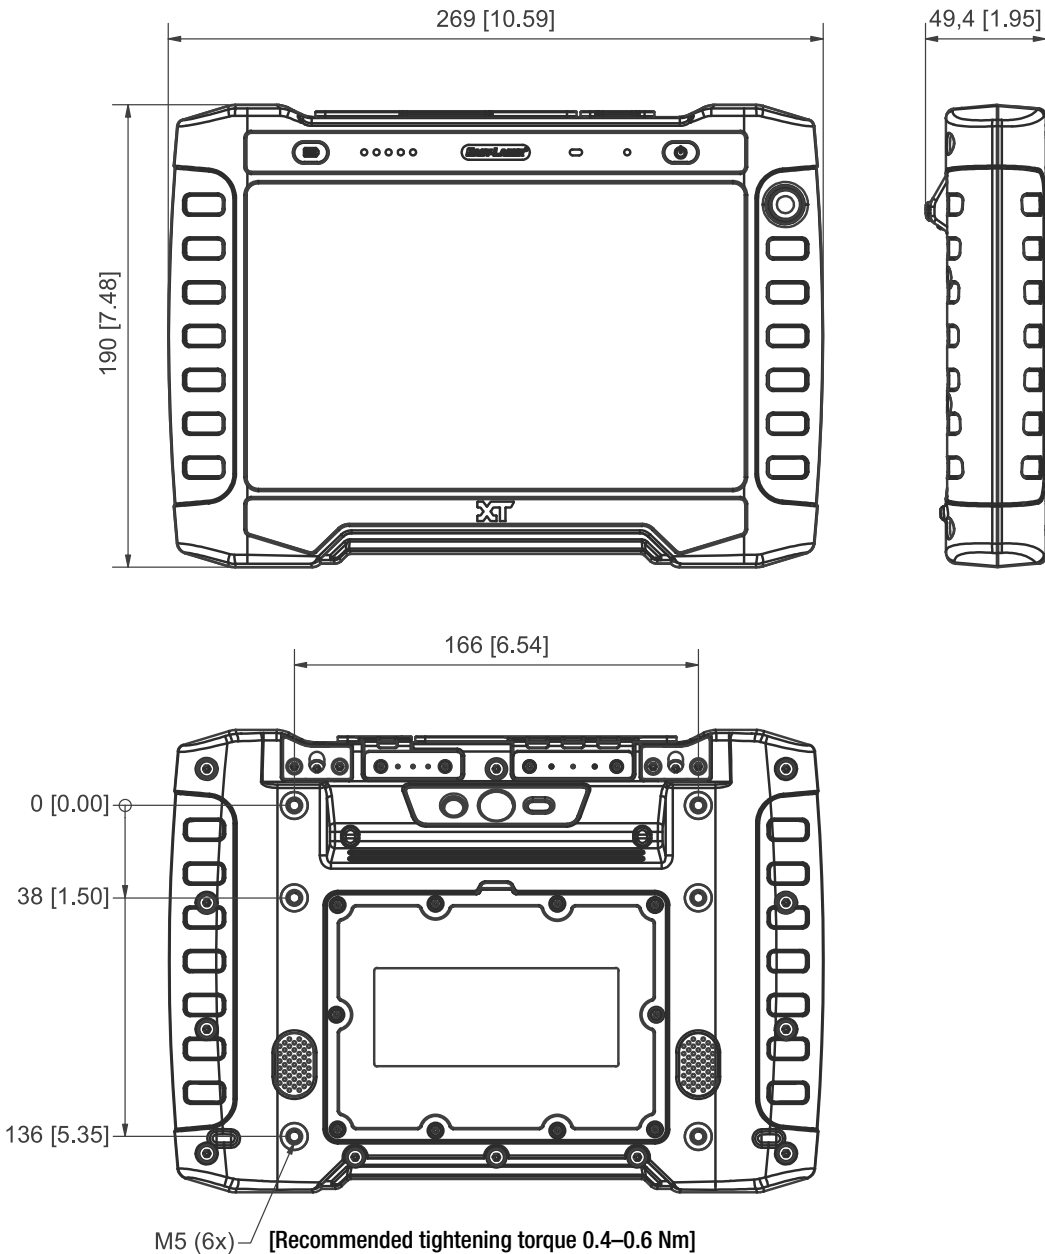


Display unit E51, Part No. 12-0418



mm [inch]


Type of display/size	VGA 5.7" colour screen, backlit LED
Displayed resolution	0.001 mm / 0.05 thou (0.0001 mm with HyperPSD units)
Battery	Heavy duty Li Ion chargeable
Temperature range	-10–50 °C [14–122 °F]
Connections	USB A, USB B, Easy-Laser® units, Charger
Communication	BT wireless technology and cable
Internal memory	>100 000 measurements can be saved
Help functions	Calculator, Unit converter
Environmental protection	IP class 65
Housing material	PC/ABS + TPE
Dimensions	WxHxD: 250x175x63 mm [9.8x6.9x2.5"]
Weight (without batteries)	1020 g [2.3 lbs]

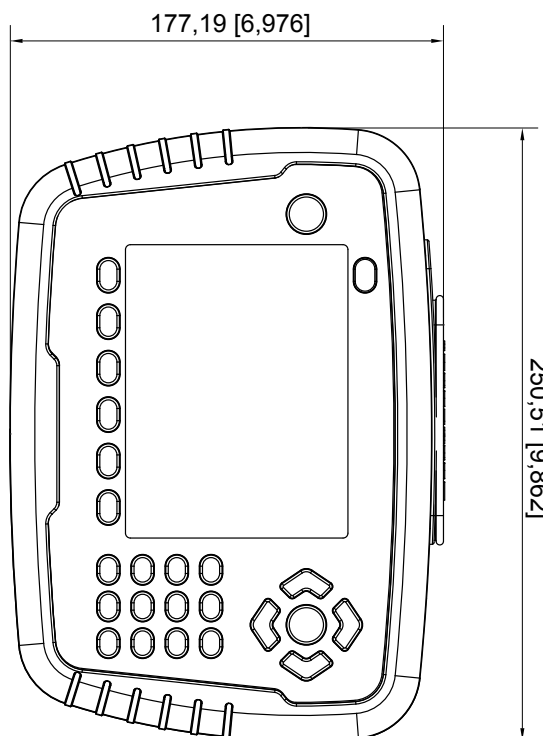


Display unit E52, Part No. 12-0700



Type of display/size	VGA 5.7" colour screen, backlit LED
Displayed resolution	0.001 mm / 0.05 thou
Internal battery	Heavy duty Li Ion chargeable
Temperature range	-10–50 °C [14–122 °F]
Connections	USB A, USB B, Easy-Laser® units, Charger
Communication	BT wireless technology
Internal memory	>100 000 measurements can be saved
Help functions	Calculator, Unit converter
Environmental protection	IP class 65
Housing material	PC/ABS + TPE
Dimensions	WxHxD: 250x175x63 mm [9.8x6.9x2.5"]
Weight	1020 g [2.3 lbs]

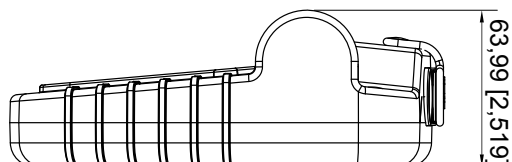

E290 Digital Precision Level, Part No. 12-0846




CE

UK


CA

Displayed resolution	OLED: 0.01 mm/m (0.001°)/App: 0.001 mm/m (0.001°)
Range	± 2 mm/m
Measurement accuracy	Range ±1 mm/m: accuracy within ±0.02 mm/m of displayed value. Range ±2 mm/m: accuracy within ±0.04 mm/m of displayed value.
Type of display	OLED
Communication	BT wireless technology
Environmental protection	IP Class 67
Operating temperature	-10–50 °C [14–122 °F]
Internal battery	Li ion
Material	Anodized aluminium , ABS plastics
Dimensions	WxHxD: 149x40x35 mm [5.9x1.6x1.4"]
Weight	530 g [18.7oz]


mm [inch]

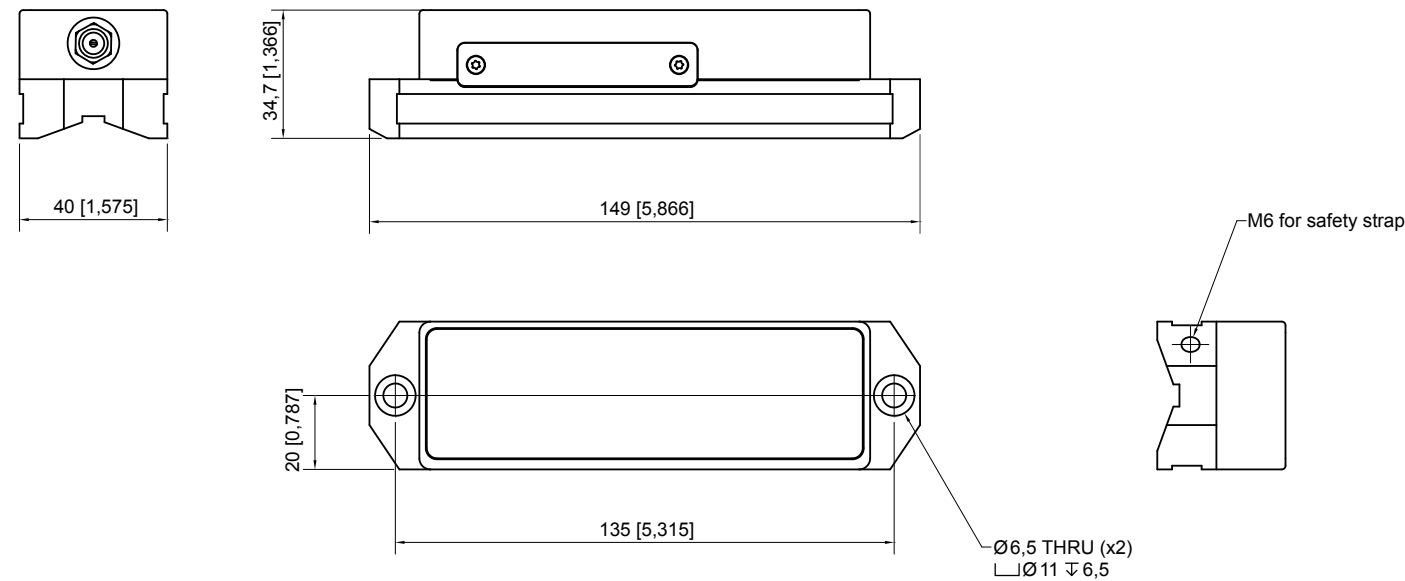

Extension kit for Precision Level, Part No. 12-0901




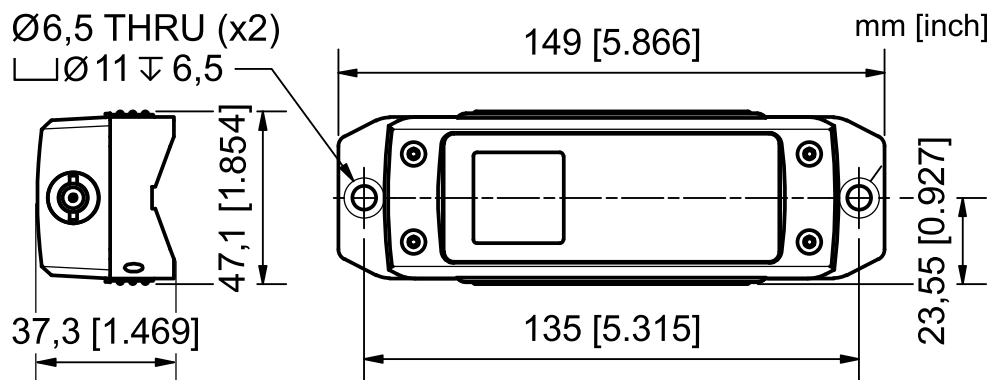
For diameters	55–800 mm [2.16–31.50"]
Material	Anodized aluminium , Stainless steel feet
Weight	430g [15.2 oz]

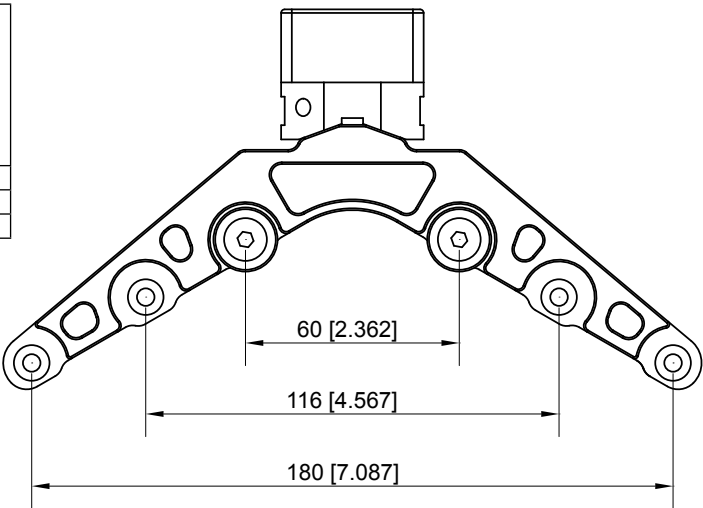


XT290 Digital Precision Level, Part No. 12-1241


mm [inch]

<div><div><div>CE</div><div>UK</div><div>CA</div></div></div>	
Displayed resolution	0.1, 0.01, 0.001 mm/m [mils/inch] 0.001, 0.0001, 0.00001 inch/foot
	10, 1, 0.1 arcsec
	0.01, 0.001, 0.0001 degree
Precision level range	±20 mm/m [±20 mils/inch] (pitch)
Precision level accuracy	±0.02 mm/m ±1% [±0.02 mils/inch ±1%]
Precision level sensitivity	0.001 mm/m [0.001 mils/inch]
Inclinometer range	±180° (pitch and roll)
Inclinometer accuracy	±0.2° (within range ±5°), ±1° (within range ±180°)
Type of display	TFT 240x240 pixels, RGB colour
Communication	BT wireless technology, 20 m [65'] range
Environmental protection	IP Class 66/67
Warning sensors	Temperature change and vibration
Operating temperature	-10–50 °C [14–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Operating time	Up to 20 h continuously
Internal battery	Li-Ion
Material	Corrosion resistant hardened steel, PC/ABS plastics
Dimensions	WxHxD: 149x37.3x47.1 mm [5.86"x1.47"x1.85"]
Weight	548 g [19.3 oz]





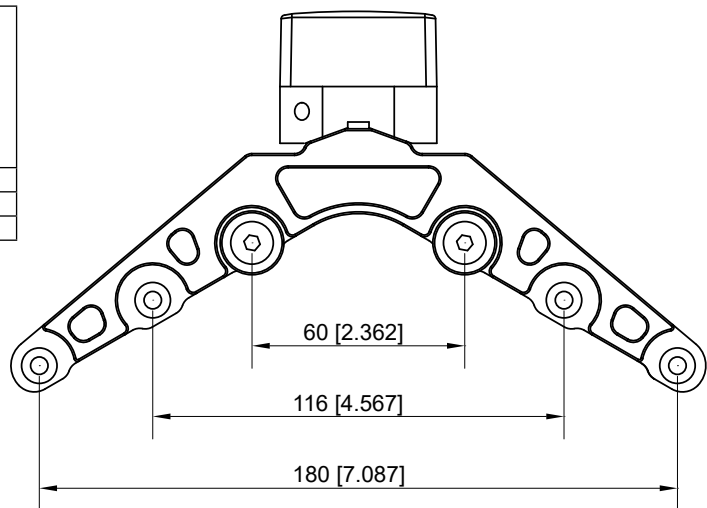


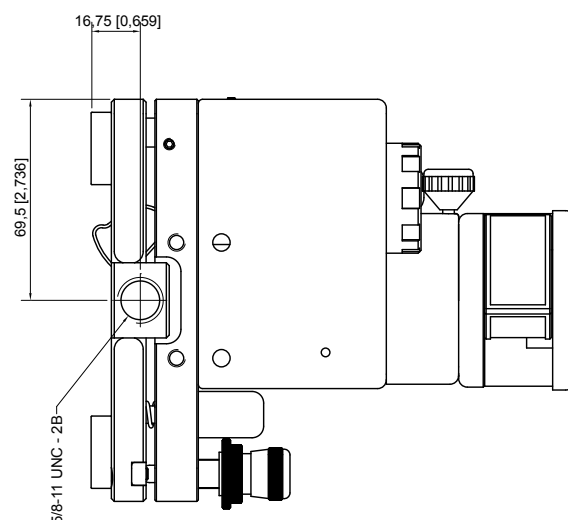
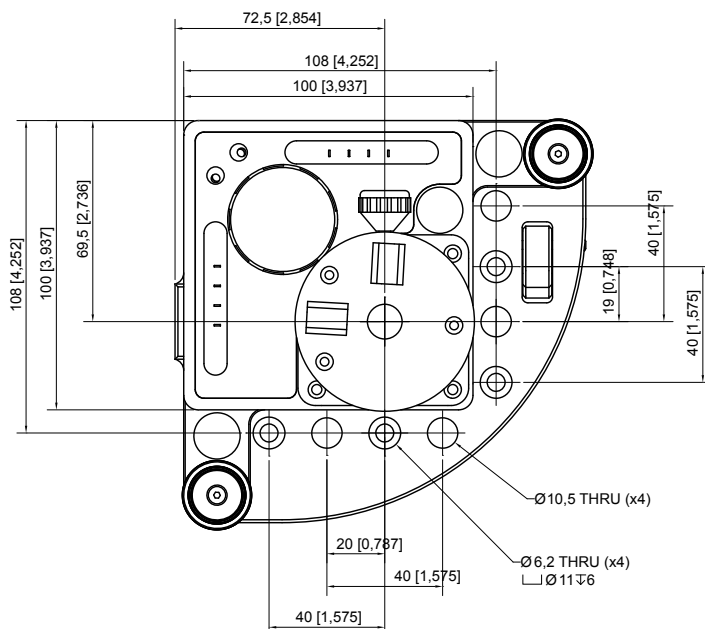
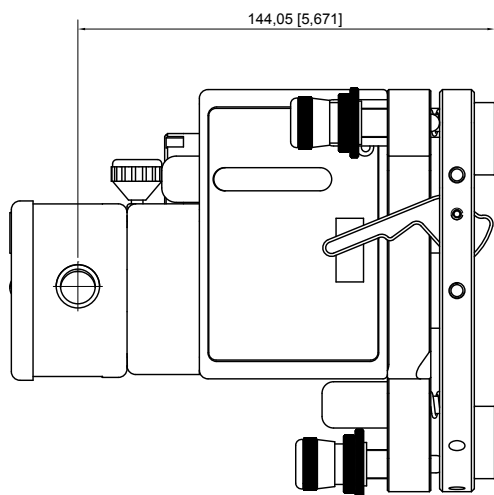
Extension kit for Precision Level, Part No. 12-0901

<div></div>	
For diameters	55–800 mm [2.16–31.50]
Material	Anodized aluminium , Stainless steel feet
Weight	430g [15.2 oz]



Laser transmitter D22, Part No. 12-0022

 <div>    <div> LASER 2 </div>  </div>	
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10-17 µs.
Beam diameter	6 mm [1/4"] at aperture
Working area, range	40 m radius [130"]
Type of battery	1 x R14 (C)
Operating time/battery	approx. 24 hours
Levelling range	± 30 mm/m [± 1.7°]
3 x spirit vials' scaling	0.02 mm/m
Squareness between laser beams	±0.01 mm/m [±0.01 mils/inch] [2 arc sec.]
Flatness of sweep	±0.01 mm/m
Fine turning of laser head	±0.1 mm/m [20 arc sec.]
2 x spirit vials for rotation of head	±5 mm/m
Housing material	Aluminium
Dimensions	WxHxD: 139x169x139 mm [5.47x6.64x5.47"]
Weight	2650 g [5.8 lbs]



mm [inch]

Laser transmitter D22, Part No. 12-0022



LASER
2




Examples of use

The D22 can be mounted in various ways. Below are just some examples. The important thing is to always tighten rods, screws and magnets firmly. Also be sure the surface where the magnets are attached is clean. If possible use the safety strap.




On tripod (Part No. 12-0269).

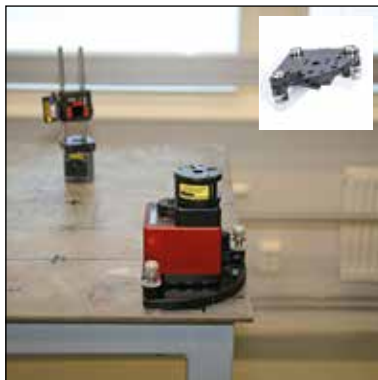


With super magnets on tilt table (included) directly on surface.



Feet with points (included), on non magnetic surface.

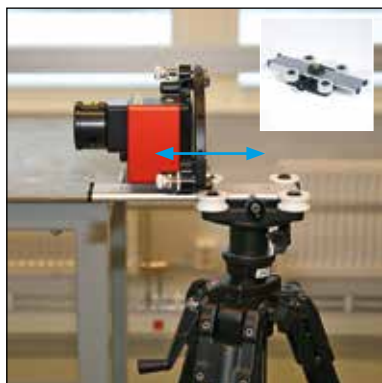


On sliding table for tripod Part No. 12-0202. For easy alignment to detector.

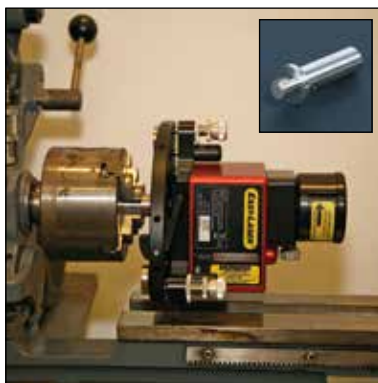


In a machine spindle. Spindle/magnet base pin Part No. 01-1333.




Vertical mounting on roll. Adapter plate Part No. 12-0874.

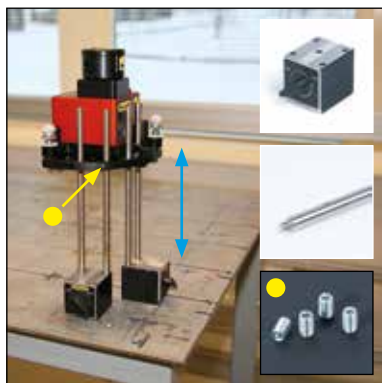


Rigid mounting, still easy to height adjust. Use rods of suitable length.

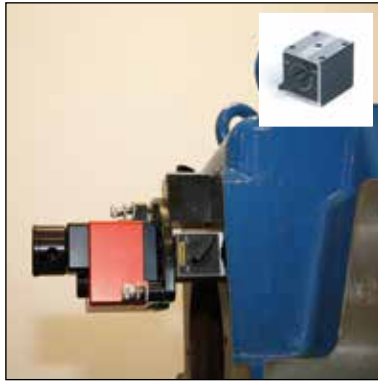

With magnet bases, very rigid mounting.

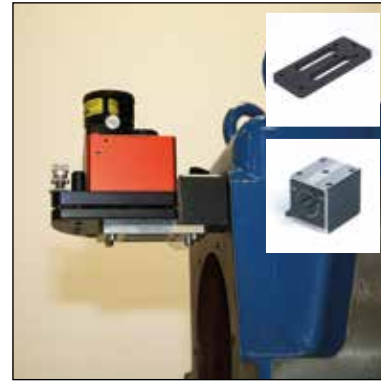

Rigid mounting, horizontal sweep.

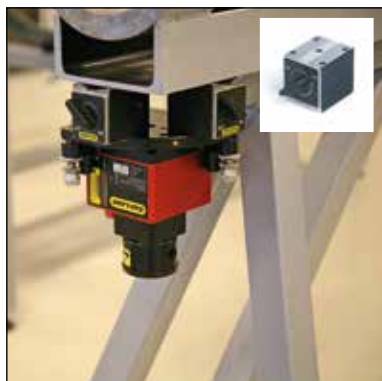

With magnet bases, very rigid mounting.

Tilting screws. The fine adjustment screw must not exceed its maximum position. That might damage the threads of the screw.

Fine adjustment screw

Course screw

Locking screw

Maximum position

Laser transmitter D23 Spin, Part No. 12-0168




CE


UK
CA






LASER
2

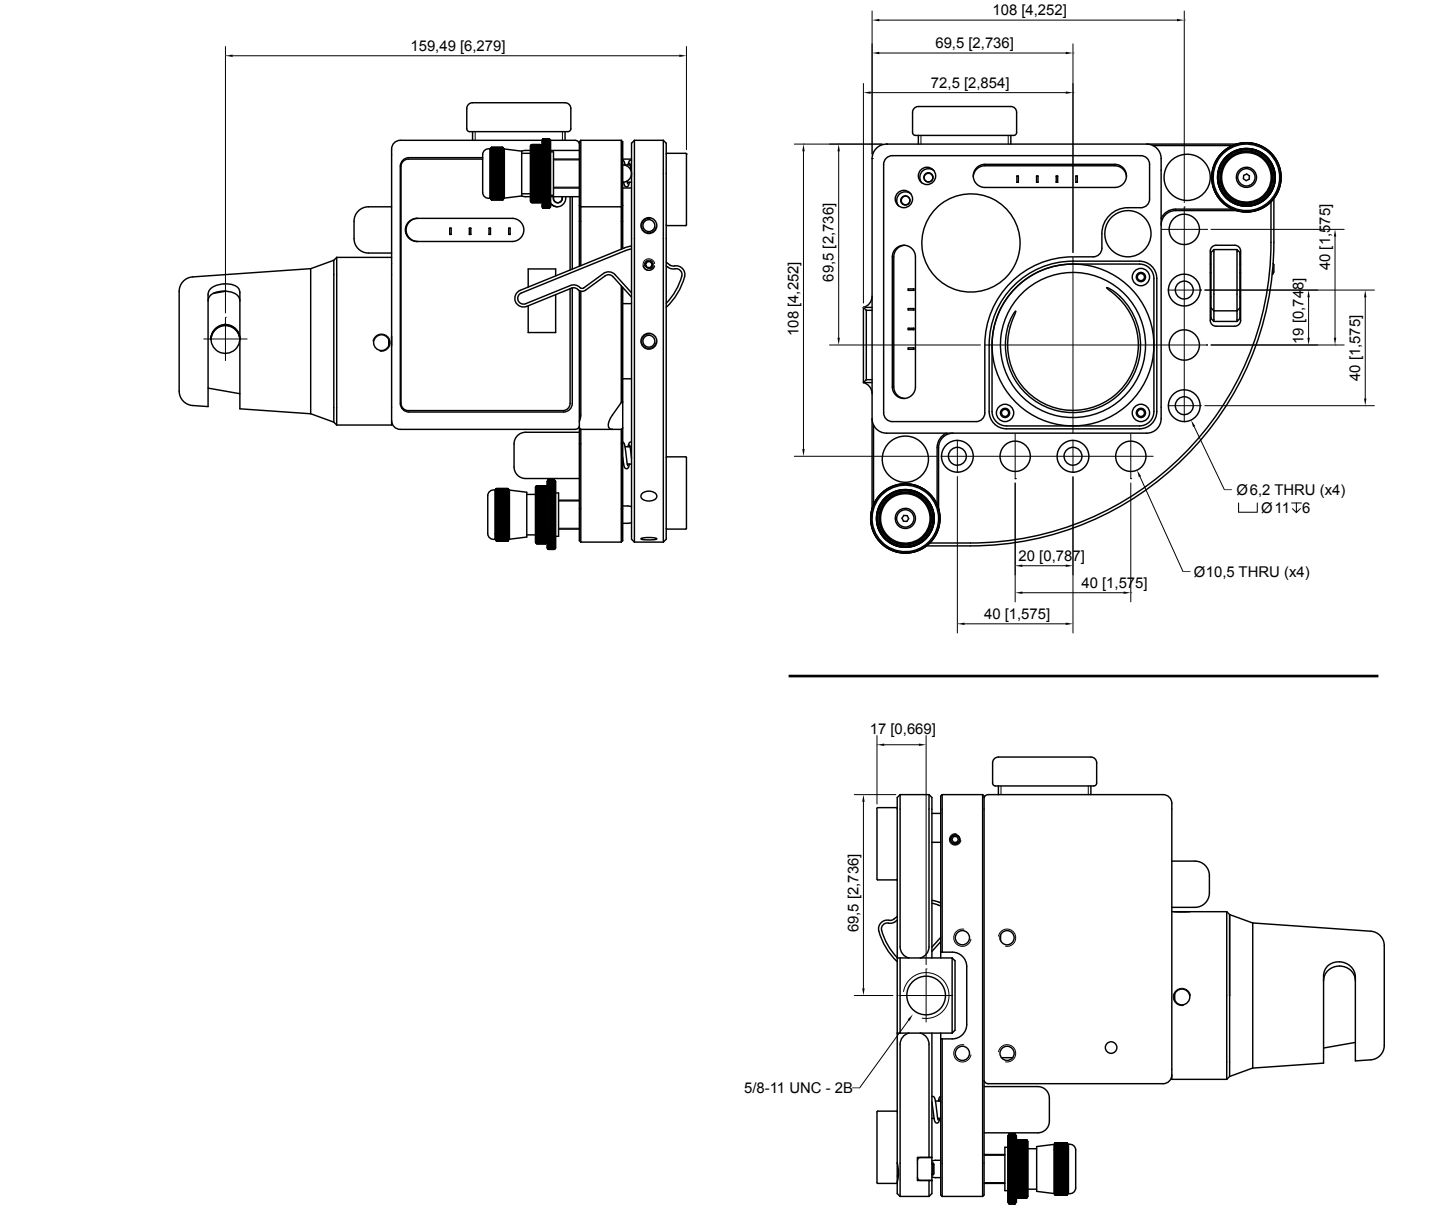


Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 1 mW. PULSE ENERGY 2-9 µJ (spin mode) or < 20 nJ (stationary mode). PULSE DURATION 2-9 ms (spin mode) or 10-17 µs (stationary mode).
Beam diameter	6 mm [1/4"] at aperture
Working area, range	20-metre radius [65']
Type of battery	2 x R14 (C)
Operating time/battery	approx. 15 hours
Operating temperature	0–50 °C
Levelling range	± 30 mm/m [± 1.7°]
3 x spirit vials' scaling	0.02 mm/m
Flatness of sweep	0.02 mm/m
Housing material	Aluminium
Dimensions	WxHxD: 139x169x139 mm [5.47x6.64x5.47"]
Weight	2650 g [5.8 lbs]








Laser transmitter D75, Part No. 12-0075
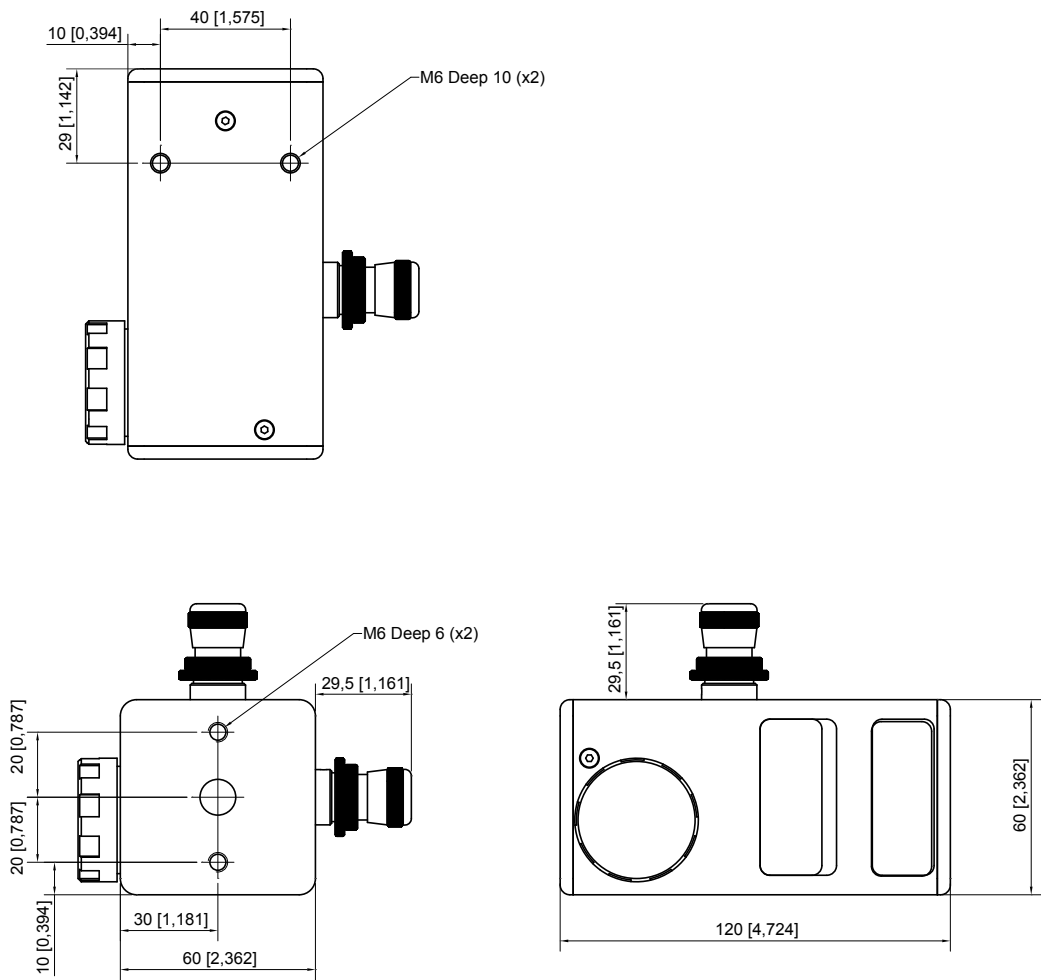
<div><div><div>CE</div><div>UK</div><div>CA</div></div><div>LASER 2</div></div>	
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10–17 µs.
Beam diameter	6 mm [1/4"] at aperture
Working distance	40-metre [130']
Type of battery	1 x R14 (C)
Operating time/battery	approx. 15 hours
Operating temperature	0–50 °C [32–122 °F]
Laser adjustment	D75: 2 ways ±2° (± 35 mm/m)
Housing material	Aluminium
Dimensions D75	WxHxD: 60x60x120 mm [2.36x2.36x4.72"]
Weight	780 g [27.5 oz]


mm [inch]








Laser transmitter D25 with offset hub, Part No. 12-0706


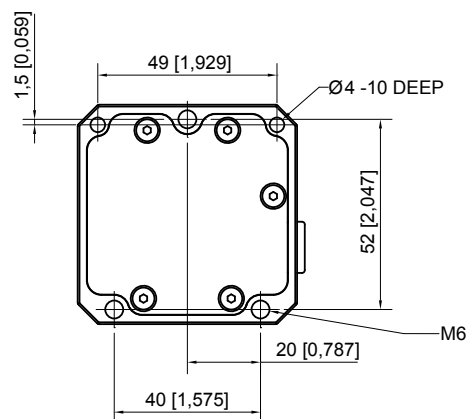
 <div>    <div> LASER 2 </div>  </div>	
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10-17 µs.
Beam diameter	6 mm at aperture [1/4"]
Measurement range	40 m radius [130']
Battery type	1 x 1.5 V R14 (C)
Operating time / battery	>24 hours
Levelling range	±1.7° (±30 mm/m) in two directions [±30 mils/inch]
Perpendicularity between beams	2 arc sec. (0.01 mm/m) [0.5 mils/inch]
Flatness of sweep	±0.01 mm/m (10µ)
Housing material	Anodised aluminium
Dimensions (transmitter down)	137x137x142 mm [5.4x5.4x5.6"]
Dimensions (transmitter up)	137x137x150 mm [5.4x5.4x5.9"]
Weight	2124 g (battery adaptor excluded) [4.7 lbs]

mm [inch]





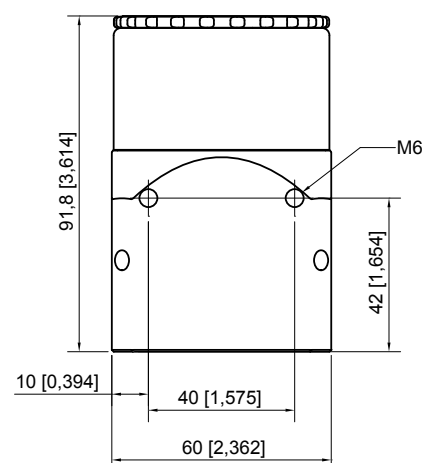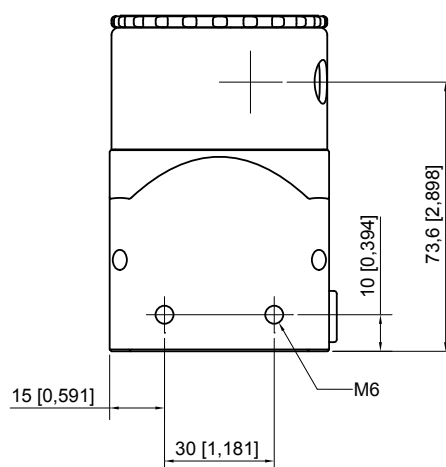


Laser transmitter D25, Part No. 12-0594


 <div>    <div> LASER 2 </div>  </div>	
---	--








Laser transmitter E30 Long range, Part No. 12-0823



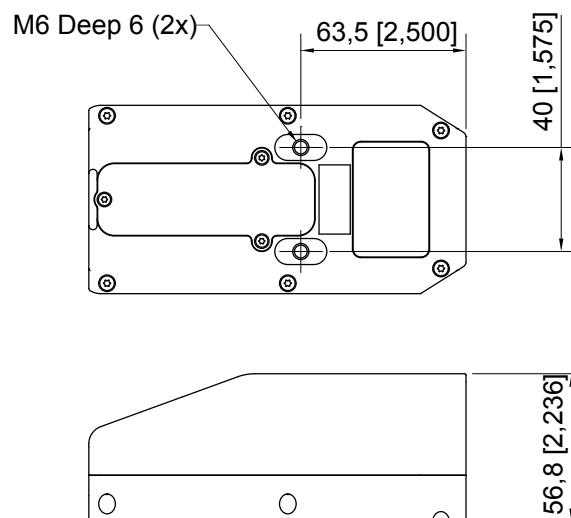
 <div>    <div> LASER 2 </div>  </div>	
Laser	Diode laser
Laser wave length	630–680 nm
Adjustable modulation	0, 5, 32, 40, 100 KHz
Output power	AVERAGE POWER < 1 mW. PULSE ENERGY < 12-132 nJ (pulsed mode). PULSE DURATION 10-110 us (pulsed mode).
Beam diameter	12 mm (1/2") at aperture
Working area with 20mm detector	0–100 meter [328 ft]
Working area with 30mm detector	0–>200 meter [656 ft]
Type of battery	Li Ion
Operating time	>24 h
Operating temperature	-10–50 °C [14–122 °F]
Environmental protection	IP67
Wireless communication	BT wireless technology (passive). Contains FCC ID: PVH0946, IC: 5325A-0946.
Chock sensor	6 axis mems gyro with inclinometer
Type of display	0-led 96x96 pixel
Charging power	5–12 V DC
Housing material	Anodized aluminium T6060
Dimensions	WxHxD: 145.0x72.4x56.8 mm [5.71x2.85x2.24"]
Weight	620g [21.7 oz]

mm [inch]



Laser transmitter E30 Long range, with tilt table, Part No. 12-0858

 <div>    <div> LASER 2 </div>  </div>	
---	--

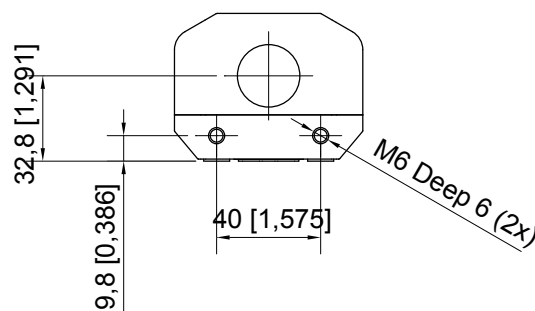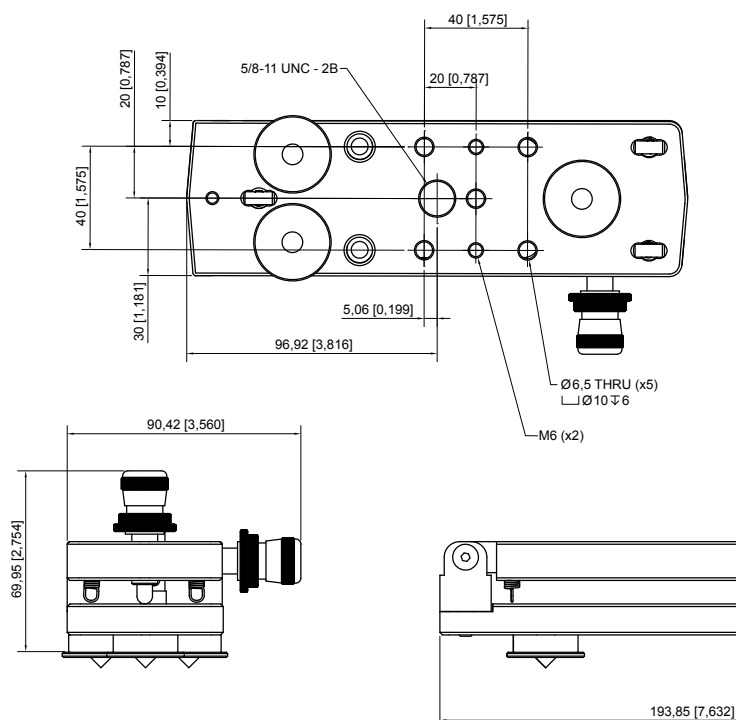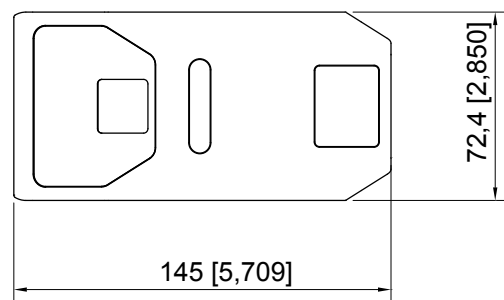

Laser transmitter XT20, Part No. 12-1272







LASER
2



mm [inch]

Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10–17 µs.
Beam diameter	6 mm [0.24"] at aperture, 13 mm [0.51"] at 40 m [132']
Working range	20 m radius [66']
Communication	BT Wireless technology, 40 m [130'] range. Contains FCC ID: Q0QBGM13P, IC: 5123A-BGM13P. NCC Taiwan ID: CCAM18LP1260T0.
Warning indications	Temperature drift and shake/vibration
Connections	Charger
Type of battery	Heavy duty Li-Ion chargeable
Operating time	Up to 30 hours continuous use
Warmup time	15 min
Operating temperature	-10–50 °C [14–122 °F]
Charging temperature (battery)	0–50 °C [32–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95% non-condensing
Number of precision levels	2 pcs Horizontal
Precision level range	± 10 mm/m [± 10 mils/inch]
Precision level accuracy	± 0.02 mm/m ± 1% [± 0.02 mils/inch ± 1%]
Precision level sensitivity	0.001 mm/m [0.001 mils/inch]
Laser plane flatness	± 0.01 mm/m [± 0.01 mils/inch]
Laser head fine turning	1:132 gear ratio
Environmental protection	IP55, designed for outdoor use (pollution deg. 4)
TFT display	240x240 pixels, RGB colour
Housing material	Anodized aluminium + PC/ABS + TPU
Dimensions	WxHxD: 147x126x152 mm [5.79x4.97x5.98"]
Weight	2065 g [72.86 oz]

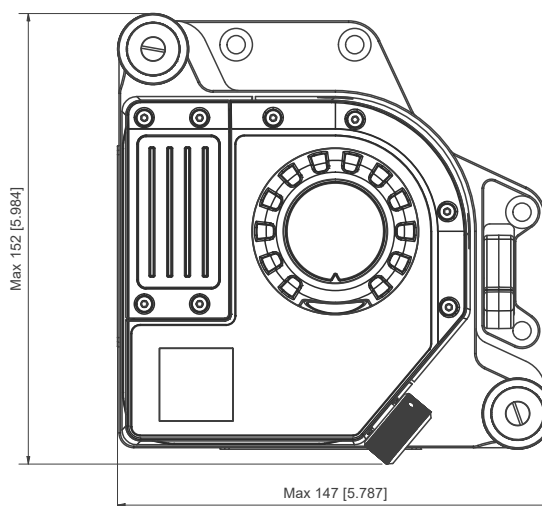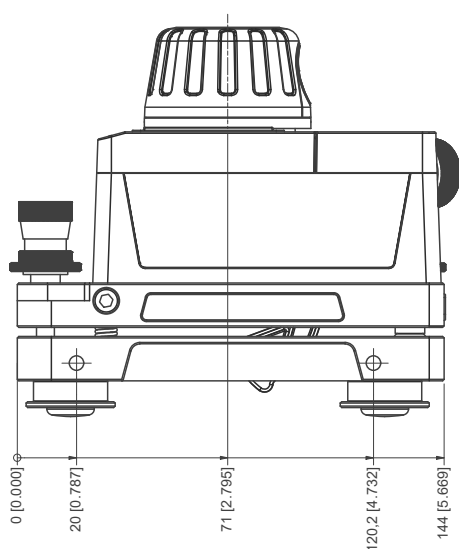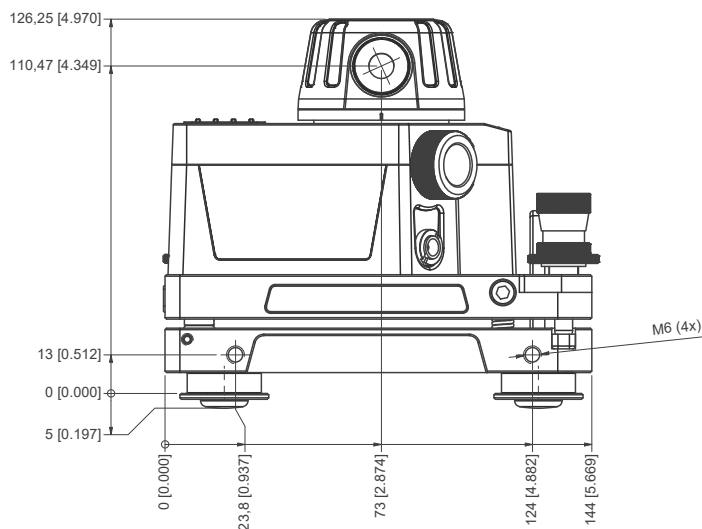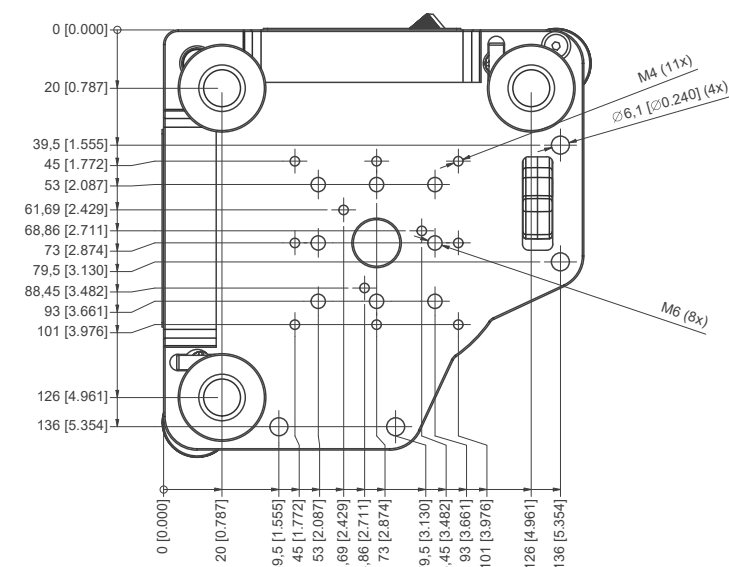

Laser transmitter XT22, Part No. 12-1273







LASER
2



mm [inch]

Type of laser	Fiber-coupled diode laser
Laser wavelength	630–680 nm
Laser Safety Class	Class 2
Output power	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10–17 µs.
Beam diameter	6 mm [0.24"] at aperture, 13 mm [0.51"] at 40 m [132']
Working range	40 m radius [132']
Communication	BT Wireless technology, 40 m [130'] range. Contains FCC ID: Q0QBGM13P, IC: 5123A-BGM13P. NCC Taiwan ID: CCAM18LP1260T0.
Warning indications	Temperature drift and shake/vibration
Connections	Charger
Type of battery	Heavy duty Li-Ion chargeable
Operating time	Up to 30 hours continuous use
Warmup time	15 min
Operating temperature	-10–50 °C [14–122 °F]
Charging temperature (battery)	0–50 °C [32–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95% non-condensing
Number of precision levels	2 pcs Horizontal, 1 pc Vertical
Precision level range	± 10 mm/m [± 10 mils/inch]
Precision level accuracy	± 0.02 mm/m ± 1% [± 0.02 mils/inch ± 1%]
Precision level sensitivity	0.001 mm/m [0.001 mils/inch]
Laser plane flatness	± 0.01 mm/m [± 0.01 mils/inch]
Squareness between laser beams	± 0.01 mm/m [± 0.01 mils/inch]
Laser head fine turning	1:1320 gear ratio
Environmental protection	N/A. Designed for industrial use (pollution degree 3).
TFT display	240x240 pixels, RGB colour
Housing material	Anodized aluminium + PC/ABS + TPU
Dimensions	WxHxD: 147x136x152 mm [5.79x5.35x5.98"]
Weight	2264 g [79.86 oz]

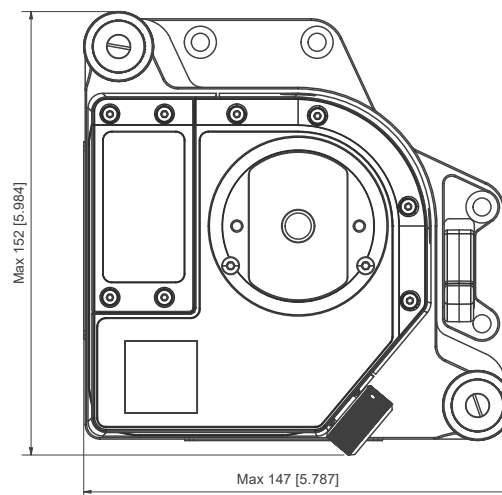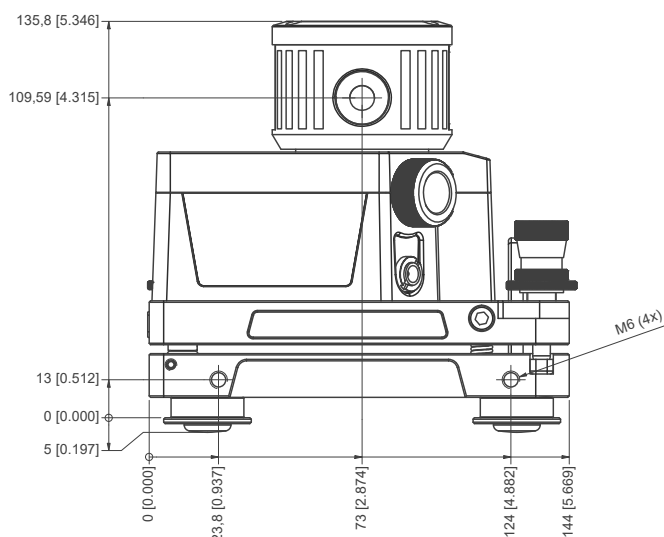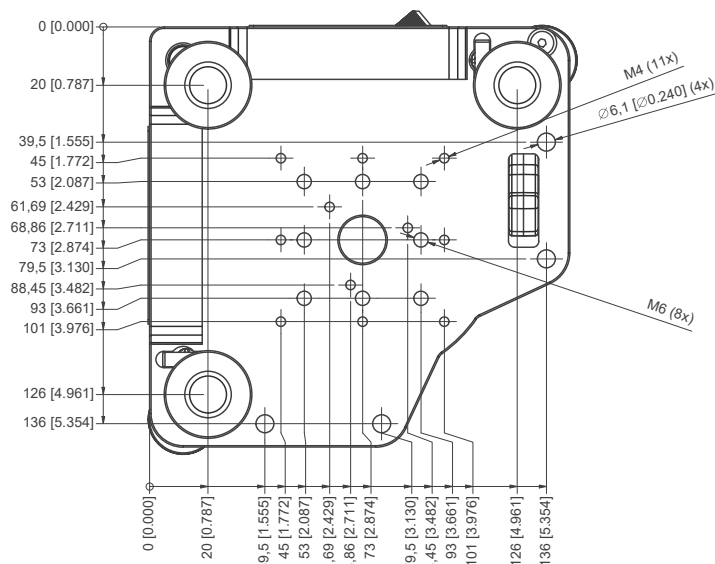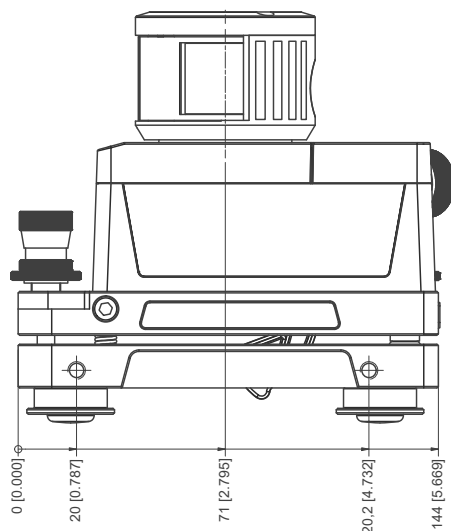

Mounting possibilities for XT20/XT22 and Multi-bracket









A/B: Use the Multi-bracket as adapter for mounting on tripod, vertically or horizontally.

C: Use it to mount the transmitter vertically on a magnet base.

D: The three super magnets can be mounted at many different positions, making it possible to also place the transmitter on a small surface, when needed. Here are three examples shown.



E: Use rods on regular magnet bases to position the transmitter at required height. For example when you need to place the transmitter on a lower position than the surface to be measured.

F: Mount one or two magnet bases directly on the tilt table.

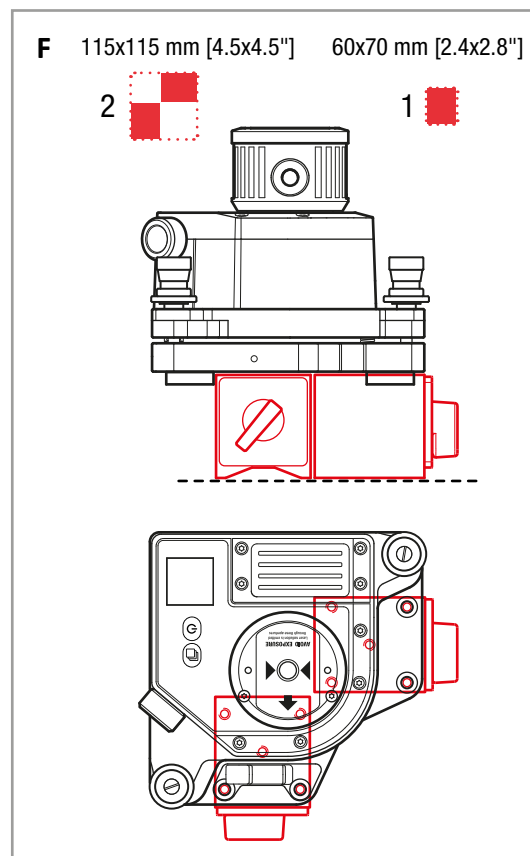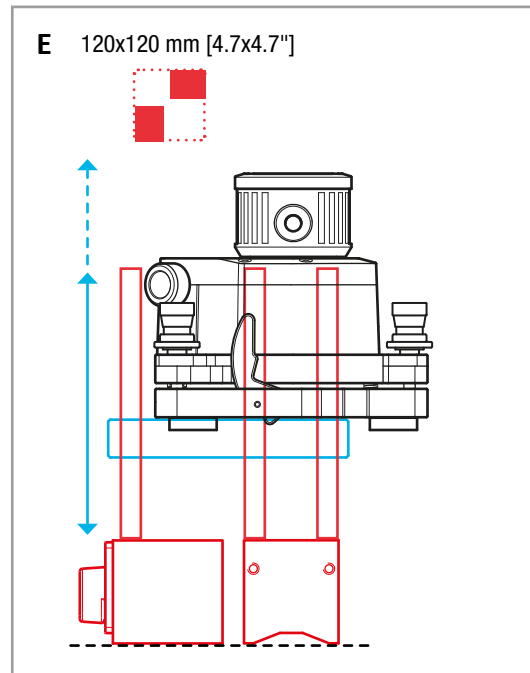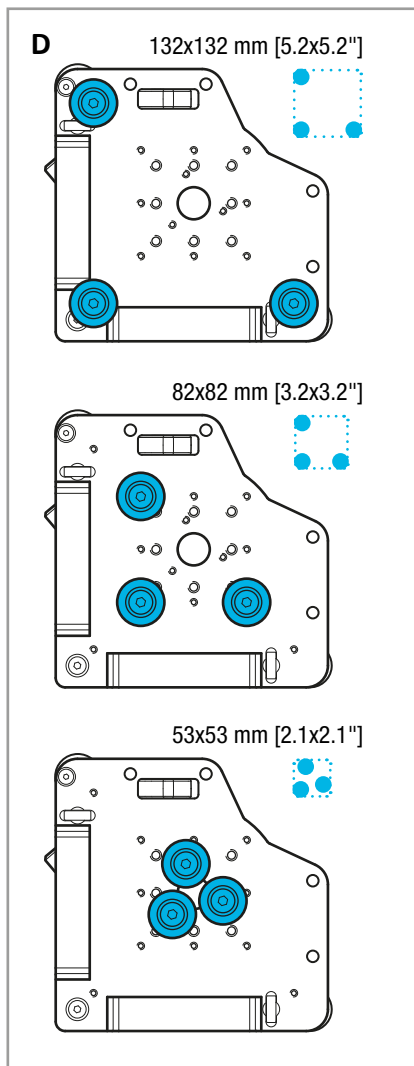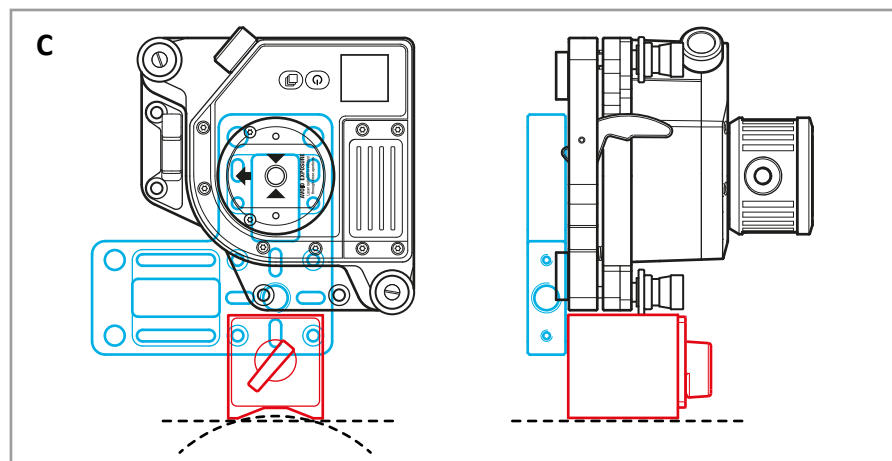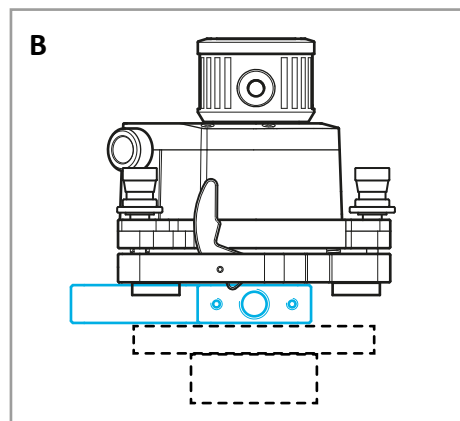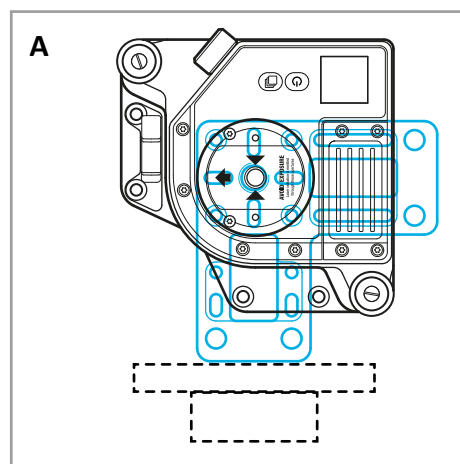


Technical drawing of a vertical rod with the following dimensions and callouts:

- 5/8-11 UNC - 2B (3x)
- M6x1 - 6H (4x)
- 50 [1.969]
- 30 [1.181]
- 10 [0.394]
- 0 [0.000]
- 10 [0.394]

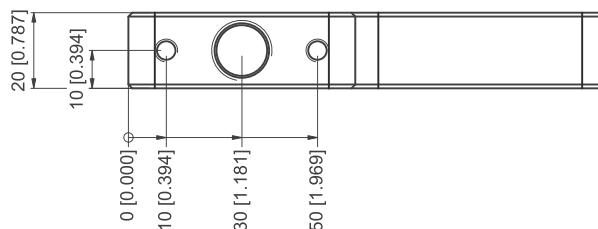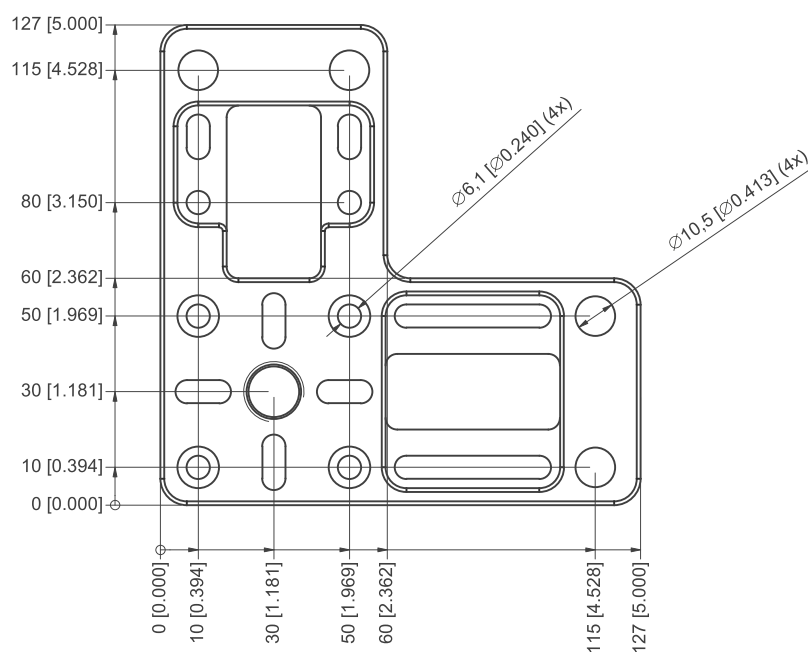


Magnet base, Part No. 12-0013

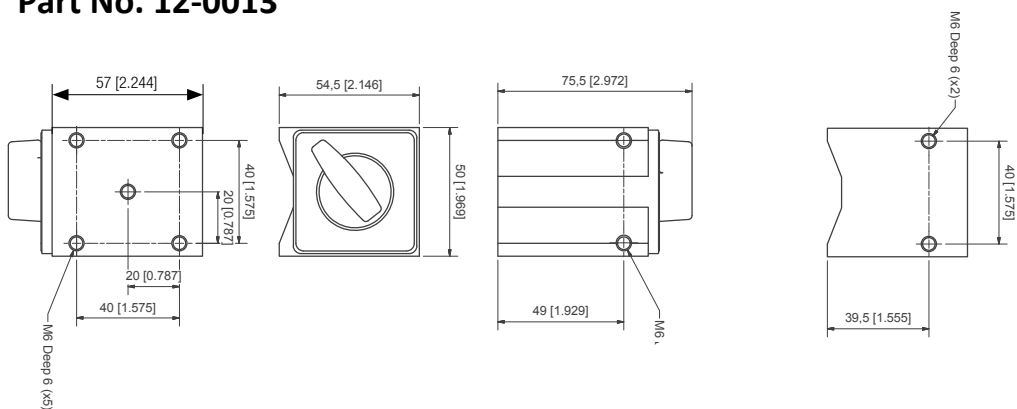


mm [inch]


Magnet base with turnable head, Part No. 12-0045




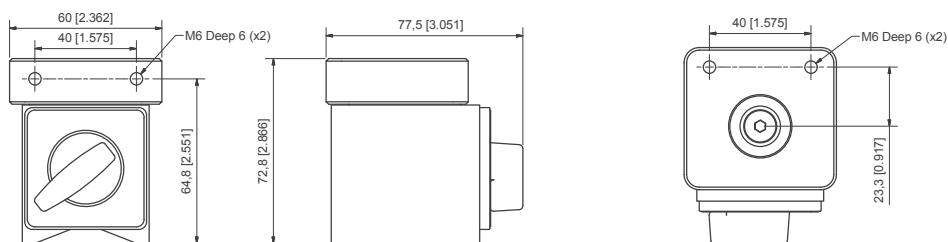


Magnet base with turnable head, Part No. 12-1133

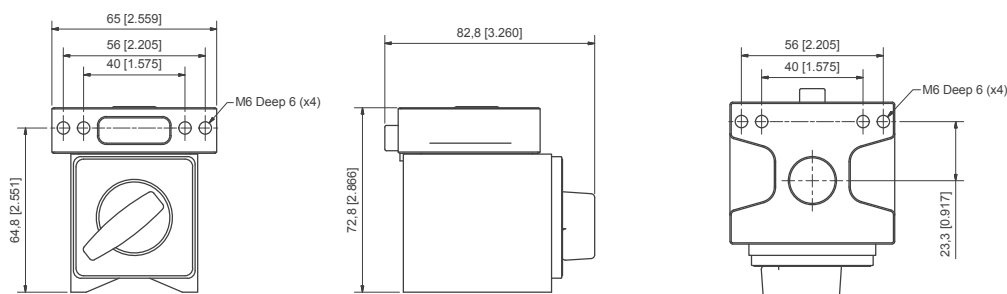


Small magnet base with turnable head, Part No. 12-0696

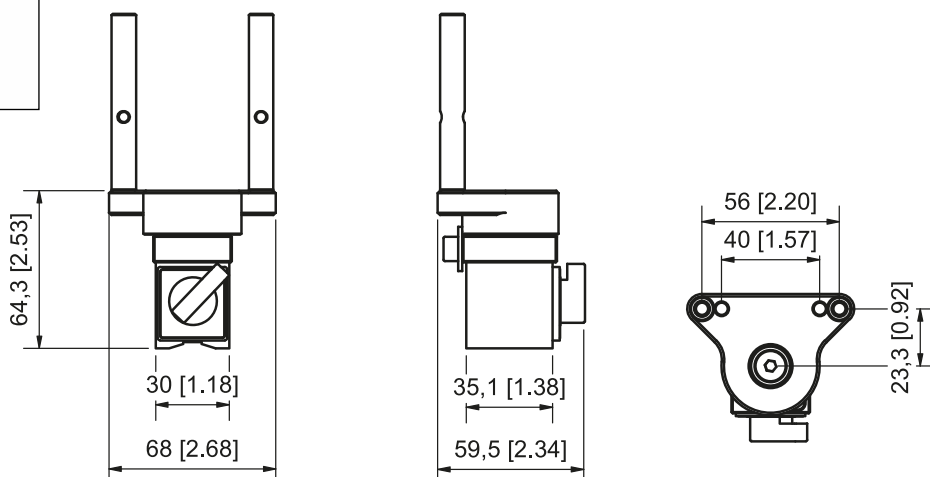

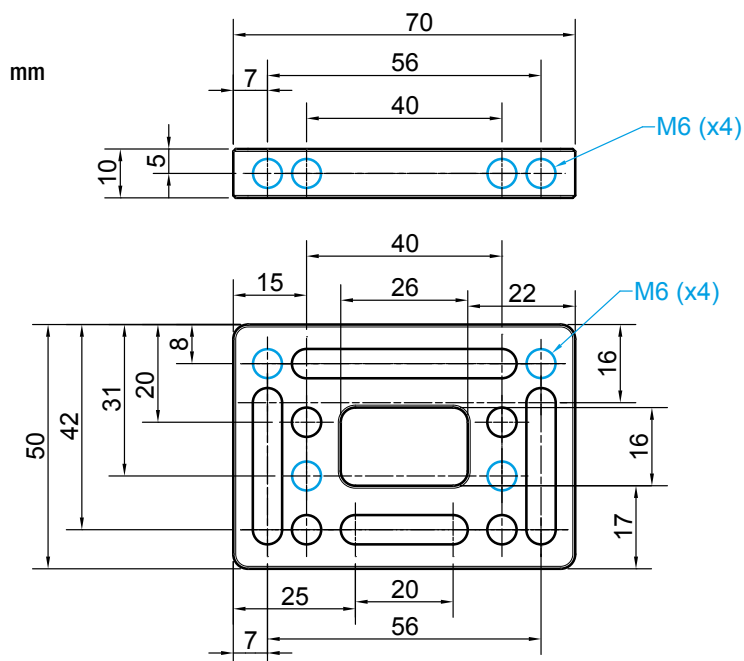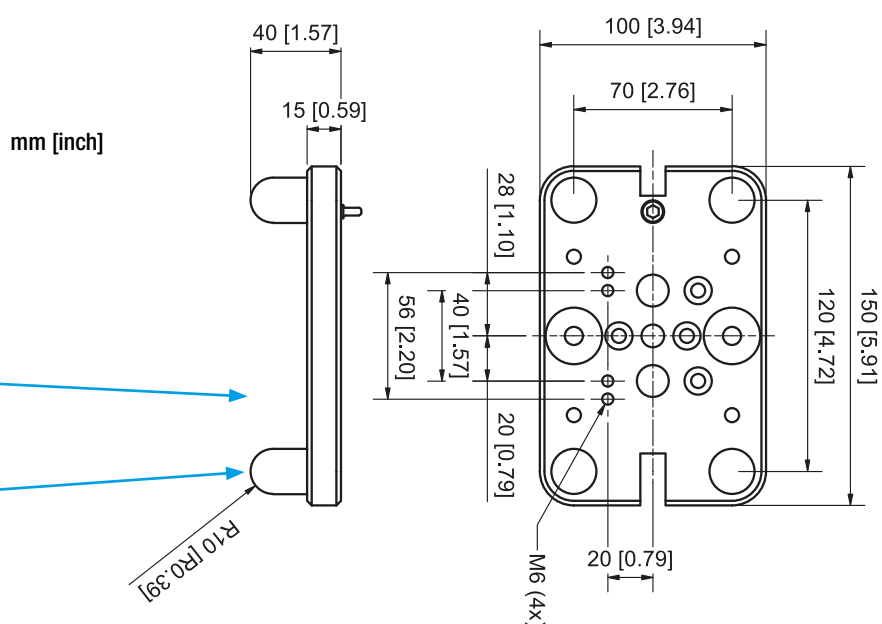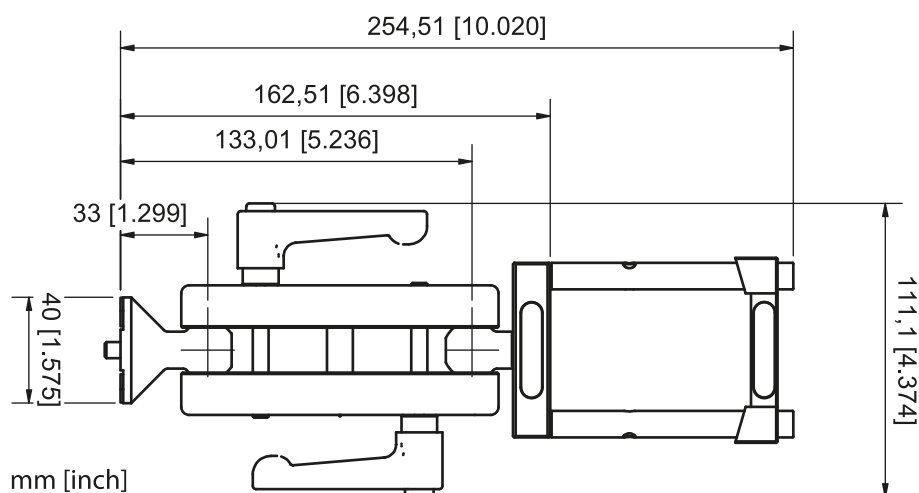

12-1277 (for XT-series)

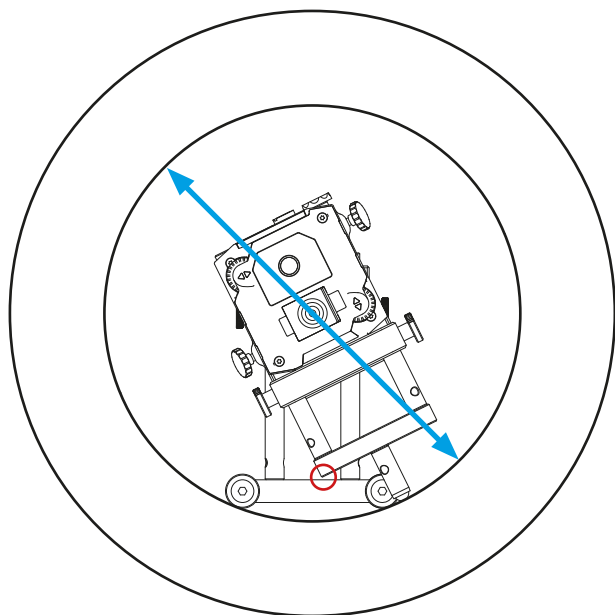


Min. \varnothing 220 mm [8.67"]

Note: This bracket can be assembled in many different ways, and used also with magnet base, magnetic bracket, etc. Then the minimum measurable diameters are other than specified here. Please consult your local distributor for more information.



○ = possible interference point for minimum diameters.

12-1282 (for E-series)

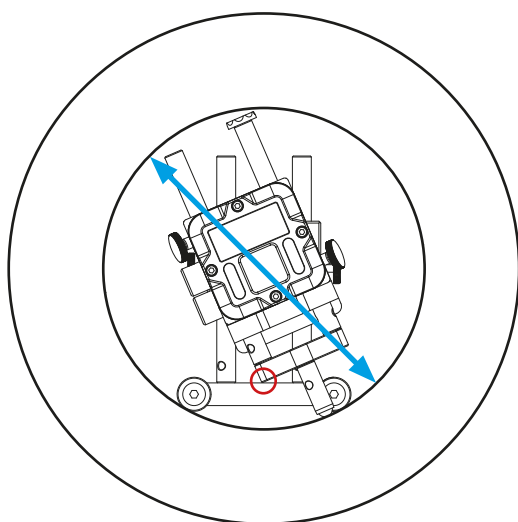

Min. \varnothing 170 mm [6.70"]

Note: This bracket can be assembled in many different ways, and used also with magnet base, magnetic bracket, etc. Then the minimum measurable diameters are other than specified here. Please consult your local distributor for more information.






12-0455 Slide bracket Small




12-0543 Slide bracket Medium

12-0510 Slide bracket Large




12-0455

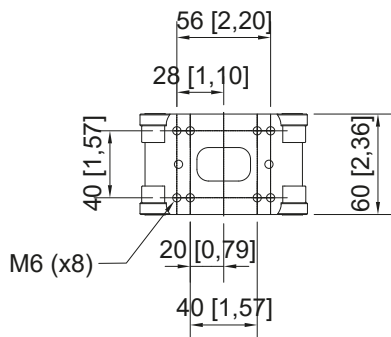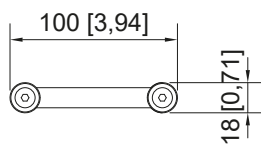


12-0543

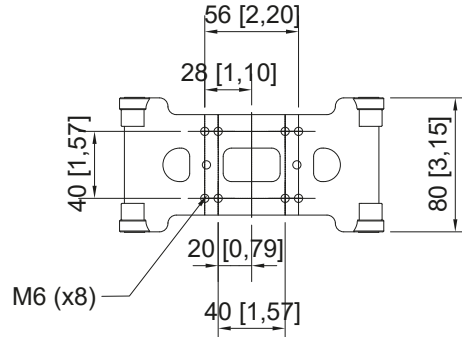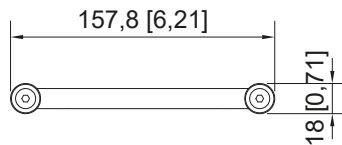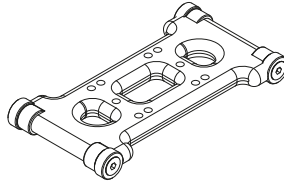


12-0510

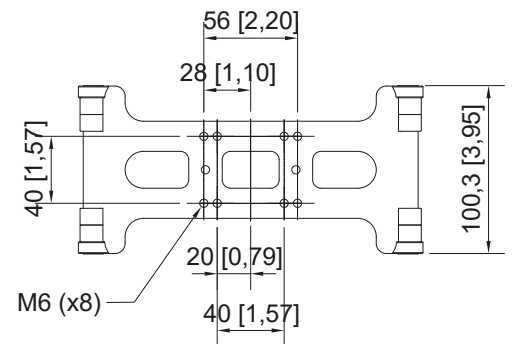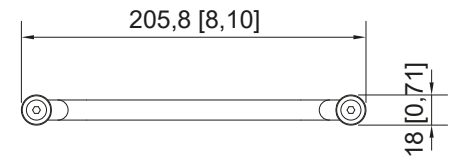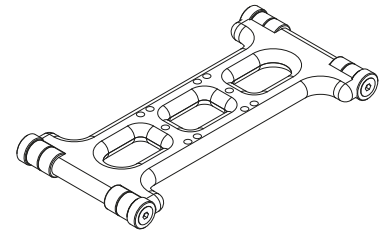


When used with XT70-M:

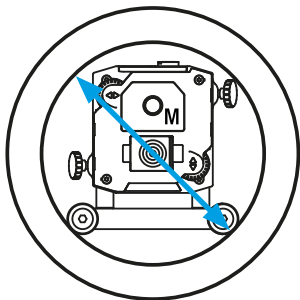

Min. Ø 130 mm [5.12"]

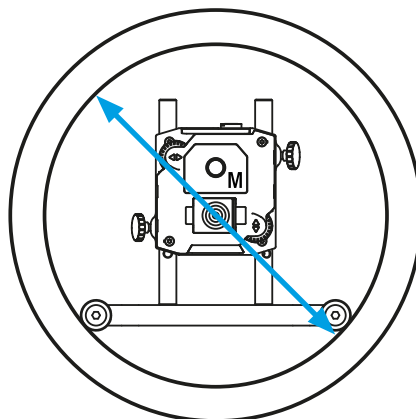

Min. Ø 200 mm [7.87"]




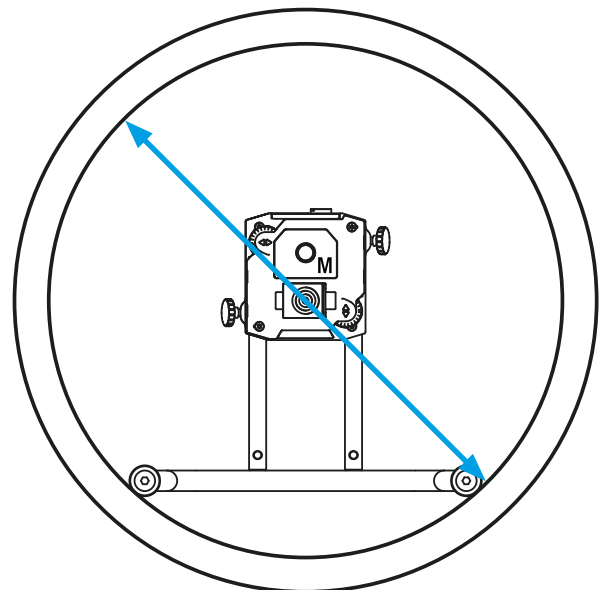


Min. Ø 300 mm [11.81"]

Angular prism, Part No. 12-1136



Turning range	360°
Fine turning	0.1 mm/m [20 arc sec.]
Parallelism accuracy	$\pm 0.005 \pm 0.002/M$ mm/m [$\pm 0.005 \pm 0.007/F$ mils/inch] *
	* M is the measurement range in meters [m]. F is the measurement range in feet [ft].
Aperture size	18 mm [3/4"]
Knob and rod material	Stainless steel
Housing material	Anodized aluminium
Weight (with detector bracket)	860 g [1.9 lbs]

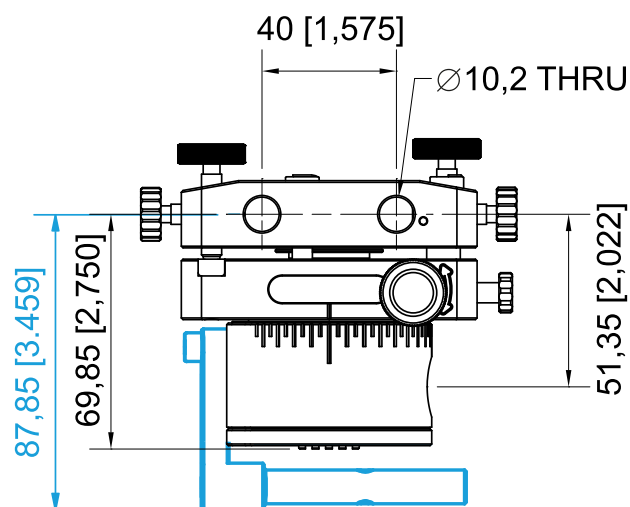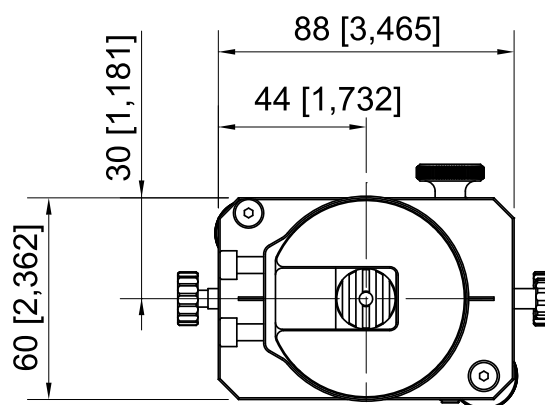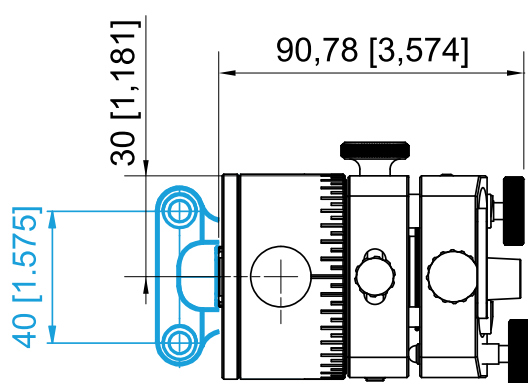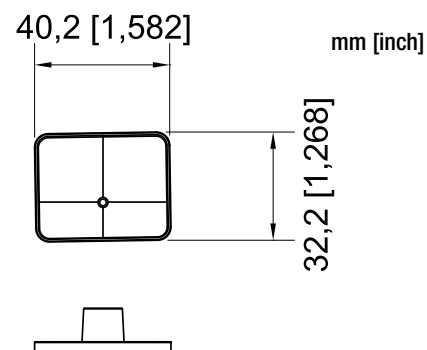

Miscellaneous



Wireless unit Version 1, Part No. 12-0436

Communication	BT wireless technology
Operating temperature	-10–50 °C [14–122 °F]
Environmental protection	IP class 66 and 67
Housing material	ABS
Dimensions	WxHxD: 53x32x24 mm [2.1x1.2x0.9"]
Weight	25 g [0.9 oz]

The unit for wireless communication, Part No. 12-0436, is replaced by a new product in November 2022 with new Part No. 12-1336. The new product has been updated with new electronics which affects backwards compatibility. The new unit has also got a new UKCA (UK Conformity Assessed) marking on the label.

The unit for wireless communication is used with detectors and measuring units in the E-series, namely 12-0509 (E5)/12-0702 (E4)/12-0752 (E7)/12-0434 (EM)/12-0433 (ES)/12-0790 (EMH)/ 12-0789 (ESH), 12-0824 (E7H).

Note! The new wireless unit 12-1336 which has the UKCA mark on the label only works with above mentioned detectors and measuring units which also have the UKCA mark, except for the 12-0509 (E5) detector with which the new wireless unit 12-1336 is compatible. If replacing an old wireless unit to use with other products than E5 detector, you must make sure to order a 12-0436 unit (available as spare part). If, for some reason, you need to use the new wireless unit 12-1336 with an existing detector or measurement unit delivered before November 2022 (except for E5), you may also need to upgrade the measuring unit/detector. In such an event, please contact your local distributor for advice before ordering a new wireless unit.



Wireless unit Version 2, Part No. 12-1336

Communication	BT wireless technology ESP32-MINI-1
Operating temperature	-10–50 °C [14–122 °F]
Environmental protection	IP class 66 and 67
Housing material	ABS
Dimensions	WxHxD: 53x32x24 mm [2.1x1.2x0.9"]
Weight	25 g [0.9 oz]






Vibrometer probe XT280, Part No. 12-1090 (system)

Frequency range	2 Hz to 1 kHz (ISO) 1 kHz to 10 kHz (BDU)
Max frequency resolution	1.25 Hz @ 800 lines FFT setting
Displayed amplitude units	Acceleration in g Velocity in mm/s (or inch/s) Bearing noise in BDU (bearing damage units)
Displayed Frequency Units	Hertz (Hz), RPM or CPM
Input range	User selectable with accelerometer sensitivity
Dynamic range	96 dB (0.01g resolution)
VA diagnostic bands (RPM=run speed)	Unbalance 1x RPM Alignment 2x RPM Looseness 3x RPM
Operating temperature	0°C to 50°C [32–122 °F]
Storage temperature	-20–70 °C [-4–158 °F]
Battery type	2 x AA batteries
Battery operation	20 hours continuously (depending on brightness setting)
Environmental protection	IP67
Material	ABS plastics / Hard anodized aluminium
Dimensions	WxHxD: 200 mm x 60mm x 26mm [7.8 x 2.4 x 1.0"]
Weight	280 g [9.8 oz]




Detector E9, Part No. 12-0759




Wireless communication	BT wireless technology.
Type of detector	2 axis PSD 20x20 mm [0.78" sq]
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±1µm ±1%
Thermal sensor	± 1° C accuracy
Environmental protection	IP class 67
Internal battery	Li Ion
Protection	No influence from ambient light
Housing material	Anodized aluminium
Dimensions	Ø 45 mm [1.77"], length 100 mm [3.94"]
Weight	180 g [6.3 oz]

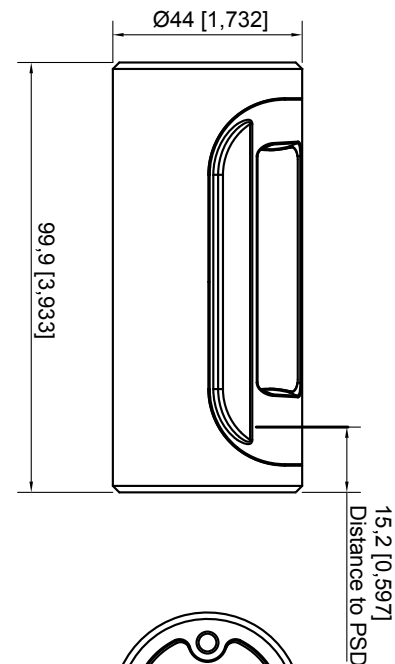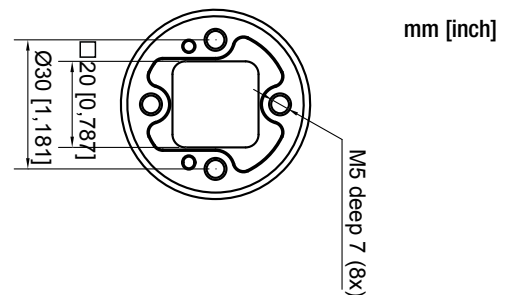

Detector E3, Part No. 12-0799

<div><div><div>CE</div><div>UK</div><div>CA</div></div></div>	
Wireless communication	BT wireless technology
Type of detector	2 axis PSD 30x30 mm [1.18" sq]
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±1µm ±1%
Thermal sensor	± 1° C accuracy
Environmental protection	IP class 65
Internal battery	Li Ion
Protection	No influence from ambient light
Housing material	Anodized aluminium
Dimensions	WxHxD: 69x65x49 mm [2.7x2.6x1.9"]
Weight	262 g [9.2 oz]

mm [inch]

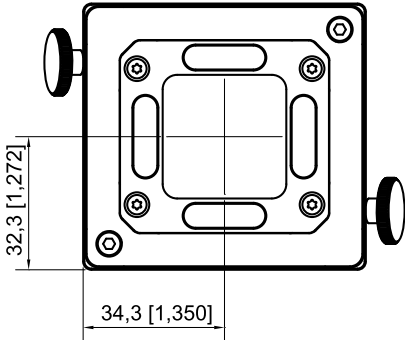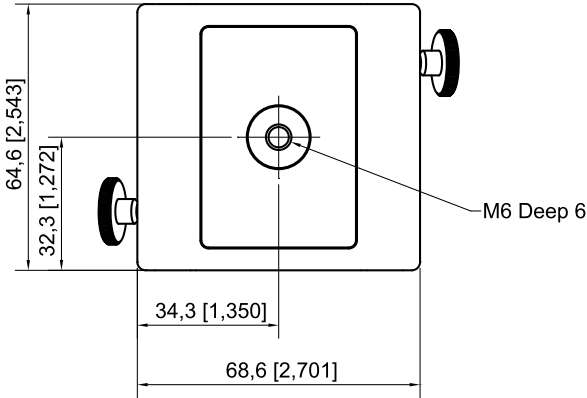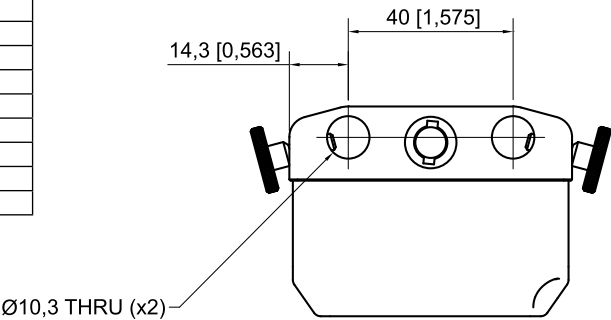


Detector E7, Part No. 12-0752



mm [inch]

Detector E7, Part No. 12-0752

Type of detector	2 axis PSD 20x20 mm [0.78" sq]
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	$\pm 1\mu\text{m} \pm 1\%$
Inclinometers	0.1° resolution
Thermal sensors	$\pm 1^\circ\text{C}$ accuracy
Environmental protection	IP Class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Internal battery	Li Ion
Housing material	Anodized aluminium
Dimensions	WxHxD: 60x60x42 mm [2.36x2.36x1.65"]
Weight	186 g [6.6 oz]

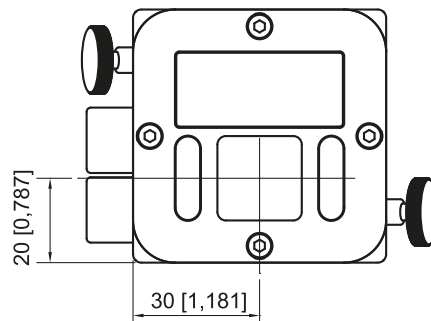


Detector E5, Part No. 12-0509



Detector E5, Part No. 12-0509

Type of detector	2 axis PSD 20x20 mm [0.78" sq]
Dual Detection Technology™	Can detect both spinning and stationary laser beam, but is optimised for spinning laser.
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	Spin $\pm 10\mu\text{m} \pm 1\%$ / Stationary beam $\pm 10\mu\text{m} \pm 2\%$
Inclinometers	0.1° resolution
Thermal sensors	$\pm 1^\circ\text{C}$ accuracy
Environmental protection	IP Class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Internal battery	Li Ion
Housing material	Anodized aluminium
Dimensions	WxHxD: 60x60x42 mm [2.36x2.36x1.65"]
Weight	186 g [6.6 oz]

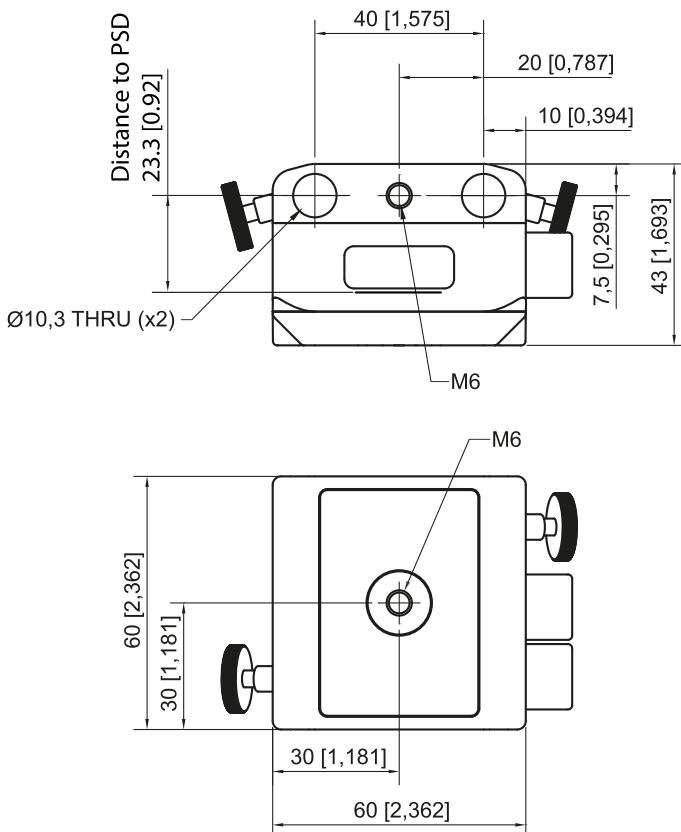

Measuring unit EM/ES, Part No. 12-0434 / 12-0433





LASER
2






UK
CA





CE

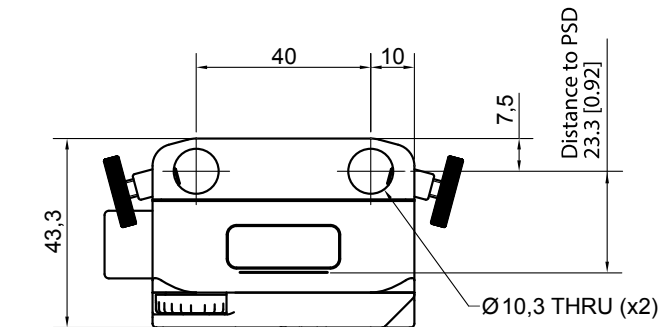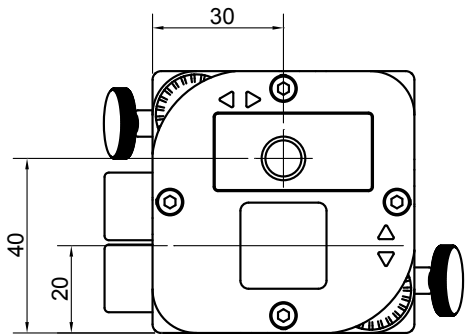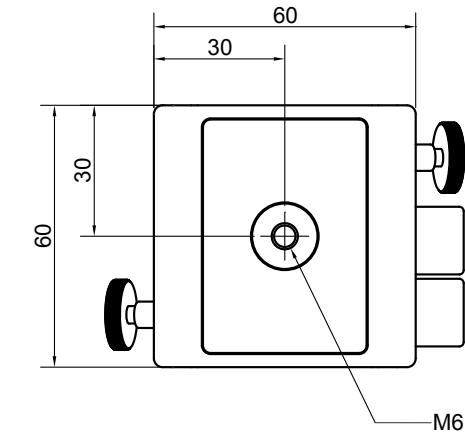Measuring unit PSD 20x20 mm. EM: Part No. 12-0434, ES: Part No. 12-0433	
Type of detector	2-axis PSD 20x20 mm [0.78" sq]
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±1µm ±1%
Measurement range	Up to 20 m [66 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10-17 µs.
Electronic inclinometer	0,1° resolution
Thermal sensors	± 1° C accuracy
Environmental protection	IP class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Internal battery	Li Ion
Housing material	Anodized aluminium
Dimensions	WxHxD: 60x60x42 mm [2.36x2.36x1.65"]
Weight	202 g [7.1 oz]

mm [inch]





Measuring unit ELM40 / ELS40, Part No. 12-0776 / 12-0777


 <div style="display: flex; align-items: center; justify-content: center;">  <div style="text-align: center;"> <p>LASER 2</p> </div>  </div> <div style="display: flex; align-items: center; justify-content: center; margin-top: 5px;">   </div>	
Wireless communication	BT wireless technology Contains FCC ID: PVH0946 / IC:5325A-0946
Internal battery	Li Ion
Type of detector	True PSD 30 mm [1.2"]
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±5µm ±1%
Measurement range	Up to 10 m [33 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 8 nJ. PULSE DURATION 4–6 µs.
Electronic inclinometer	0.1° resolution
Thermal sensors	-20–60 °C [-4–140 °F]
Environmental protection	IP class 65
Operating temperature	-10–50 °C [14–122 °F]
Housing material	Anodized aluminium / ABS plastics
Dimensions	WxHxD: 69.0x61.5x41.5 mm [2.72x2.42x1.63"]
Weight	164 g [5.8 oz]

ELM40/ELS40

mm [inch]

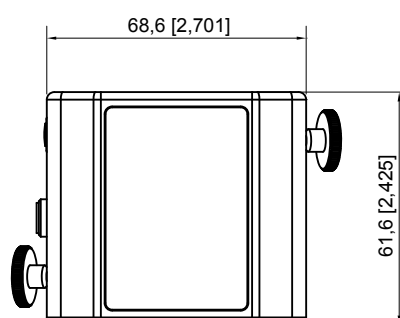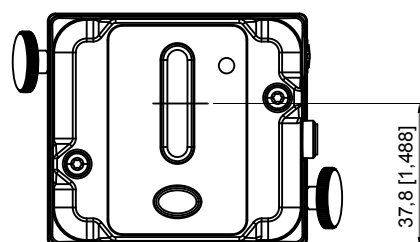

ELM40/ELS40
ELM20/ELS20

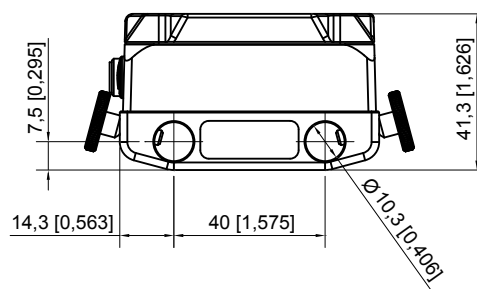

Measuring unit XT40-M, XT40-S, Part No. 12-0943 / 12-0944




mm [inch]



Measuring unit PSD 30 mm. XT40-M: Part No. 12-0943, XT40-S: Part No. 12-0944

Type of detector	TruePSD 30 mm [1.2"]
Communication	BT wireless technology
Battery type	Heavy duty Li Ion chargeable
Operating time	Up to 24 h continuously
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±5µm ±1%
Measurement range	Up to 10 m [33 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 8 nJ. PULSE DURATION 4-6 µs.
Electronic inclinometer	0.1° resolution
Environmental protection	IP class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95%
OLED display	128x64 pixels
Housing material	Anodized aluminium + PC/ABS + TPE
Dimensions	WxHxD: 76x76.5x39.3 mm [3.0x3.0x1.5"]
Weight	245 g [8.6 oz]


39,3 [1,547]

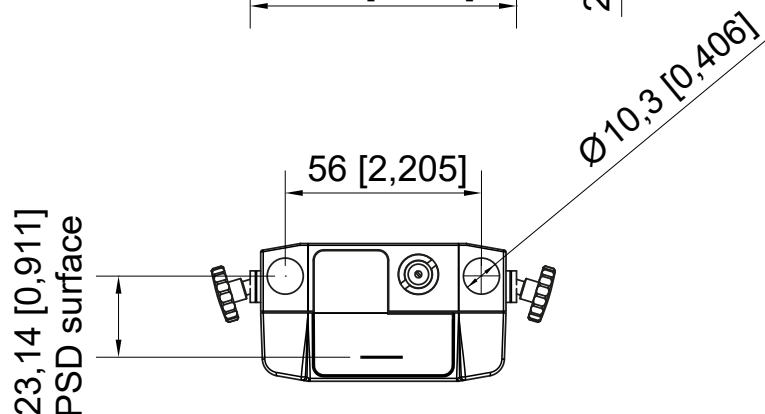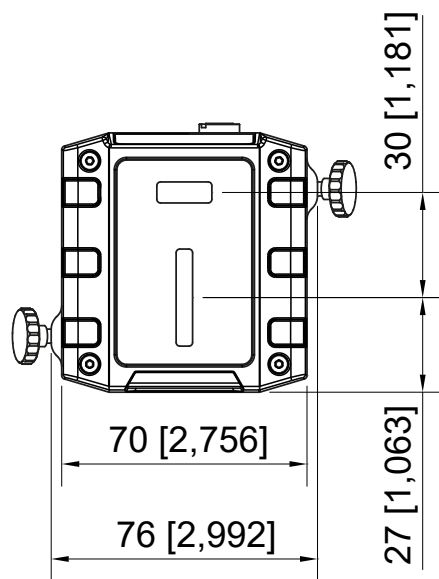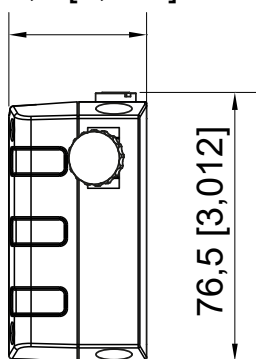

Measuring unit XT60-M, XT60-S, Part No. 12-1028 / 12-1029


mm [inch]

 <div style="display: flex; align-items: center; justify-content: center;">  <div style="text-align: center;"> <p>LASER 2</p> </div>  </div> <div style="display: flex; align-items: center; justify-content: center; margin-top: 10px;">   </div>	
Measuring unit PSD 20x20 mm. XT60-M: Part No. 12-1028, XT60-S: Part No. 12-1029	
Type of detector	1-axis TruePSD 20x20 mm [0.79x0.79"]
Communication	BT wireless technology
Battery type	Heavy duty Li Ion chargeable
Operating time	Up to 24 h continuously
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±1µm ±1%
Measurement range	Up to 20 m [66 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10-17 µs. WAVELENGTH 630-680 nm.
Electronic inclinometer	0.1° resolution
Environmental protection	IP class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95%
OLED display	128x64 pixels
Housing material	Anodized aluminium + PC/ABS + TPE
Dimensions	WxHxD: 76x76.5x45.9 mm [3.0x3.0x1.8"]
Weight	272 g [9.6 oz]

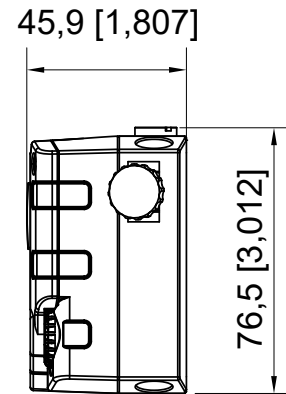

Measuring unit XT70-M, XT70-S, Part No. 12-1045 / 12-1046

 <div style="display: flex; align-items: center; justify-content: center;">  <div style="text-align: center;"> <p>LASER 2</p> </div>  </div> <div style="display: flex; align-items: center; justify-content: center; margin-top: 10px;">   </div>	
Measuring unit PSD 20x20 mm. XT70-M: Part No. 12-1045, XT70-S: Part No. 12-1046	
Type of detector	2-axis TruePSD 20x20 mm [0.79x0.79"]
Communication	BT wireless technology
Battery type	Heavy duty Li Ion chargeable
Operating time	Up to 24 h continuously
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	±1µm ±1%
Measurement range	Up to 20 m [66 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10-17 µs. WAVELENGTH 630-680 nm.
Electronic inclinometer	0.1° resolution
Environmental protection	IP class 66 and 67
Operating temperature	-10–50 °C [14–122 °F]
Storage temperature	-20–50 °C [-4–122 °F]
Relative humidity	10–95%
OLED display	128x64 pixels
Housing material	Anodized aluminium + PC/ABS + TPE
Dimensions	WxHxD: 76x76.5x45.9 mm [3.0x3.0x1.8"]
Weight	272 g [9.6 oz]

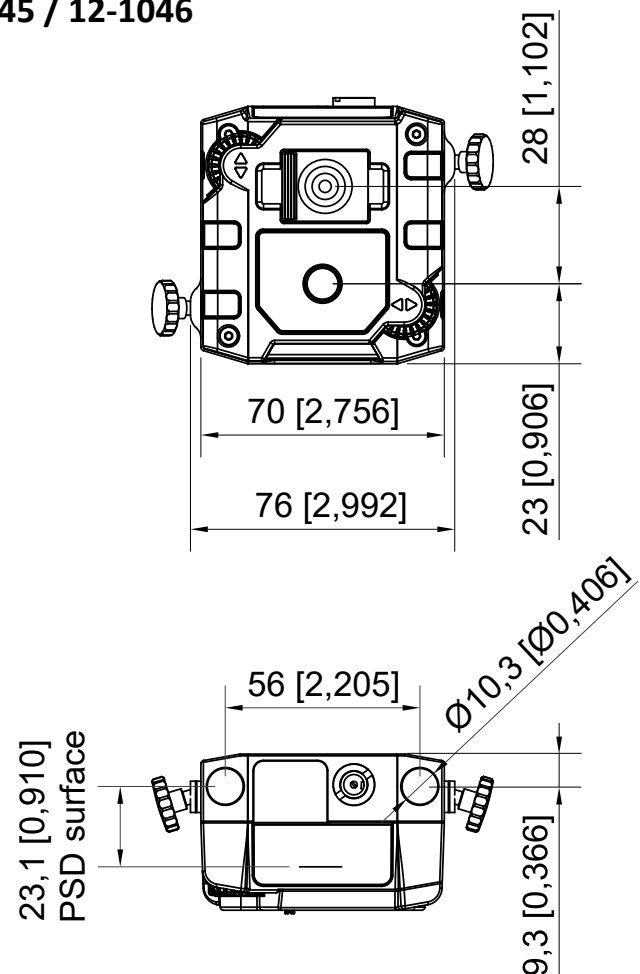




Measuring unit XT50-M, XT50-S, Part No. 12-1026 / 12-1027

mm [inch]



Easy-Laser® XT50 measuring units are approved in accordance with the latest ATEX directive.
 EX certificate number: Presafe 17 ATEX 10552X, IECEx PRE 17.0049X
 ATEX code: II 2 G
 EX classification: Ex ib op is IIC T4 Gb, $-10^{\circ}\text{C} \leq T_a \leq +50^{\circ}\text{C}$
 II=Indicates that the instrument is approved for all areas except mines
 2=Unit category. Intrinsically safe equipment for zones 1 and 2 (likely occurrence of explosive atmosphere)
 G=Indicates atmosphere: Gas, Vapours, Mists
 ib=Type of protection from an explosion
 IIC=Explosion group
 T4=Temperature class

Measuring unit PSD 20x20 mm. XT50-M: Part No. 12-1026, XT50-S: Part No. 12-1027	
Type of detector	TruePSD 1 axis 20x20 mm [0.79x0.79"]
Communication	BT wireless technology
Battery type	Heavy duty Li Ion chargeable
Operating time	Up to 20 h continuously
Resolution	0.001 mm [0.05 mils]
Measurement accuracy	$\pm 1\mu\text{m} \pm 1\%$
Measurement range	Up to 20 m [66 feet]
Type of laser	Diode laser
Laser wavelength	630–680 nm
Laser class	Safety class 2
Laser output	AVERAGE POWER < 0.6 mW. PULSE ENERGY < 20 nJ. PULSE DURATION 10–17 μs . WAVELENGTH 630–680 nm.
Electronic inclinometer	0.1° resolution
Environmental protection	IP class 66 and 67
Operating temperature	$-10\text{--}50^{\circ}\text{C}$ [$14\text{--}122^{\circ}\text{F}$]
Storage temperature	$-20\text{--}50^{\circ}\text{C}$ [$-4\text{--}122^{\circ}\text{F}$]
Relative humidity	10–95%
OLED display	128x64 pixels
Housing material	Anodized aluminium + PC/ABS + TPE
Dimensions	WxHxD: 76x76.5x50.9 mm [3.0x3.0x2.0"]
Weight	316 g [11.1 oz]

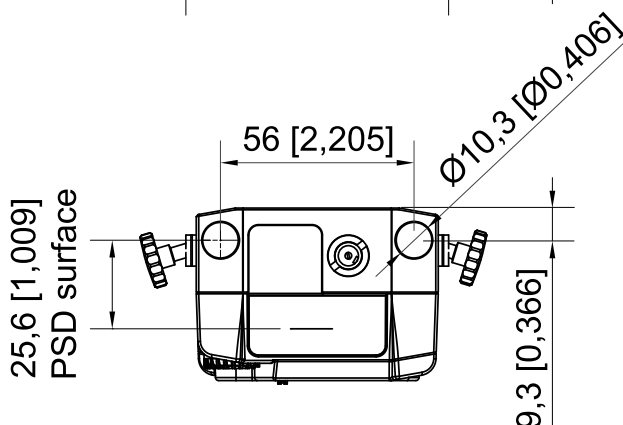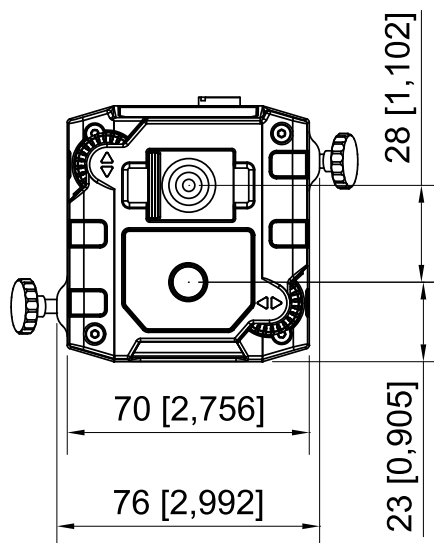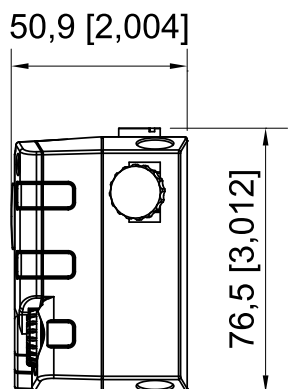


E- and XT-series wireless detector for BTA, Part No. 12-1054

mm [inch]



Sheave diameters	>60 mm [2.5"]
Measurement distance	40 mm to 3 m [1.6" to 10'] (laser LOW power mode)
	0.5 m to 10 m [20" to 33'] (laser HIGH power mode)
Measurement range	Axial offset: ± 3 mm [0.12"]. Angular value: $\pm 8^\circ$
Displayed resolution	Offset: 0.1° , Angle: 0.01°
Display type	Yellow OLED 96x96 pixels
Connection	BT wireless technology
Battery type	Li ion rechargeable
Battery operation	Up to 5 hours continuously
Material	ABS plastics / Anodized aluminium
Dimensions	WxHxD: 95x95x36 mm [3.7x3.7x1.4"]
Weight	190 g [6.7 oz]

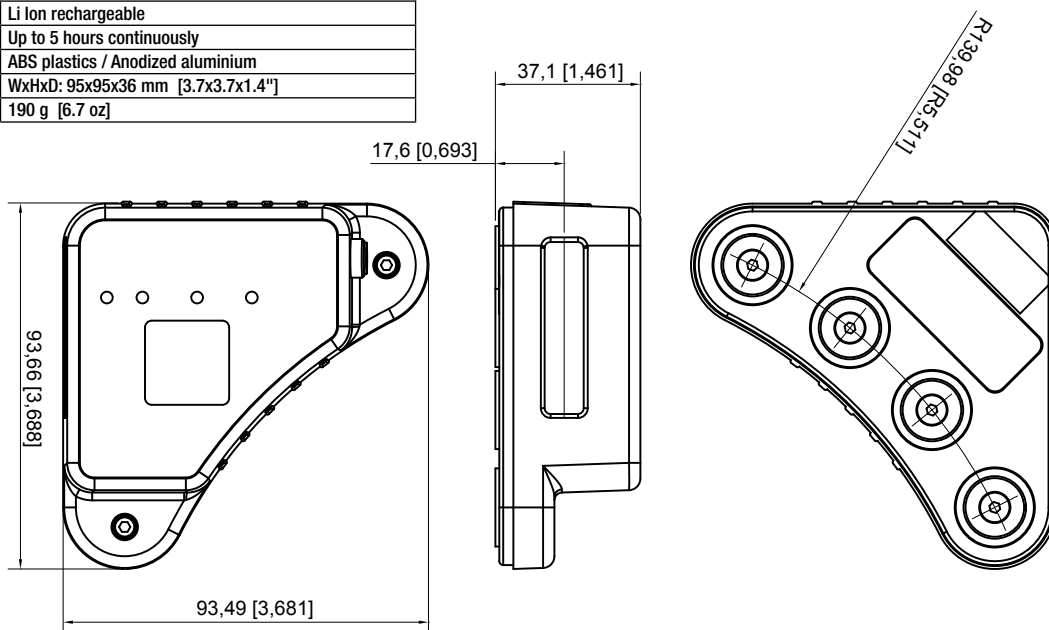


Laser transmitter BTA, Part No. 12-1325



LASER
2



Sheave diameters	>60 mm [2.5"] and larger
Measurement distance	40 mm to 3 m [1.6" to 10'] (LOW power mode)
	0.5 m to 10 m [20" to 33'] (HIGH power mode)
	Distances are for analogue targets and can vary depending on ambient light conditions.
Laser class	2
Output power (average)	< 0.6 mW (LOW power mode)
	< 4.8 mW (HIGH power mode)
Laser wavelength	630–680 nm
Beam angle	60°
Accuracy	Laser plane – Reference plane: Parallelity: $< 0.05^\circ$, Offset < 0.2 mm [0.008"]
Battery type	1xR6 (AA) 1.5 V
Battery operation	Up to 12 hours continuously
Material	ABS plastics / Hard anodized aluminium
Dimensions	WxHxD: 145x86x30 mm [5.7x3.4x1.2"]
Weight	265 g [9.35 oz]

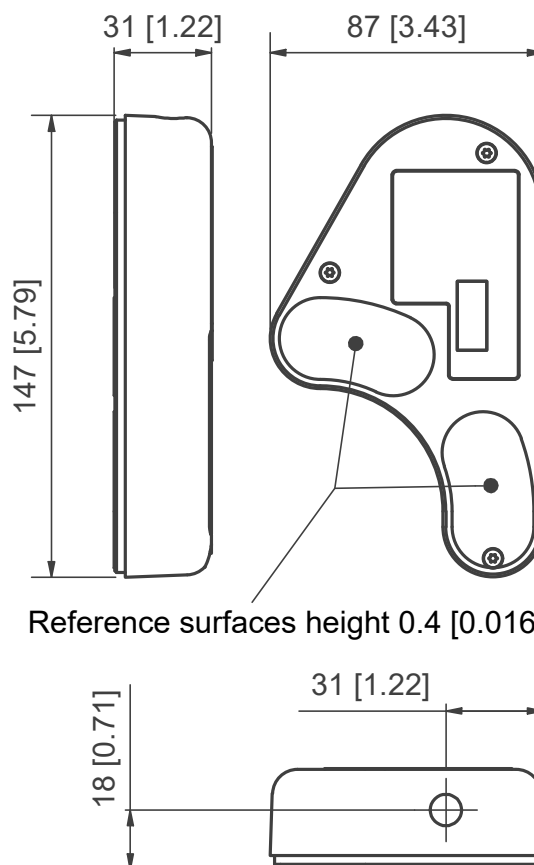

Reference surfaces height 0.4 [0.016]

Note: New products in rev23 marked with **Bold** letters.

Part No.	Description	Page
01-0039	Locking screw.....	67
01-0042	Nut (for chain).....	67
01-0045	Barrel nut.....	67
01-0048	Rod tightening tool, 4 mm.....	67
01-0076	Offset bracket, D-series.....	73
01-0139	Machine/Magnet base pin for D22, short.....	55
01-0618	Top for D23.....	67
01-0777	Tube adapters for E9 and D157.....	50
01-0847	Shim remover.....	76
01-0938	Rod, 30 mm.....	50
01-1095	Key holder.....	71
01-1165	Offset bracket for E-series.....	48
01-1333	Machine/Magnet base pin for D22, long.....	55
01-1352	Sunvisor for D6.....	73
01-1379	Protective case for display unit E418.....	64
01-1402	Screw for safety strap.....	65
01-1703	Velcro clip with pin.....	80
01-1768	Angle bracket.....	76
01-1866	Locking screw for XT units.....	67
01-1945	LCD display protection film.....	68
01-1952	Replaced by 12-1039.....	77
01-1953	Locking screw.....	67
01-2222	Tube adapters for dual barrels.....	51
01-2232	Tripod adaptor for Angular prism.....	59
03-0032	Printer 220 V.....	73
03-0041	Thermo paper roll.....	68
03-0042	Protective case for older display units.....	78
03-0061	Screw M6x14.....	67
03-0241	Printer cable.....	62
03-0341	Printer 110 V.....	73
03-0333	PC cable.....	62
03-0505	Screw for D23 top cover.....	67
03-0591	Padded case for BTA.....	68
03-0592	Protective case for display unit D279.....	78
03-0633	Connecting strip (with set screws).....	57
03-0722	USB/RS232 adaptor.....	62
03-0736	Case for BTA Ex.....	78
03-0769	Aluminium beam, 500 mm [19.68"].....	57
03-0770	Aluminium beam, 600 mm [23.62"].....	57
03-0771	Aluminium beam, 1100 mm [43.31"].....	57
03-0792	Plastic case for small items.....	64
03-0799	Protective case for display unit D336.....	78
03-0810	Replaced by 01-1953.....	67
03-0821	Replaced by 03-1243.....	62
03-0822	USB A – USB B cable.....	62
03-0824	Measuring tape, 3 m [9.8'].....	65
03-0842	Measuring tape, 5 m [16.4'].....	65
03-0878	Cleaning cloth.....	68
03-0892	Charger cable, EUR.....	62
03-0893	Charger cable, USA.....	66
03-0894	Charger cable, UK.....	62
03-0895	Charger cable, AUS.....	62
03-0901	HDMI to HDMI cable.....	62
03-0902	VGA to VGA cable.....	63
03-0909	Transportation case.....	64
03-0914	USB memory.....	71
03-0967	Hexagon wrench set.....	65
03-0972	LCD display protection film.....	68
03-1004	Printer for E-series.....	63
03-1007	Carrying case for system E540 and E530.....	73
03-1043	USB cable for streaming values.....	78
03-1044	Back pack system, medium.....	73
03-1045	Back pack system, large.....	73
03-1046	Luggage trolley.....	77
03-1059	Carrying case for system E420.....	76
03-1184	Vapor capsule.....	68
03-1193	White Vaseline.....	74
03-1203	DC cable extension 1.5 m.....	77
03-1243	Charger for E-series Display unit.....	62
03-1256	Charger for XT-series.....	62
03-1291	Gauge block.....	59
03-1323	Printer for D-series.....	78
03-1326	Stinger for XT280.....	66
03-1327	Accelerometer magnet for XT280.....	66
03-1332	Demo unit, steel.....	65
03-1338	Tripod head.....	70
03-1406	Safety strap.....	65
03-1429	Screw driver Torx T8.....	68
03-1459	Charger for E-series printer.....	70
04-0053	Sticker "This machine is aligned with Easy-Laser®".....	68
04-0124	Easy-Laser® logo sticker, large.....	71
04-0125	Easy-Laser® logo sticker, small.....	71
04-0146	Laser target sticker.....	68
04-0147	Bar code sticker.....	74
04-0252	Easy-Laser® logo stickers on sheet.....	71
04-0307	QR code sticker.....	68
05-0792	Notebook for the technician.....	71
06-0001	CD.....	73
12-0001	Measuring unit M, D-series, PSD 10x10mm.....	75
12-0002	Measuring unit S, D-series, PSD 10x10mm.....	75
12-0005	Detector D5.....	75
12-0012	Measuring tape, 2m [6.5'].....	73
12-0013	Magnet base.....	45
12-0016	V-bracket with chain.....	47
12-0022	Laser transmitter D22.....	39
12-0032	Detector Linebore.....	75
12-0033	Standard chain.....	74
12-0034	System D650 Linebore.....	72
12-0039	Sliding bracket.....	73
12-0045	Magnet base with turnable head.....	45
12-0046	Angular prism D46.....	76
12-0059	Rods, 60 mm [2.36"].....	50
12-0060	Rods, 240 mm [9.44"].....	50
12-0074	Red cable 2.0 m [78.7"].....	61
12-0075	Laser transmitter D75.....	39
12-0108	Red cable, extension, 5.0m [16.4"].....	61
12-0110	Tilt table.....	54
12-0116	Measuring unit M, D-series, PSD 18x18mm, 2 axis.....	75
12-0119	Measuring unit M, D-series, PSD 18x18mm.....	75
12-0120	Measuring unit S, D-series, PSD 18x18mm.....	75
12-0125	Cardan bracket set D-series.....	77
12-0128	Extension chain, set.....	47
12-0130	V-bracket.....	67
12-0132	Offset hub for D75.....	75
12-0133	System D600 Machine.....	72
12-0134	Foot set for linebore arms.....	52
12-0137	Sliding bracket with turnable head.....	50
12-0138	Sliding bracket with magnets and probe.....	49
12-0139	Target Cardan.....	60
12-0143	Foot set for linebore for 100–150mm.....	52
12-0146	Laser transmitter D146.....	77
12-0149	Rod bracket for laser D75.....	54
12-0154	Magnets for offset hub arms.....	53
12-0157	Detector D157.....	76
12-0168	Laser transmitter D23.....	39
12-0169	Rotating detector bracket for rods.....	45
12-0179	Red cable 1.0m [39.3"].....	61
12-0180	Red cable, extension, 10.0 m [32.8'].....	61
12-0185	System D660 Turbine.....	72
12-0187	Bracket for laser D75.....	54
12-0188	Side support for D5.....	74
12-0189	Side support for D75.....	74
12-0193	System D630 Extruder.....	72
12-0199	Large target extruder.....	73
12-0201	Detector D6.....	75

12-0202	Sliding table for tripod	58	12-0442	Carrying case for system E710	64
12-0203	Parallelity kit	58	12-0443	Centering target for turbine	58
12-0205	AC adaptor for D22 and D75	73	12-0455	Slide bracket 120mm	52
12-0207	System D505 Shaft	72	12-0456	Transportation case Ex large	73
12-0213	Target for BTA, 15 mm	67	12-0476	Cam shaft bracket	74
12-0220	System D800 Spin	72	12-0490	Short ball top probe	57
12-0224	System D670 Parallelism	72	12-0494	Red cable 0.16m [6.3"]	78
12-0230	Magnet base with linear digital scale	77	12-0495	Shoulder strap for display unit E418	65
12-0231	System D525 Shaft	72	12-0503	Bracket (Set square) for transmitter	46
12-0235	System D525 B Shaft/Geometry	72	12-0508	Radial support for magnet base	46
12-0236	Demo unit Sheave	65	12-0509	Detector E5	41
12-0237	Transportation case cardan	64	12-0510	Slide bracket 300mm	52
12-0246	Laser transmitter D246	74	12-0525	System E910 Flange	32
12-0248	Detector bracket Long stroke for turbine	75	12-0526	System E915 Flange Spin	31
12-0255	Detector 30mm	75	12-0537	Offset hub with counterlock and tilt function	53
12-0256	Measuring unit M, D-series, PSD 30x30 mm	75	12-0538	Detector Extruder 20mm	75
12-0258	Shims case, 180 shims	69	12-0543	Slide bracket 200mm	52
12-0259	Shims case, 360 shims	69	12-0544	Target 100x100m	59
12-0260	Measuring unit S, D-series, PSD 30x30 mm	75	12-0552	System D640 Machine tool	72
12-0269	Tripod	58	12-0553	Bore bracket adapter plate	52
12-0279	Display unit D279	76	12-0568	Mounting pin for D146	77
12-0282	Extension arms linebore	53	12-0573	VGA kit	74
12-0283	Vibrometer probe D283	74	12-0579	Magnet base with adapter Ex	77
12-0289	Red cable 0.4m [15.7"]	78	12-0580	Axial extension arms, linebore	53
12-0294	AC adaptor for D23	73	12-0583	Pointing bracket on magnet base	46
12-0300	System D450 Shaft	72	12-0585	Charger 12-36 V for car	74
12-0303	Sliding bracket with magnets	49	12-0587	Sun visor for E-series	77
12-0308	Detector/display unit for belt alignment	75	12-0588	Target E-series	59
12-0309	Laser transmitter for sheave alignment systems	77	12-0590	AC adaptor for display unit D279	74
12-0310	System D150 BTA	73	12-0592	Sun visor for Ex units	74
12-0314	Detector arms Linebore	52	12-0594	Laser transmitter D25	39
12-0319	Extension chain	73	12-0597	Splitter box	61
12-0320	Rod adapter for D157	77	12-0603	Handheld detector bracket	55
12-0321	Cable support	61	12-0608	Magnet base with turnable head, for D157	74
12-0324	Rods, 120 mm [4.72"] 8 pcs	50	12-0615	Cardan bracket for E-series	77
12-0329	Magnet base bracket for linebore detector	73	12-0617	Battery pack	74
12-0334	Measuring unit M, Ex	76	12-0618	Battery pack with built-in wireless unit	76
12-0335	Measuring unit S, Ex	76	12-0619	Barcode reader	63
12-0336	Display unit D336 Ex	76	12-0622	Tool kit for tilt table	55
12-0337	Shaft bracket with chain, stainless steel	48	12-0625	Standard chains	47
12-0340	System D550 Shaft Extreme™	72	12-0628	Bracket for non-magnetic flanges, with handheld det.	74
12-0341	Self centering bracket	56	12-0652	System D652 Linebore	72
12-0343	Slide bracket 100mm	77	12-0656	Vibrometer probe E285	74
12-0360	Tool kit for system D550	75	12-0657	Detector for belt alignment E-series	75
12-0362	Cable tester	74	12-0659	E170 BTA	73
12-0363	Extension chain, stainless steel	48	12-0661	Offset hub with counterlock, for D75	52
12-0364	Offset hub with arms	75	12-0662	System D662 Turbine	72
12-0384	Offset hub arms	53	12-0663	System D663 Turbine	72
12-0385	Laser transmitter bracket turbine	54	12-0664	System D664 Turbine	72
12-0386	Chain, stainless steel	67	12-0676	System E950-A	25
12-0390	Laser transmitter for sheave alignment Ex	74	12-0677	System E950-B	26
12-0394	Target for BTA, 18 mm	67	12-0695	System E530 Shaft	72
12-0400	System D130 BTA Ex	73	12-0696	Small magnet base with turnable head	52
12-0402	Target Ex cardan	59	12-0697	Measuring unit ELS 30	75
12-0403	Detector for belt alignment D-series	75	12-0698	Measuring unit ELM 30	76
12-0404	Display unit for sheave/pulley alignment	76	12-0700	Display unit E52	69
12-0411	System D160 BTA	72	12-0702	Detector E4	75
12-0412	Replaced by 12-1012	48	12-0706	Laser transmitter D25 with offset hub	40
12-0413	Replaced by 12-1147	73	12-0707	Arm kit with magnets	53
12-0415	System D90 BTA	77	12-0709	Measuring unit holder for Angular prism	77
12-0416	Demo unit Shaft	65	12-0710	System E960-A	23
12-0417	Height adjustment bracket for detector D6	73	12-0711	System E960-B	24
12-0418	Display unit E51 (formerly E418)	38	12-0715	Detector bracket "Long stroke" Turbine	56
12-0422	System D480 Shaft	72	12-0725	Splitter cable for charging	60
12-0423	Measuring unit M, D-series, PSD 10x10mm, Incl.	75	12-0727	System E980 Sawmill	21
12-0424	Measuring unit S, D-series, PSD 10x10mm, Incl.	75	12-0728	Splitter cable for charging two 12-0738	61
12-0433	Measuring unit S, E-series, PSD 20x20mm	43	12-0735	Red cable with angled connector	78
12-0434	Measuring unit M, E-series, PSD 20x20mm	43	12-0738	BT wireless unit with battery	74
12-0436	BT wireless unit	70	12-0739	BT wireless units kit for E530	77
12-0438	Detector bracket Short stroke for turbine	56	12-0740	Batterypack with wireless unit, Kit	77
12-0439	Ball top probe	57	12-0742	Tilt table with magnet base	77
12-0440	System E710 Shaft	13	12-0743	Shim case 3	69

12-0745	System E420 Shaft.....	76	12-0992	Replaced by 12-1017	46
12-0746	Measuring unit ELM 20	76	12-1008	Offset bracket	48
12-0747	Measuring unit ELS 20	76	12-1010	Sliding bracket	49
12-0748	Display unit E53	76	12-1011	Replaced by 12-1147	73
12-0750	Replaced by 12-0989	61	12-1012	Thin chain bracket.....	48
12-0751	DC to USB adapter	61	12-1017	Magnetic brackets and rods, kit.....	46
12-0752	Detector E7.....	41	12-1018	Angular adapter for detector, 90°	78
12-0755	Shim case 4.....	69	12-1019	Titanium rods, set of 3.....	56
12-0758	Detector E8, 1-axis PSD	76	12-1020	Carrying case Large for system E540	64
12-0759	Detector E9, 2-axis PSD	41	12-1025	Carrying case Small for system E540	73
12-0761	System E940 Machine tool	72	12-1026	Measuring unit XT50-M Ex/ATEX.....	44
12-0762	"Red cable", extension 0.5 m [1.6'].....	78	12-1027	Measuring unit XT50-S Ex/ATEX.....	44
12-0767	Rod adapter with built-in target.....	51	12-1028	Measuring unit XT60-M.....	43
12-0768	Slide bracket, width 25 mm [0.99"].....	51	12-1029	Measuring unit XT60-S.....	43
12-0771	System E920 Geometric	30	12-1031	System XT550 Ex/ATEX without Display unit	11
12-0772	System E950-C.....	27	12-1038	Extension chain stainless steel, set.....	48
12-0775	System E540-B.....	72	12-1039	Pin for hub.....	77
12-0776	Measuring unit ELM 40	76	12-1040	V-bracket with stainless steel chain and rods.....	47
12-0777	Measuring unit ELS 40	76	12-1043	System E540-A.....	72
12-0787	Spindle bracket for measuring unit.....	78	12-1045	Measuring unit XT70-M.....	44
12-0788	System E930 Extruder	29	12-1046	Measuring unit XT70-S.....	44
12-0789	Measuring unit ESH, HyperPSD™	77	12-1047	Measuring probe, cylindrical	57
12-0790	Measuring unit EMH, HyperPSD™	78	12-1048	Measuring probe, cylindrical, with magnet	57
12-0791	E-series wireless detector for belt alignment.....	75	12-1049	Carrying case L for system XT440/XT660/XT770.....	63
12-0794	Target E-series 20x20	60	12-1051	System XT660 with Display unit, case M.....	78
12-0796	System E180 BTA	73	12-1052	System XT660 with Display unit, case L.....	78
12-0797	System Vestas 4.....	76	12-1053	System XT190 BTA	14
12-0799	Detector E3.....	41	12-1054	Detector unit for system XT190 BTA	41
12-0801	Measuring probe Ruby diameter 2.5mm.....	59	12-1058	System XT660 without Display unit, case M	10
12-0804	Transportation case for BTA systems	64	12-1059	System XT660 without Display unit, case L	10
12-0805	Measuring probe Ruby diameter 5mm.....	59	12-1060	Extension chain, set for E- and XT-series	48
12-0810	Large target extruder.....	60	12-1064	Laser transmitter D26.....	77
12-0814	Tube bracket	56	12-1086	ECOM Tab Display unit.....	74
12-0815	Adapter bracket for rod distance 40 mm.....	74	12-1090	XT280 Vibrometer, complete set.....	17
12-0823	Laser transmitter E30 Long Range	40	12-1092	Small magnet base.....	77
12-0824	Detector E7H, HyperPSD™	78	12-1095	System XT770 with Display unit	78
12-0825	System Vestas 3	76	12-1096	System XT770 without Display unit.....	9
12-0828	Offset hub with counterlock and tilt function.....	53	12-1097	System XT550 Ex/ATEX with Display unit	78
12-0840	VGA kit, for serial number 94177 and newer.....	63	12-1113	GA1 system+brackets for coupling assembled.....	19
12-0845	Detector E2.....	76	12-1114	GA1 brackets for coupling removed.....	19
12-0846	Digital Precision Level E290	41	12-1118	System Easy-Laser® GA1	19
12-0849	Roll bracket.....	76	12-1123	Extension for set square 12-1087, 295 mm	46
12-0850	System E180 without laser transmitter 12-0309.....	73	12-1124	Extension for set square 12-1087, 430 mm	46
12-0853	System E970 Parallelism	22	12-1125	DM-bracket	49
12-0854	System E975 Roll Alignment	72	12-1027	System XT770, with GEO Kit, with Display unit	78
12-0855	Upgrade kit Long stroke.....	77	12-1028	System XT770, with XT20 GEO Kit	8
12-0856	Roll alignment kit.....	76	12-1129	Extension for DM-bracket	45
12-0857	Digital Precision Level, complete kit.....	42	12-1130	DM-bracket, complete set.....	49
12-0858	Laser transmitter E30 Long Range, with tilt table.....	40	12-1132	Carrying case large for XT770, with XT20/XT22.....	63
12-0864	Tilt table, turnable	55	12-1133	Magnet base with turnable top	45
12-0874	Adapter plate for tilt table to magnet base.....	54	12-1136	Angular prism	58
12-0885	Large roll kit.....	76	12-1142	Vestas 6 wind shaft system.....	18
12-0901	Extension kit for large diameters	51	12-1143	Vestas 5 wind shaft system.....	18
12-0915	Safety strap	74	12-1147	Magnetic bracket	47
12-0937	Height adjustment bracket for detector	77	12-1151	Cardan bracket set.....	50
12-0943	Measuring unit XT40-M.....	43	12-1161	Rods, 75 mm [2.95"], 4 pcs	50
12-0944	Measuring unit XT40-S.....	43	12-1183	Vestas Installation kit upgrade.....	18
12-0949	Replaced by 12-1118	19	12-1196	ECOM Tab-Ex 02 Display unit.....	77
12-0954	System E950-D Bore alignment	28	12-1200	Sliding table for magnet base.....	59
12-0955	System E720 Shaft/Geo.....	72	12-1205	Sun visor for XT40.....	59
12-0961	XT11 Display unit for Generation XT	77	12-1209	Rotating detector bracket for rods, E and XT	45
12-0963	Shaft bracket with chain and rods	47	12-1210	Magnet bracket long, with turnable head	45
12-0966	System XT440 without Display unit.....	12	12-1211	Magnet bracket short, with turnable head	46
12-0967	System XT440 with Display unit XT11	78	12-1221	Angular prism, kit.....	58
12-0968	IR Camera added to XT11	78	12-1225	AC adaptor for D23	60
12-0972	Carrying case Small for system XT440	74	12-1239	Carrying case Small for system XT440	82
12-0973	Carrying case Medium for system XT440/XT660.....	63	12-1244	System XT290 Digital precision level	16
12-0985	Camera removed from XT11	78	12-1262	Detector bracket for centering on wire position.....	46
12-0987	Rods, 120 mm [4.72"], 4 pcs	50	12-1270	Extruder bracket for fluted barrels.....	51
12-0988	Bar bracket.....	78	12-1272	XT20 Laser transmitter	39
12-0989	DC split cable for charging.....	61	12-1273	XT22 Laser transmitter	39
12-0990	Adjustable magnet for offset hub arms	53	12-1275	Multi-bracket XT laser	54

12-1277	Bracket with rotatable bore probe, XT	55
12-1279	Extruder cardan joint	70
12-1280	Extruder bracket handle.....	70
12-1281	Charger for XT550/XT50	62
12-1282	Bracket with rotatable bore probe, E-series.....	56
12-1284	Vestas 5.5 - Mechanical bracket Kit	18
12-1290	Case for laser transmitters XT20/XT22	64
12-1291	XT12 Display unit.....	38
12-1292	XT12 Display unit with IR camera.....	38
12-1293	XT20 Kit in case.....	39
12-1294	XT22 Kit in case.....	39
12-1296	XT980 Sawmill system with Display unit	78
12-1300	Mounting screws for XT transmitters	70
12-1325	BTA Laser transmitter with 2 power modes.....	40
12-1327	ecom TabEx 03.....	38
12-1332	System D92 BTA.....	15
12-1334	System XT770, with XT22 GEO kit.....	8
12-1335	System XT980 without display unit.....	20
12-1336	Wireless unit (Version 2, ESP32-MINI-1)	60
13-0004	Cap	71
13-0006	Pen	71
13-0007	Playing cards	71
13-0012	A5 Notes	71
13-0013	Keychain with spirit level.....	71

Note: New products in rev23 marked with **Bold** letters.

Handwriting practice area with horizontal dotted lines.

Handwriting practice area with horizontal dotted lines.

Easy-Laser® is manufactured by Easy-Laser AB, Alfagatan 6, SE-431 49 Mölndal, Sweden
Tel +46 31 708 63 00, Fax +46 31 708 63 50, e-mail: info@easylaser.com, www.easylaser.com
© 2023 Easy-Laser AB. We reserve the right to make changes without prior notification.
Easy-Laser® is a registered trademark of Easy-Laser AB. Android, Google Play, and the Google Play logo are trademarks of Google Inc. Apple, the Apple logo, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Other trademarks belong to their respective owners.

